

Series 2, Wall-mounted cooker hood, 60 cm, Clear glass DWA64BC50B



DHZ1225	Chimney extension 1000 mm
DHZ1235	Chimney extension 1500 mm
DHZ6550	Brushed steel back panel
DHZ6551	Brushed steel back panel
DWZ0XX0J0	Long Life recirculation kit
DWZ1DX1B4	Clean Air Standard odor filter (repl.)
DWZ1DX1I4	Clean Air Standard recirculation kit
DWZ1DX1I6	Clean Air Plus recirculation kit
DWZ1FX5C6	Clean Air Plus recirc. kit external
DWZ1FX5D1	Long Life recirculation kit external
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)

Hood with glass design: performance combined with curved glass design to match your kitchen.

- **LED Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **High extraction rate - for continuously clean air in the kitchen.**
- **3-speed power Level options to suit your cooking style and recipes.**
- **Dishwasher safe aluminum mesh filters**

Typology:Wall-mounted
 Length electrical supply cord: 130.0 cm
 Height of the chimney: 576-897/576-1007 mm
 Height of the appliance: 50 mm
 Minimum distance above an electric hob: 550 mm
 Minimum distance above a gas hob: 650 mm
 Net weight: 12.6 kg
 Type of control: mechanical
 Number of speed settings: 3
 Max. air extraction: 365 m³/h
 Max. air recirculation: 240 m³/h
 Maximum Air flow: 365 m³/h
 Number of lights: 2
 Noise level: 64 dB(A) re 1pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material:Washable aluminium
 EAN code:4242005050901
 Connection rating: 100 W
 Fuse protection: 10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type: GB plug
 Installation typology:Wall-mounted



4 242005 050901

Series 2, Wall-mounted cooker hood, 60 cm, Clear glass DWA64BC50B

**Hood with glass design: performance
combined with curved glass design to
match your kitchen.**

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 365 m³/h
- Noise max. Normal Level: 64 dB*

Features

- Push button control
- 3 power levels
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- 1 metal grease filter cassette
- Designed for wall mounted installation

Design

- Chimney extractor hood
- Mechanical

Performance/technical information


- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Maximum extraction rate exhaust air 365 m³/h according to EN 61591
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 64 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
- Extraction rate in recirculation mode: Max. normal use: 240 m³/h
- Noise level in recirculation mode: Max. normal use: 65 dB(A) re 1 pW
- Light Intensity: 113 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 617-947 x 600 x 488 mm
- Dimensions recirculating (HxWxD): 617-1057 x 600 x 488 mm
- Dimensions recirculating with CleanAir module (HxWxD):
- 686 x 600 x 488 mm - mounting with outer chimney
- 815-1145 x 600 x 488 mm - mounting with telescopic chimney
- Blower Efficiency Class: E*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 53.1 kWh/year*

Optional accessories

- Recirculating kit DHZ1225


* In accordance with the EU-Regulation No 65/2014

**Series 2, Wall-mounted cooker hood,
60 cm, Clear glass
DWA64BC50B**

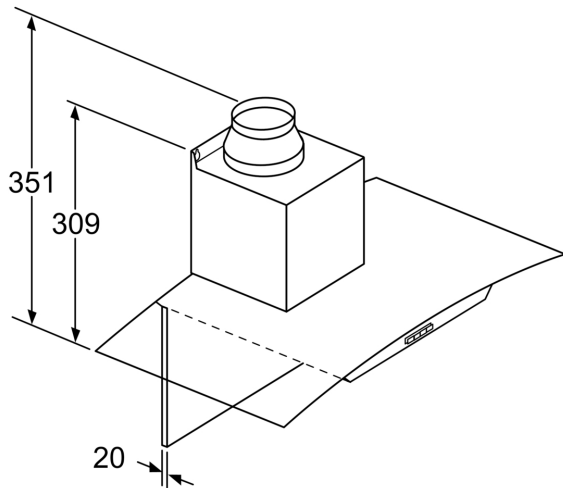


If a back panel is used,
the design of the appliance
must be considered.


measurements in mm

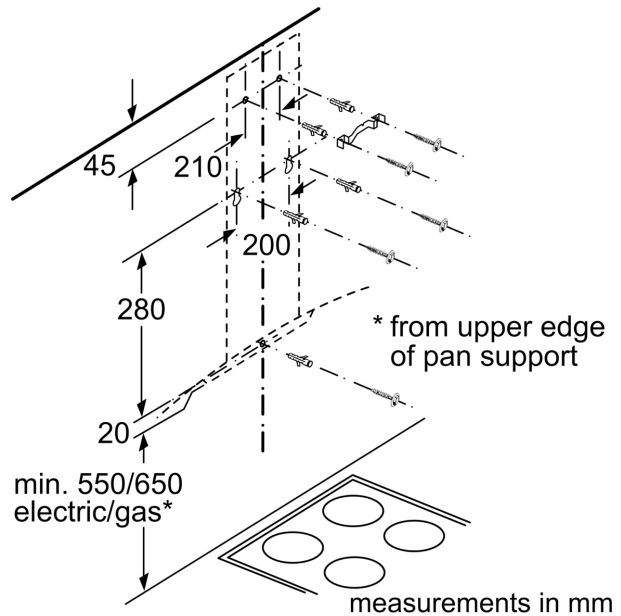

measurements in mm

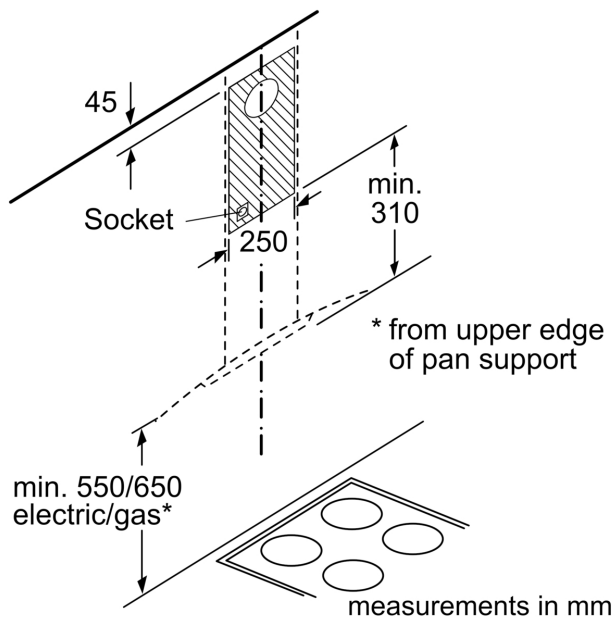


measurements in mm

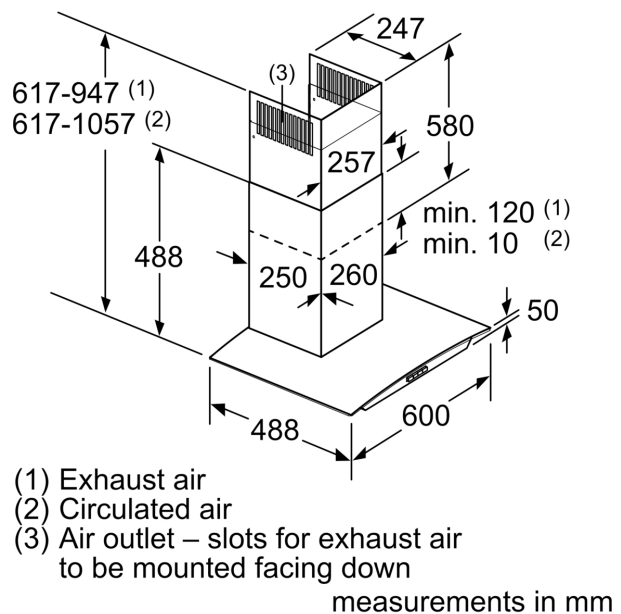

(1) Exhaust air
(2) Circulated air
(3) Air outlet – slots for exhaust air
to be mounted facing down
measurements in mm

measurements in mm

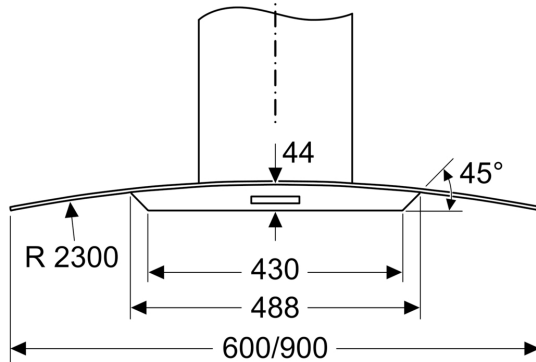

Dimensions for designing rear wall panels.
Please ensure that all dimensions are within
the tolerances. The actual dimensions must
be checked on the appliance in question.