

Series 4, Wall-mounted cooker hood, 60 cm, Clear glass DWA66DM50B



B



DWZ0XX0J0 Long Life recirculation kit, DWZ1DX1B4 Clean Air Standard odor filter (repl.), DWZ1DX1I4 Clean Air Standard recirculation kit, DWZ1DX1I6 Clean Air Plus recirculation kit, DWZ1FX5C6 Clean Air Plus recirc. kit external, DWZ1FX5D1 Long Life recirculation kit external, DZZ0XX0P0 Long Life odor filter (replacement), DZZ1XX1B6 Clean Air Plus odor filter (replacement), DHZ1225 Chimney extension 1000 mm, DHZ1235 Chimney extension 1500 mm, DHZ6550 Brushed steel back panel, DHZ6551 Brushed steel back panel, DWZ0DX0A0 Standard odor filter (replacement), DWZ0DX0U0 Standard recirculation kit

Hood with glass design: performance combined with curved glass design to match your kitchen.

- **Especially silent:** maximum hood performance, minimum noise.
- **TouchSelect control:** Quickly select hood settings via touch.
- **LED Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **Intensive speed setting:** removes strong kitchen odours quickly and effectively.

Typology:Wall-mounted
Length electrical supply cord: 130.0 cm
Height of the chimney: 576-897/576-1007 mm
Height of the appliance: 50 mm
Minimum distance above an electric hob: 550 mm
Minimum distance above a gas hob: 650 mm
Net weight: 14.2 kg
Type of control:Electronic
Number of speed settings: 3-stages + intensive setting
Max. air extraction: 401 m³/h
Boost position output recirculating: 441 m³/h
Max. air recirculation: 337 m³/h
Boost position air extraction: 615 m³/h
Maximum Air flow: 401 m³/h
Number of lights: 2
Noise level: 59 dB(A) re 1pW
Diameter of air outlet: 120 / 150 mm
Grease filter material:Washable aluminium
EAN code: 4242005050932
Connection rating: 220 W
Fuse protection:10 A
Voltage: 220-240 V
Frequency: 50; 60 Hz
Plug type: GB plug
Installation typology:Wall-mounted



4 242005 050932

Series 4, Wall-mounted cooker hood, 60 cm, Clear glass DWA66DM50B

**Hood with glass design: performance
combined with curved glass design to
match your kitchen.**

- Average Energy Consumption: 45.6 kWh/year*

Optional accessories

- Recirculating kit DHZ1225

* In accordance with the EU-Regulation No 65/2014

Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
 - max. Normal use 400 m³/h
 - Intensive 615 m³/h
- Noise max. Normal Level: 59 dB*

Features

- TouchControl with Electronic display
- Electronic display
- 3 power levels & intensive setting
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- Automatic intensive revert (6mins)
- 1 metal grease filter cassette
- Designed for wall mounted installation


Design

- Chimney extractor hood
- TouchControl
- Electronic control

Performance/technical information


- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Max. extraction rate: 615 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
 - Max. normal use: 59 dB(A) re 1 pW
 - Intensive: 69 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
 - Extraction rate in recirculation mode: Max. normal use: 337 m³/h
 - Intensive: 441 m³/h
 - Noise level in recirculation mode: Max. normal use: 70 dB(A) re 1 pW
 - Intensive: 74 dB(A) re 1 pW
- Light Intensity: 276 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 617-947 x 600 x 488 mm
- Dimensions recirculating (HxWxD): 617-1057 x 600 x 488 mm
- Dimensions recirculating with CleanAir module (HxWxD):
 - 686 x 600 x 488 mm - mounting with outer chimney
 - 815-1145 x 600 x 488 mm - mounting with telescopic chimney
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*

**Series 4, Wall-mounted cooker hood,
60 cm, Clear glass
DWA66DM50B**

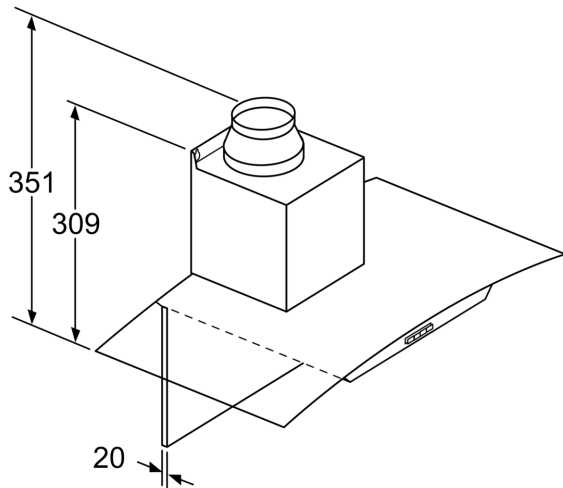


If a back panel is used,
the design of the appliance
must be considered.


measurements in mm

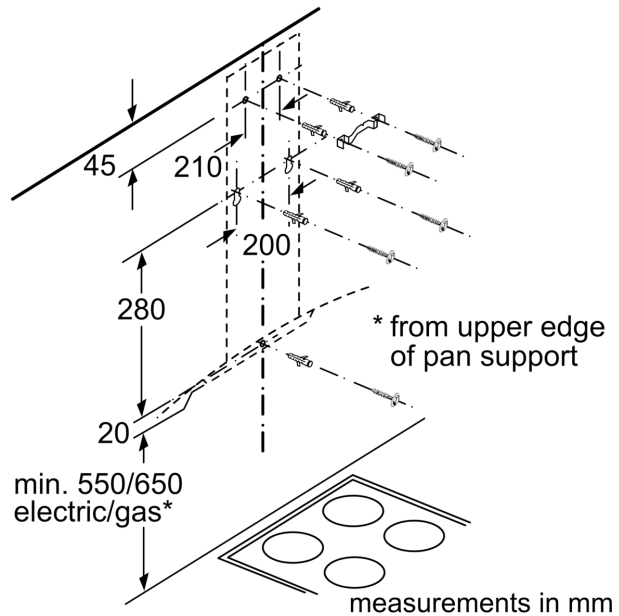

measurements in mm

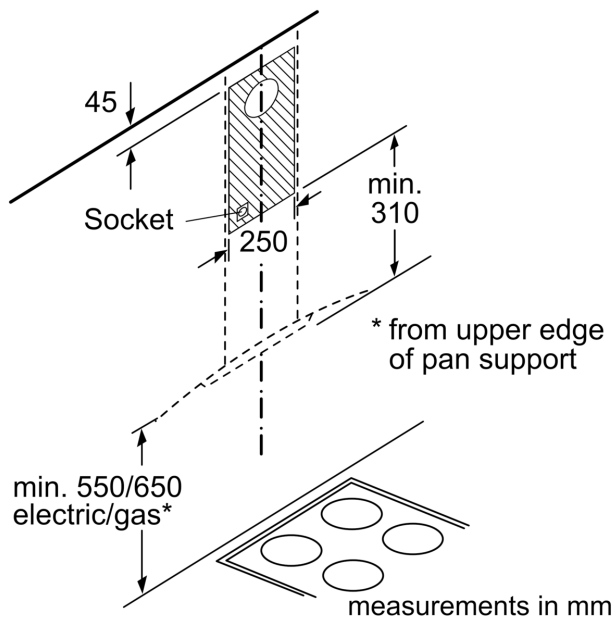


measurements in mm

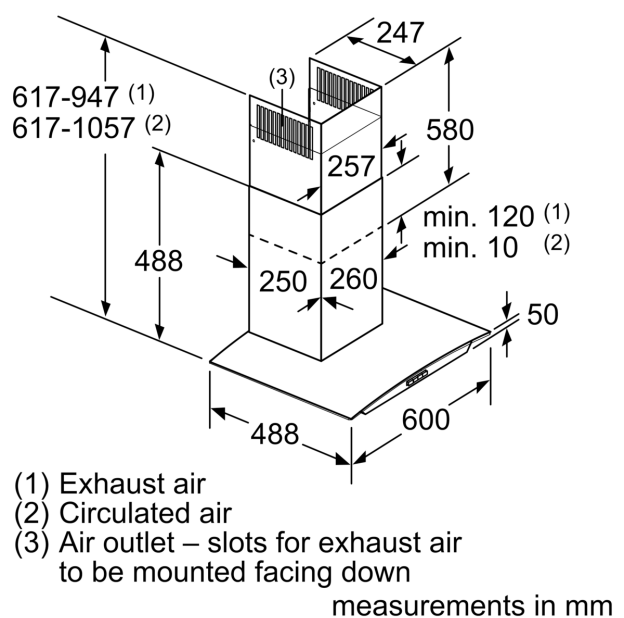

measurements in mm

- (1) Exhaust air
- (2) Circulated air
- (3) Air outlet – slots for exhaust air to be mounted facing down

measurements in mm

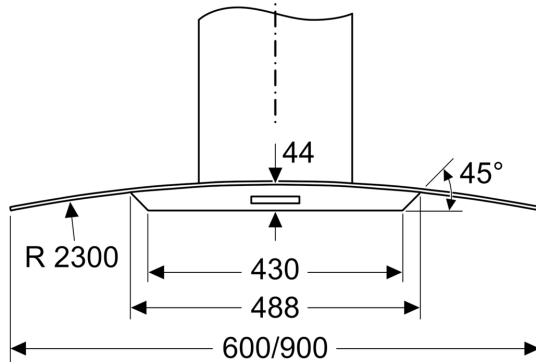

Dimensions for designing rear wall panels.
Please ensure that all dimensions are within
the tolerances. The actual dimensions must
be checked on the appliance in question.