

Series 2, Wall-mounted cooker hood, 90 cm, Clear glass, Stainless steel DWG94BC50B



Optional accessories

DHZ1225	Chimney extension 1000 mm
DWZ0XX0J0	Long Life recirculation kit
DWZ1DX1B4	Clean Air Standard odor filter (repl.)
DWZ1DX1I4	Clean Air Standard recirculation kit
DWZ1DX1I6	Clean Air Plus recirculation kit
DWZ1FX5C6	Clean Air Plus recirc. kit external
DZZ1XX1B6	Clean Air Plus odor filter (replacement)

Hood with glass design: performance combined with straight glass design matching your kitchen.

- **Quiet extraction with powerful performance**
- **LED Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **High extraction rate - for continuously clean air in the kitchen.**
- **Dishwasher safe metal grease filter**
- **3 Power Levels:** Adjust the extraction intensity according to your cooking needs.

Technical Data

Color chimney:	Stainless steel
Typology:	Wall-mounted
Length electrical supply cord:	130 cm
Height of the chimney:	576-906/576-998 mm
Height of the appliance:	59 mm
Minimum distance above an electric hob:	550 mm
Minimum distance above a gas hob:	650 mm
Net weight:	15.2 kg
Type of control:	mechanical
Number of speed settings:	3
Max. air extraction:	365 m³/h
Max. air recirculation:	240 m³/h
Maximum Air flow:	365 m³/h
Number of lights:	2
Noise level:	64 dB(A) re 1pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable aluminium
EAN code:	4242005051175
Connection rating:	100 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50; 60 Hz
Plug type:	GB plug
Installation typology:	Wall-mounted



Series 2, Wall-mounted cooker hood, 90 cm, Clear glass, Stainless steel DWG94BC50B

* In accordance with the EU-Regulation No 65/2014

**Hood with glass design: performance
combined with straight glass design
matching your kitchen.**

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 365 m³/h
- Noise max. Normal Level: 64 dB*

Features

- Push button control
- 3 power levels
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- 2 metal grease filter cassettes
- Installation Installation: wall

Design

- Chimney extractor hood
- Mechanical


Performance/technical information

- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Maximum extraction rate exhaust air 365 m³/h according to EN 61591
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 64 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
- Extraction rate in recirculation mode:
- Max. normal use: 240m³/h
- Noise level in recirculation mode:
- Max. normal use: 65 dB(A) re 1 pW
- Power rating: 100 W
- Light Intensity: 91 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 635-965 x 900 x 525 mm
- Dimensions recirculating (HxWxD): 635-1075 x 900 x 525 mm
- Dimensions recirculating with CleanAir module (HxWxD):
- 703 x 900 x 525mm - mounting with outer chimney
- 833-1163 x 900 x 525 mm - mounting with telescopic chimney
- Blower Efficiency Class: E*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 53.1 kWh/year*

Optional accessories


- Recirculating kit DHZ1225

**Series 2, Wall-mounted cooker hood,
90 cm, Clear glass, Stainless steel
DWG94BC50B**

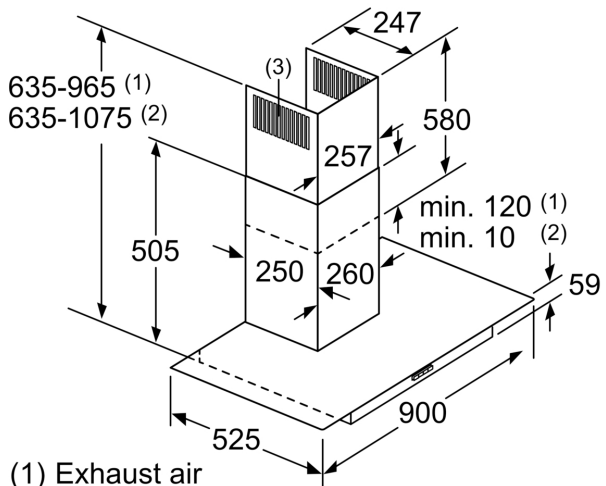


- (1) Exhaust air
- (2) Circulated air
- (3) Air outlet – slots for exhaust air to be mounted facing down

measurements in mm

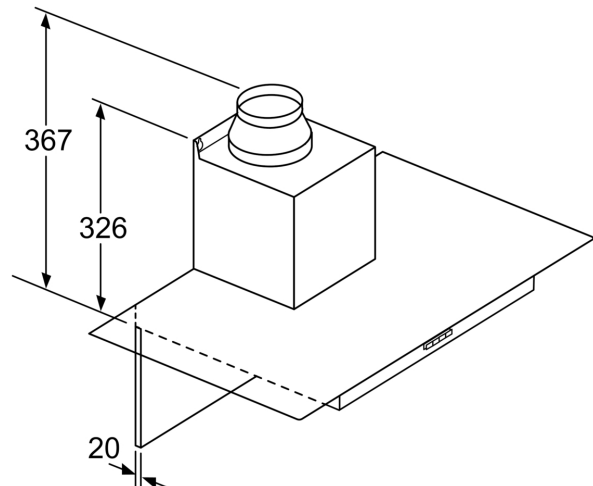

If a back panel is used,
the design of the appliance
must be considered.


measurements in mm

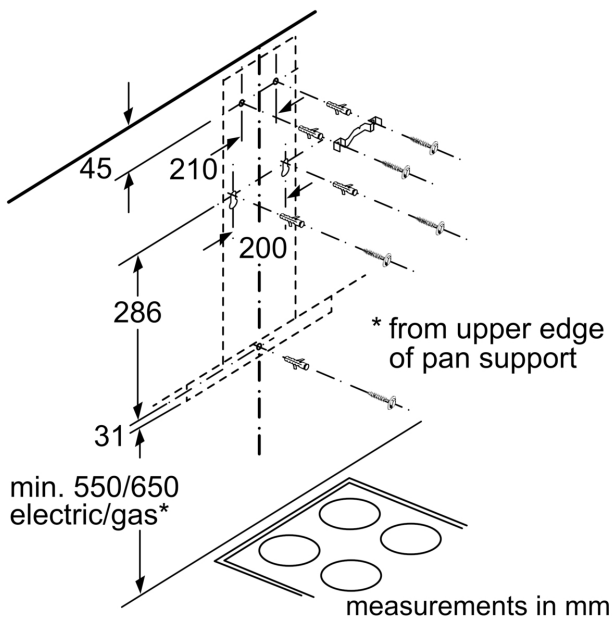

* from upper edge
of pan support

min. 550/650
electric/gas*

measurements in mm

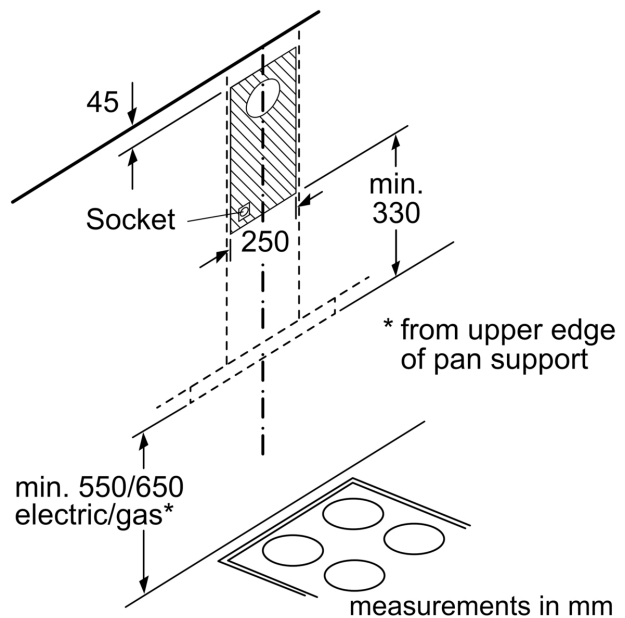

45

Socket

min.
330

* from upper edge
of pan support

min. 550/650
electric/gas*

measurements in mm