

Series 2, Wall-mounted cooker hood, 60 cm, Clear glass black printed DWK065G60B



DWA0LK6A carbon filter

C

Wall mounted chimney hoods add style and sophistication to the kitchen and give you complete freedom in your kitchen planning.

- **LED Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **3-speed power Level options to suit your cooking style and recipes.**
- **Ducted or Non-ducted Options**

Typology:Wall-mounted
 Length electrical supply cord: 130.0 cm
 Height of the appliance: 354 mm
 Minimum distance above an electric hob: 470 mm
 Minimum distance above a gas hob:570 mm
 Net weight:7.3 kg
 Type of control:Electronic
 Number of speed settings:3
 Max. air extraction: 593 m³/h
 Max. air recirculation: 250 m³/h
 Maximum Air flow:593 m³/h
 Number of lights:2
 Noise level:67 dB(A) re 1pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material:Washable aluminium
 EAN code:4242005174447
 Connection rating: 216 W
 Fuse protection:10 A
 Voltage: 220-240 V
 Frequency: 50 Hz
 Plug type: GB plug
 Installation typology:Wall-mounted



4 242005 174447

Series 2, Wall-mounted cooker hood, 60 cm, Clear glass black printed DWK065G60B

**Wall mounted chimney hoods add style
and sophistication to the kitchen and give
you complete freedom in your kitchen
planning.**

Key performance features:

- Energy Efficiency Class: C (at a range of energy efficiency classes from A+++ to D)
- Maximum extraction rate exhaust air 593 m³/h according to EN 61591
- Noise max. Normal Level: 67 dB*

Special features

- TouchControl with Electronic display
- 3 power levels
- 2 x LED lights
- Colour Temperature: 3000 K
- 1 metal grease filter cassette
- Filter cover glass, Removable metal grease filters
- Rim ventilation

Design

- Chimney extractor hood
- Designed for wall mounted installation
- TouchControl
- Electronic control

Performance/technical information



- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit (accessory) needed
- Extraction rate according to EN 61591 max. 593 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 67 dB(A) re 1 pW
- Power rating: 216 W
- Light Intensity: 377 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 750-1080 x 596 x 386 mm
- Dimensions recirculating (HxWxD): 862-1080 x 596 x 386 mm
- Blower Efficiency Class: D*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: D*
- Average Energy Consumption: 94.4 kWh/year*

Optional accessories

- Recirculating kit DWA0LK6A

* In accordance with the EU-Regulation No 65/2014

Series 2, Wall-mounted cooker hood, 60 cm, Clear glass black printed DWK065G60B

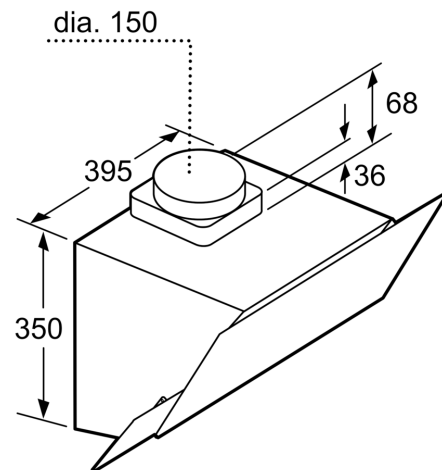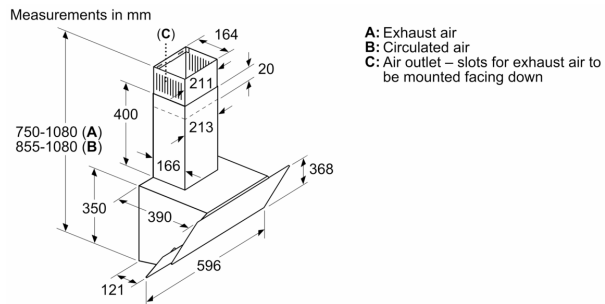

measurements in mm

