

Serie | 4, wall-mounted cooker hood,
80 cm, clear glass black printed
DWK87BM60B



Optional accessories

- DWZ0AK0R0 : Long Life recirculation kit (chimless)
- DWZ0AK0S0 : Long Life recirculation kit
- DWZ0AX5K0 : Chimney extension 1000 mm
- DWZ0AX5L0 : Chimney extension 1500 mm
- DWZ1AK1I6 : Clean Air Plus recirculation kit
- DWZ1AK1V6 : Clean Air Plus recirc. kit (chimless)
- DWZ1AX5C6 : Clean Air Plus recirc. kit external
- DWZ1AX6E1 : Chimney standard black
- DZZ0XX0P0 : Long Life odor filter (replacement)
- DZZ1XX1B6 : Clean Air Plus odor filter (replacement)



Angled hood: perfect for keeping an eye on
your pots and pans.

- **Especially silent:** maximum extractor performance with minimal noise
- **Easy-to-clean interior:** hidden screws and cables along with rounded edges make cleaning easy.
- **TouchSelect control:** quick touch-control selection of desired settings and light.
- **LED Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **Intensive speed setting:** removes strong kitchen odours quickly and effectively.

Technical Data

Typology :	Chimney
Approval certificates :	CE, VDE
Length electrical supply cord (cm) :	130
Height of product, without chimney (mm) :	323
Minimum distance above an electric hob :	450
Minimum distance above a gas hob :	600
Net weight (kg) :	23.403
Type of control :	Electronic
Maximum output air extraction (m3/h) :	409
Boost position output recirculating (m3/h) :	565.0
Maximum output recirculating air (m3/h) :	386
Boost position air extraction (m³/h) :	676
Number of lights :	2
Noise level (dB(A) re 1 pW) :	57
Diameter of air outlet (mm) :	150 / 120
Grease filter material :	Washable aluminium
EAN code :	4242005073931
Connection Rating (W) :	263
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	GB plug
Installation typology :	Wall-mounted



**Serie | 4, wall-mounted cooker hood, 80 cm,
clear glass black printed
DWK87BM60B**

**Angled hood: perfect for keeping an eye on
your pots and pans.**

Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 408 m³/h
Intensive 676 m³/h
- Noise max. Normal Level: 57 dB*

Features

- TouchControl with Electronic display
- Electronic display
- 3 power levels & intensive setting
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- Automatic intensive revert (6mins)
- 2 metal grease filter cassettes
- easy to clean Inner frame
- Designed for wall mounted installation
- Rim ventilation

Design

- Chimney extractor hood
- TouchControl
- Electronic control

Performance/technical information




- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Easy installation system
- Extraction rate according to EN 61591 max. 408 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 57 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 57 dB(A) re 1 pW
Intensive: 67 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 57 dB (A) re 1pW
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 898-1168 x 790 x 467 mm
- Dimensions recirculating (HxWxD): 958-1228 x 790 x 467 mm
- Dimensions recirculating with CleanAir module (HxWxD):
1088 x 790 x 467 mm - mounting with outer chimney
1158-1428 x 790 x 467 mm - mounting with telescopic chimney
- Blower Efficiency Class: B*
- Lighting Efficiency Class: B*
- Grease Filtering Efficiency Class: D*
- Average Energy Consumption: 56.4 kWh/year*

Optional accessories

- Recirculating kit DWZ0AK0R0


** In accordance with the EU-Regulation No 65/2014*

**Serie | 4, wall-mounted cooker hood, 80 cm,
clear glass black printed
DWK87BM60B**

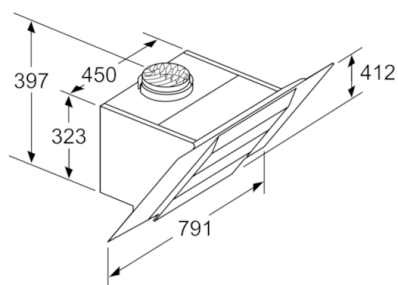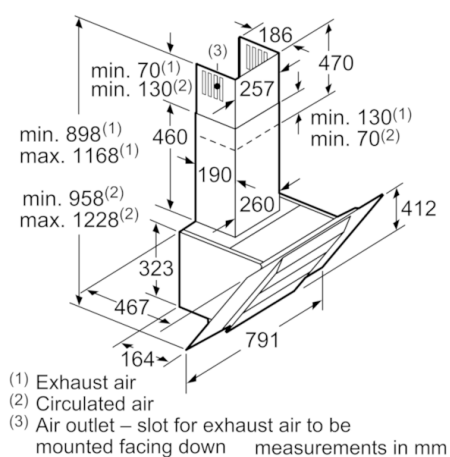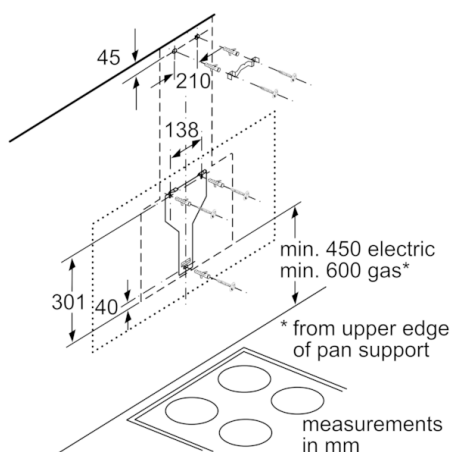


Appliance in circulated air mode
without duct
Circulated air set required

measurements in mm

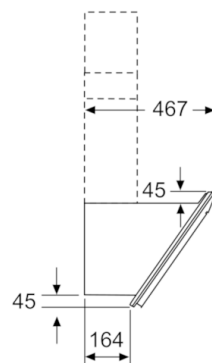

measurements in mm

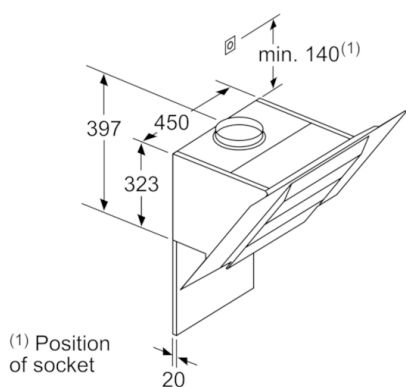

(1) Position
of socket

Note the maximum thickness of the back panel.

measurements in mm

