

**Series 6, Wall-mounted cooker hood,
90 cm, Clear glass black printed
DWK97JQ60B**



**Angled hood: perfect for keeping an eye
on your pots and pans.**

- **PerfectAir sensor:** automatic extractor control for high performance with low noise.
- **DirectSelect control:** direct selection of desired settings and light.
- **Extra silent:** the high-performance hood, with minimal noise.
- **Easy-to-clean interior:** hidden screws and cables along with rounded edges make cleaning easy.

Technical Data

Typology:	Wall-mounted
Length electrical supply cord:	130.0 cm
Height of the appliance:	323 mm
Minimum distance above an electric hob:	450 mm
Minimum distance above a gas hob:	650 mm
Net weight:	23.2 kg
Type of control:	Electronic
Number of speed settings:	3-stage + 2 intensive
Max. air extraction:	431 m ³ /h
Boost position output recirculating:	441 m ³ /h
Max. air recirculation:	355 m ³ /h
Boost position air extraction:	714 m ³ /h
Maximum Air flow:	431 m ³ /h
Number of lights:	2
Noise level:	53 dB(A) re 1 pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable aluminium
EAN code:	4242002946849
Connection rating:	143 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50; 60 Hz
Plug type:	GB plug
Installation typology:	Wall-mounted
Delay Shut off modes:	10 min

Optional accessories

DWZOAX5L0	Chimney extension 1500 mm
DWZ1AK1B6	Clean Air Plus odor filter (replacement)
DWZ1AK1I6	Clean Air Plus recirculation kit
DWZ1AK1V6	Clean Air Plus recirc. kit (chimless)
DWZ1AX5C6	Clean Air Plus recirc. kit external
DWZ1AX6E1	Chimney standard black
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)
DWZOAK0R0	Long Life recirculation kit (chimless)
DWZOAK0S0	Long Life recirculation kit
DWZOAX5K0	Chimney extension 1000 mm



Series 6, Wall-mounted cooker hood, 90 cm, Clear glass black printed DWK97JQ60B

**Angled hood: perfect for keeping an eye
on your pots and pans.**

Key performance features:

- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
 - max. Normal use 431 m³/h
 - Intensive 714 m³/h
- Noise max. Normal Level: 53 dB*

Features

- PerfectAir sensor
- TouchControl with lightline
- 3 power levels and 2 intensive settings
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- Dimmer function
- Efficient BLDC technology
- Automatic after running (10 min)
- Automatic intensive revert (6mins)
- 2 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- easy to clean Inner frame
- Designed for wall mounted installation
- Rim ventilation

Design

- Chimney extractor hood
- TouchControl
- Electronic control

Performance/technical information

- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Installation system: Wall fixing inclined/flat/cube
- Extraction rate according to EN 61591 max. 431 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 53 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
 - Max. normal use: 53 dB(A) re 1 pW
 - Intensive: 65 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 53 dB (A) re 1 pW
- Light Intensity: 238 lux
- Electrical cable length 1.3 m
- Diameter pipe ø 150 mm (ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 928-1198 x 890 x 499 mm
- Dimensions recirculating (HxWxD): 988-1258 x 890 x 499 mm
- Dimensions recirculating with CleanAir module (HxWxD):
 - 1118 x 890 x 499 mm - mounting with outer chimney
 - 1188-1458 x 890 x 499 mm - mounting with telescopic chimney



- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 34.6 kWh/year*

Optional accessories

- Recirculating kit DWZOAX5L0



* In accordance with the EU-Regulation No 65/2014


**Series 6, Wall-mounted cooker hood,
90 cm, Clear glass black printed
DWK97JQ60B**

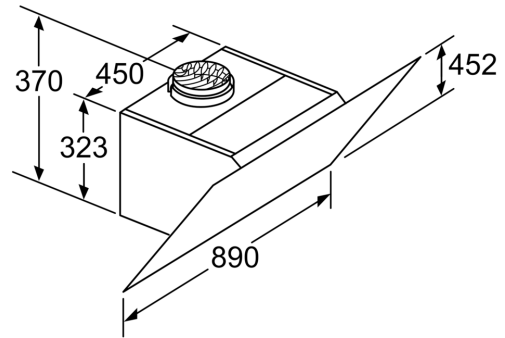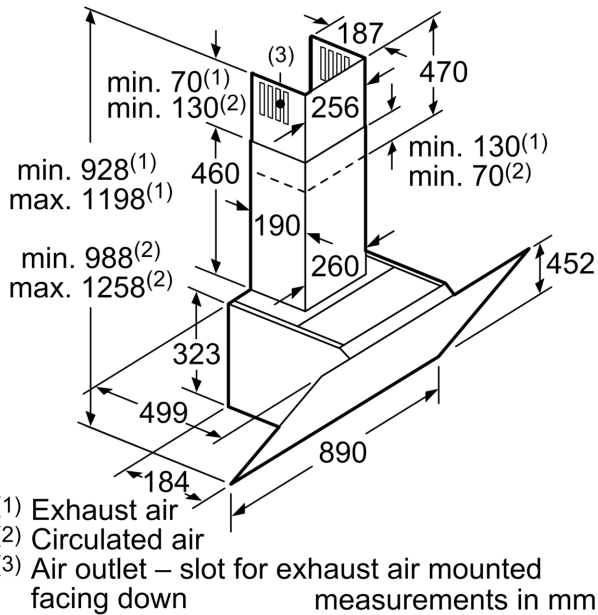

Appliance in circulated air mode
without duct
Circulated air set required


measurements in mm

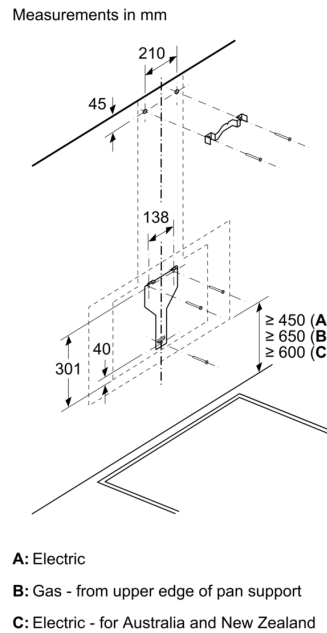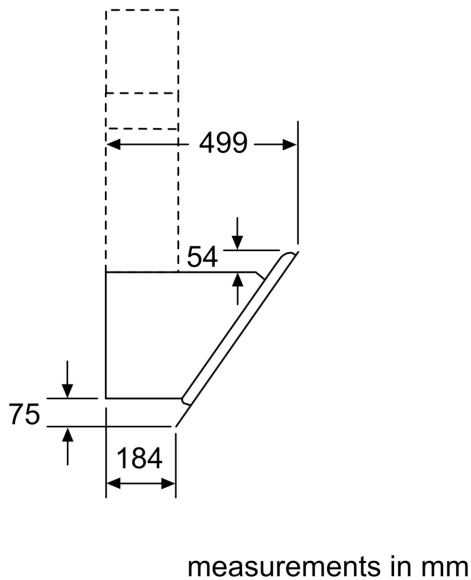

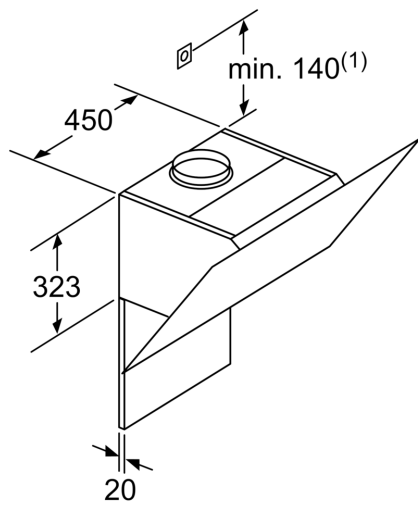

(1) Position of socket

Note the maximum thickness of the back panel.
measurements in mm

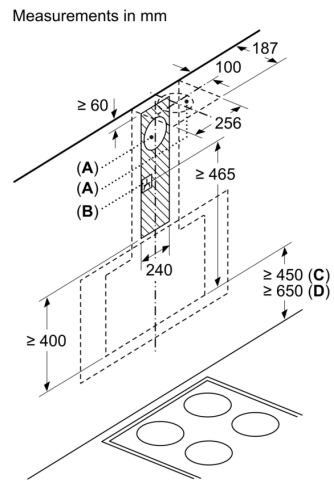

A: Exhaust air
B: Socket

From upper edge of pan support

C: Electric
D: Gas