Series 2, Wall-mounted cooker hood, 60 cm, Stainless steel
DWP64CC50M





Wall mounted chimney hoods add style and sophistication to the kitchen and give you complete freedom in your kitchen planning.

- **Quiet extraction with powerful performance**
- **High extraction rate - for continuously clean air in the kitchen.**
- **Dishwasher safe metal grease filter**
- **3 Power Levels**: Adjust the extraction intensity according to your cooking needs.
- **Dishwasher safe aluminum mesh filters**

Technical Data

Color chimney:	Stainless steel
Typology:	Wall-mounted
Length electrical supply cord:	120 cm
Required niche size for installation (HxWxD):	GENERAL.N_A mm
Height of the chimney:	410-765/410-765 mm
Height of the appliance:	250 mm
Minimum distance above an electric hob:	650 mm
Minimum distance above a gas hob:	650 mm
Net weight:	9.2 kg
Type of control:	mechanical
Number of speed settings:	3
Max. air extraction:	380 m^3/h
Max. air recirculation:	235 m^3/h
Maximum Air flow:	380 m^3/h
Number of lights:	2
Noise level:	64 dB(A) re 1 pW
Diameter of air outlet:	150 mm
Grease filter material:	Washable aluminium
EAN code:	4242002985299
Connection rating:	135 W
Fuse protection:	GENERAL.N_A A
Voltage:	220-240 V
Frequency:	50 Hz
Plug type:	GB plug
Installation typology:	Wall-mounted

Optional accessories

DWZ6HP1U2 Standard recirculation kit

4 242002 985299

Series 2, Wall-mounted cooker hood, 60 cm, Stainless steel
DWP64CC50M

Wall mounted chimney hoods add style and sophistication to the kitchen and give you complete freedom in your kitchen planning.

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 380 m3/h
- Noise max. Normal Level: 64 dB*

Features

- 3 power levels
- 2 x LED 5W
- Colour Temperature: 4000 K
- 2 metal grease filter cassettes
- Installation Installation: wall

Design

- Chimney extractor hood
- Push button control
- Mechanical

Performance/technical information


- Suitable for ducted or recirculating operation
- For recirculated extraction charcoal filter (accessory) needed
- Maximum extraction rate exhaust air 380 m^3/h according to EN 61591
- Extraction rate in recirculation mode:
- Max. normal use: 235 m^3/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 64 dB(A) re 1 pW
- Noise level in recirculation mode:
- Max. normal use: 70 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Power rating: 135 W
- Light Intensity: 1000 lux
- Electrical cable length 1.2 m
- Diameter pipe Ø 150 mm (Ø 150 mm enclosed)
- Dimensions exhaust air (HxWxD): 790-1015 x 598 x 470 mm
- Dimensions recirculating (HxWxD): 790-1015 x 598 x 470 mm
- Blower Efficiency Class: E*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 72.8 kWh/year*


Optional accessories


- Recirculating kit DWA0KP6A

* In accordance with the EU-Regulation No 65/2014

Series 2, Wall-mounted cooker hood, 60 cm, Stainless steel
DWP64CC50M

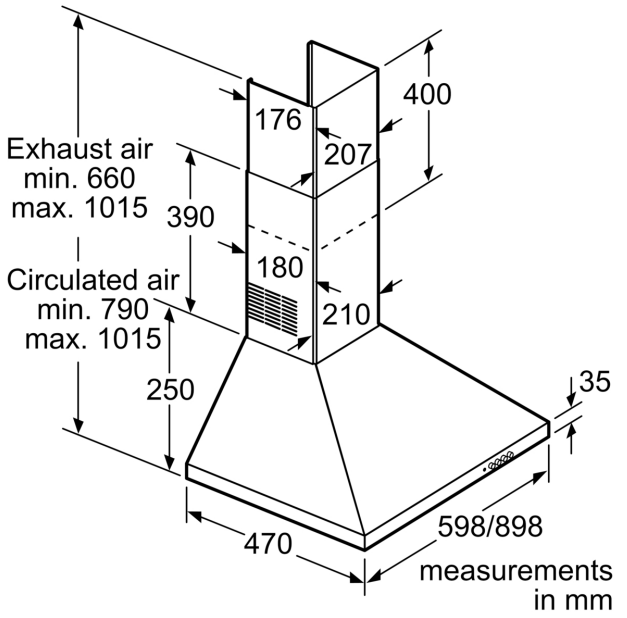

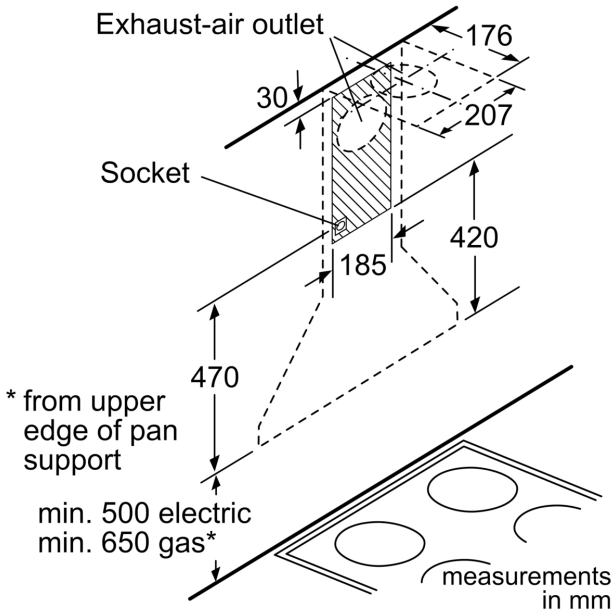

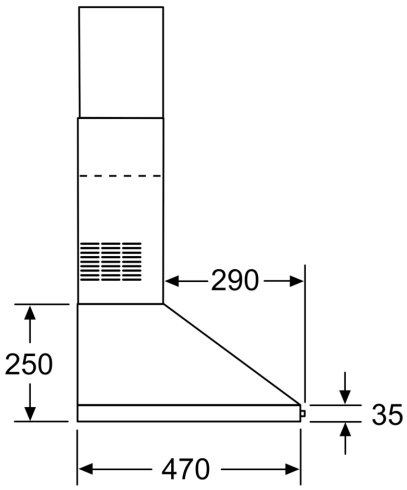

measurements in mm