

Series 4, free-standing fridge-freezer with freezer at bottom, 186 x 60 cm, Stainless steel look KGN36VLEAG



Included accessories

3 x egg tray
1 x ice cube tray

NoFrost bottomfreezer: no need to defrost your freezer

- **VitaFresh:** keeps food fresh for longer in climate controlled drawers at near 0°C.
- LED lighting - with soft start, lasts for the lifetime of the appliance.
- **Automatic super freezing:** optimal for freezing smaller food loads faster whilst protecting your frozen items from defrosting
- **EasyAccess Shelf:** pull-out glass shelf gives you better access to the contents of your fridge.
- **2 cooling circuits:** separately controllable refrigerator and freezer compartments - prevents odour transfer.

Technical Data

Energy Efficiency Class: E
 Average annual energy consumption in kilowatt hour per year (kWh/a): 238 kWh/annum
 Sum of volume of frozen compartments: 89 l
 Sum of volume of chill compartments: 237 l
 Airborne acoustical noise emissions : 39 dB(A) re 1 pW
 Airborne acoustical noise emission class: C
 Built-in / Free-standing: Free-standing
 Door panel options: Not possible
 Height: 1860 mm
 Width of the appliance: 600 mm
 Depth: 660 mm
 Net weight: 74.9 kg
 Connection Rating: 100 W
 Fuse protection: 10 A
 Door hinge: Right reversible
 Frequency: 50-60 Hz
 Length electrical supply cord: 240 cm
 Number of compressors: 1
 Number of independent cooling systems: 2
 Interior ventilator: No
 Reversible Door Hinge: Yes
 Number of Adjustable Shelves in fridge compartment: 2
 Shelves for Bottles: Yes
 Installation typology: N/A



Series 4, free-standing fridge-freezer with freezer at bottom, 186 x 60 cm, Stainless steel look KGN36VLEAG

NoFrost bottomfreezer: no need to defrost your freezer

- KGN36VLEAG
- No Frost, Fridge freezer
- Cambered Door, High-door design Stainless steel look

Design features

- Stainless steel look doors and Pearl grey (VZF 07127) side panels
- Integrated vertical handle Integrated vertical handle
- Right hinged door, reversible door
- Separate, electronic temperature control with LED display

Food freshness system

- Two separate cooling circuits allow independent temperature control and prevents the transference of humidity between the fridge and freezer cavity

Key features - Fridge section

- 1 VitaFresh drawer with humidity control - Fruits and vegetables retain vitamins and stay fresh for longer
- ChillerBox - recommended storage area for meat and fish MultiAirflow system - improves circulation of air around the fridge
- Bright interior LED fridge light
- 4 safety glass shelves (2 height adjustable)
- Door shelves in fridge door: 1 large and 2 small
- SuperCool function
- Bottle rack

Key features - Freezer section

- No Frost, never have to defrost ever again
- 3 freezer drawers
- SuperFreeze functions with automatic deactivation
- Calendar frozen food
- Freezer malfunction warning signal: optical and acoustical warning system

Additional features

- Optical and acoustic door open alarm
- 3 x egg tray, 1 x ice cube tray

Dimension and installation

- Connection value 100 W
- 220 - 240 V
- Height adjustable front feet
- Dimensions: 186 cm H x 60 cm W x 66 cm D
- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.
- To achieve the declared energy consumption, the distanceholders have to be used. As a result, the appliance depth increases by about 3.5 cm. The appliance used without the distance holder is fully functional, but has a slightly higher energy consumption.



Functions

Performance and Consumption

- EU19_EEK_D: E
- Total Volume : 326 l
- Net Fridge Volume : 237 l
- Net Freezer Volume : 89 l
- Freezing capacity 24h : 10 kg
- Annual Energy Consumption: 238 kWh/a
- Climate Class: SN-T
- EU19_Fast freezer facility_D: yes
- Noise Level : 39 dB
- Temperature rise time : EU19_Temperature rise time_D: 13 H

**Series 4, free-standing fridge-freezer with freezer at bottom, 186 x 60 cm, Stainless steel look
KGN36VLEAG**

| Appliance name | a | b | c | d | e | f | g |
|----------------------|------|-----|-----|-----|-----|------|-----|
| KGN36 (Inner handle) | 1860 | 600 | 660 | 590 | 600 | 1210 | 660 |
| KGN36 (Outer handle) | 1860 | 600 | 660 | 590 | 640 | 1210 | 700 |

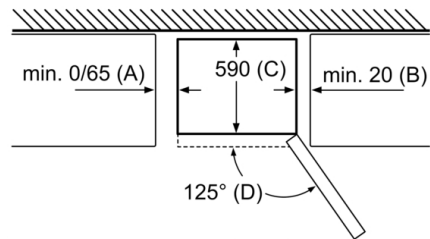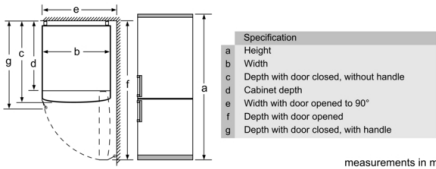

| Appliance name | A | B | C | D |
|-----------------------|------|----|-----|-----|
| KGN33, 36, 39, 46, 49 | 0/65 | 20 | 590 | 125 |
| KGF39, 49 | 0/65 | 20 | 590 | 125 |

Dimension A:
In models with vertical integrated handles, in order to open easily, a minimum distance of 65 mm is needed.

measurements in mm