

Series 2, Built-under double oven NBS113BR0B



2 x combination grid, 1 x universal pan, 2 x universal pan, slim size

HEZ327000 Pizza stone, HEZ32WA00 Wireless food thermometer, HEZ530000 Half tray, HEZ531010 Baking tray, non-stick ceramic coated, HEZ532010 Universal pan, non-stick ceramic coated, HEZ538000 1fold telescopic rail, level independent, HEZ617000 Pizza pan, enamelled, HEZ629070 Air Fry & Grill tray, HEZ631070 Baking tray, enamelled, HEZ632070 Multipurpose pan, enamelled, HEZ634000 Baking and roasting grid, HEZ636000 Glass pan, HEZ638000 Full ext rails, level independent, HEZ664000 Baking and roasting grid, steam, HEZ915003 Glass roasting dish, 5,4 L

The built-in double compact oven with 3D hot air: achieve perfect baking and roasting results on multiple levels simultaneously.

- **3D Hotair:** even heat distribution for perfect results on up to three levels.
- **Red LED display control:** easy-to-use thanks to the time functions.
- **2 universal pans, slim size:** optimized for smaller amounts of different dishes.

Built-in / Free-standing: Built-in
Integrated Cleaning system: No
Dimensions: 717x594x550 mm
Dimensions of the packed product (HxWxD): 790 x 660 x 700 mm
Control Panel Material: Stainless steel
Door Material: Glass
Net weight: 47.1 kg
Usable volume (of cavity) - cavity 1: 47 l
Cooking method: Full width grill, Hotair gentle, Hot Air, Conventional heat
Oven control: mechanical
EAN code: 4242005034604
Energy efficiency rating: A
Energy consumption per cycle conventional (2010/30/EC): 0.84 kWh/cycle
Energy consumption per cycle forced air convection (2010/30/EC): 71 kWh/cycle
Energy efficiency class (2010/30/EC) - cavity 2: B
Energy consumption per cycle conventional - cavity 2 (2010/30/EC): 83 kWh/cycle
Energy efficiency index (2010/30/EC): 94.7 %
Energy efficiency index cavity 2 (2010/30/EC): 120.3 %
Connection rating: 5300 W
Fuse protection: 25 A
Voltage: 220-240 V
Frequency: 50 Hz
Plug type: no plug (electrical connection by electrician), fixed connection (electrical connection by electrician)
Included accessories: 2 x combination grid, 1 x universal pan, 2 x universal pan, slim size



Series 2, Built-under double oven NBS113BR0B

- Niche dimension (hxwx): 720 mm - 720 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

The built-in double compact oven with 3D hot air: achieve perfect baking and roasting results on multiple levels simultaneously.

Design

- LED-Display Control (Red)
- Interior halogen light
- Rotary dial, round
- Straight bar handle

Features

- Automatic start
- Heating-up indicator
- Control panel lock
- Electronic clock timer

Top oven additional features

- Cavity volume: 34 litre capacity
- 3 shelf positions
- Cavity (inner surface) top: Enamel grey
- Door hinge small cavity: bottom
- Full glass inner door

Main oven additional features

- Cavity volume: 47 litre capacity
- Door hinge big cavity: Drop down door
- Full glass inner door

Top oven

- Oven with 3 heating methods: conventional top/bottom heat, Large-area grill, Small area grill
- Temperature range 50 °C - 275 °C

Main oven

- Oven with 4 heating methods: 3D Hotair, conventional top and bottom heat, full width variable grill, Hotair gentle
- Temperature range 50 °C - 275 °C
- Fast pre-heating function


Accessories

- 2 x combination grid, 1 x universal pan, 2 x universal pan, slim size

Performance/technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): B(at a range of energy efficiency classes from A+++ to D)
- Energy consumption per cycle in conventional mode:0.83 kwh
- Number of cavities: Top Cavity Heat source: electrical
- Energy efficiency rating (acc. EU Nr. 65/2014): B(at a range of energy efficiency classes from A+++ to D)
- Energy consumption per cycle in conventional mode:0.83 kWh
- Energy consumption per cycle in fan-forced convection mode:0.71 kwh
- Number of cavities: Main Cavity Heat source: electrical
- Total connected load electric: 5.3 KW
- Nominal voltage: 220 - 240 V
- Appliance dimension (hxwx): 717 mm x 594 mm x 550 mm

Series 2, Built-under double oven NBS113BR0B

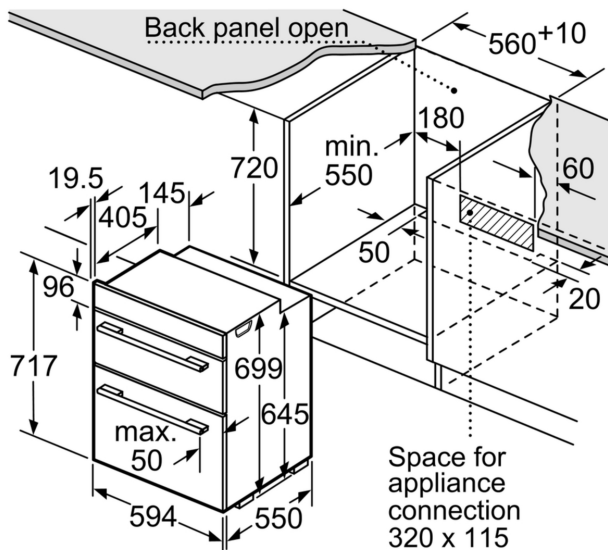


measurements in mm

measurements in mm

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	39	40
Full-surface induction hob	49	50
Gas hob	29	40
Electric hob	29	32

measurements in mm
Installation with a hob



A: Recessed depth 29-50 mm.
See hob dimensional drawing.
B: Min. distance:
Induction hob: 5 mm
Gas hob: 5 mm
Electric hob: 2 mm

measurements in mm

