


Series 6, Gas hob, 75 cm, Stainless steel PCS7A5B90

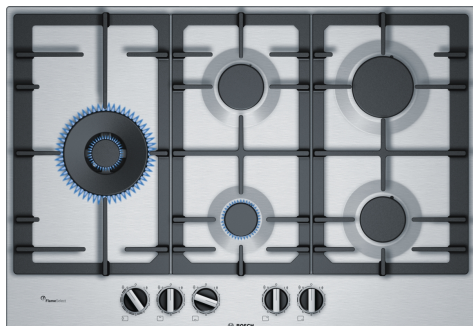

HEZ211310	Simmer cap
HEZ298105	Simmer plate
HEZ298107	Wok ring
HEZ298115	Small pot support

The stainless-steel gas hob with FlameSelect: achieve perfect cooking results thanks to nine precisely defined power levels.

- **Dual Control Wok** enables you to precisely control flame level by two
- **different flame rings** on the same burner.
- **Five powerful high-efficiency gas burners** allows you to cook multiple dishes with a full range BTU performance.

Product name/family:gas hob w integrated controls
 Built-in / Free-standing: Built-in
 Energy input:Gas
 Number of cooking zones:5
 Type of control setting devices: sword knobs
 Required niche size for installation (HxWxD): 45 x 560-562 x 480-492 mm
 Width of the appliance: 750 mm
 Dimensions: 53x750x520 mm
 Dimensions of the packed product (HxWxD): 145 x 793 x 597 mm
 Net weight: 13.9 kg
 Gross weight: 15.6 kg
 Residual heat indicator: without
 Location of control panel: Front
 Basic surface material: Stainless steel
 Color of surface: Stainless steel
 Length electrical supply cord: 100.0 cm
 EAN code: 4242002837505
 Gas connection rating: 12500 W
 Fuse protection:3 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz



4 242002 837505

Series 6, Gas hob, 75 cm, Stainless steel PCS7A5B90

The stainless-steel gas hob with FlameSelect: achieve perfect cooking results thanks to nine precisely defined power levels.

Design

- Stainless steel surface
- Cast iron pan supports

Usage convenience

- FlameSelect: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 gas burners
- Including 1 dual control wok burner: use an extra wide power range, separately controlling two flame rings.
- Left: WOK burner up to 5 KW (depending on gas type)
- Center front: Economy burner up to 1 KW (depending on gas type)
- Center rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: High-speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Pre-set for natural gas
- Nozzle set for LPG jets included. Connection to 28-30/37 mbar bottled gas. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 750 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 12.5 KW

Series 6, Gas hob, 75 cm, Stainless steel
PCS7A5B90

