


Series 4, induction hob, 60 cm PWP631BF1B

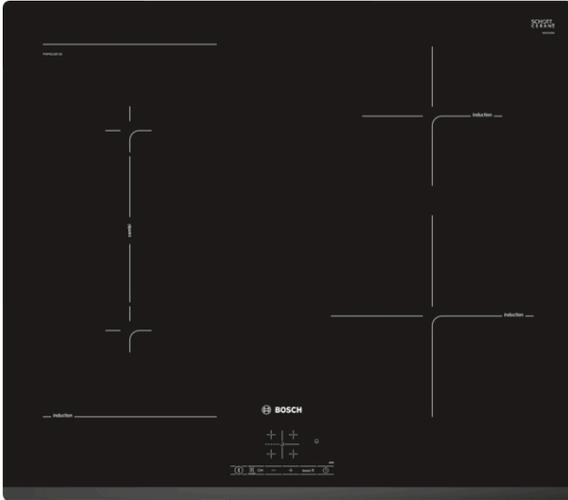

- **Plug & Play:** plugs easily into the socket.
- **TouchSelect:** Selection of the desired cooking zone and easy setting of the desired power level.
- **CombiZone:** More flexibility by combining two cooking zones, for roasters and the like.
- **Front-Bevel:** Elegant, appealing design with bevelled front.
- **PowerBoost:** up to 50% more power for faster heating on your induction hob.

Technical Data

Product name/family : Cooking zone ceramic
Construction type : Built-in
Energy input : Electric
Total number of positions that can be used at the same time : 4
Min. required niche size for installation (HxWxD) : 51 x 560-560 x 490-500 mm
Width of the appliance : 592 mm
Dimensions : 51 x 592 x 522 mm
Dimensions of the packed product (HxWxD) : 126 x 753 x 603 mm
Net weight : 10.1 kg
Gross weight : 12.3 kg
Residual heat indicator : Separate
Location of control panel : Hob front
Basic surface material : Ceramic
Color of surface : Black
Length electrical supply cord : 110 cm
EAN code : 4242002870908
Voltage : 220-240 V
Frequency : 50; 60 Hz




4 242002 870908

Series 4, induction hob, 60 cm PWP631BF1B


- This hob is equipped with a UK 3 pin plug for an easy plug & play installation. The plug limits the maximum power output to 3.7 KW. For higher power output, please select a hob without plug and ensure installation is carried out by a qualified electrician.

Series 4, induction hob, 60 cm PWP631BF1B

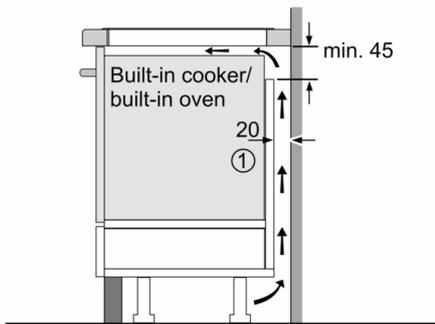


①
Ventilation gap must
be present


All measurements in mm

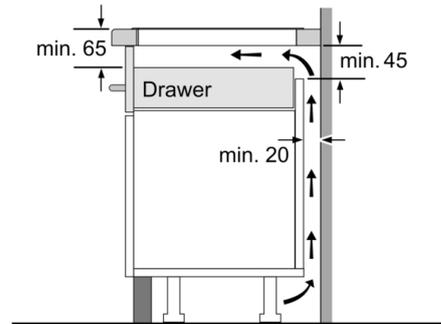

Measurements in mm

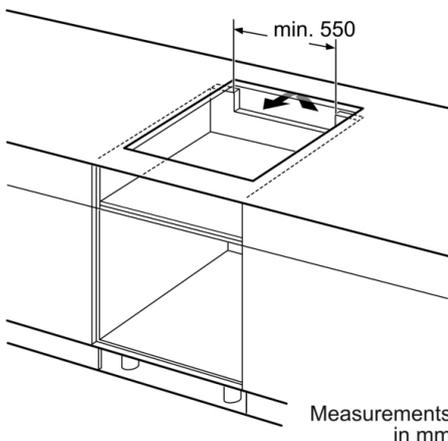

Measurements
in mm




measurements in mm

A: Minimum distance from the hob cut-out to the wall.
B: Recessed depth.
C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

| D | E | F |
|---------|------|------|
| 585-600 | 50 | ≥ 35 |
| > 600 | ≥ 50 | ≥ 50 |

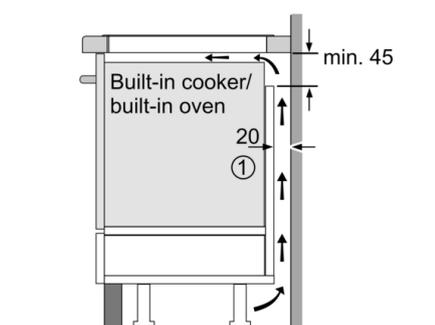

①
Ventilation gap must
be present

All measurements in mm