


Series 4, Flex induction hob, 60 cm, Black, surface mount with frame PXE675BB1E

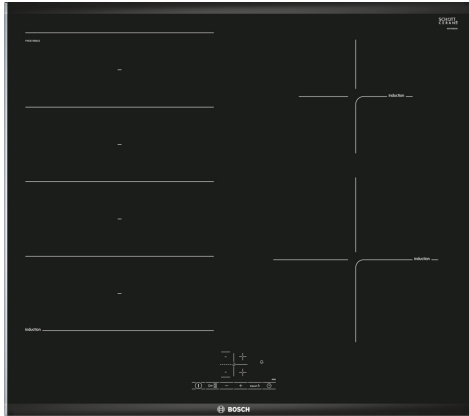

Optional accessories

HEZ390011	Stainless Steel roaster with glas lid
HEZ390012	Steaming Rack for Stainless Steel roaste
HEZ390090	Wok Set consisting of 3 Items
HEZ390210	System pan diameter 15 cm
HEZ390220	System pan diameter 19 cm
HEZ390230	System pan diameter 21cm
HEZ390512	Teppan Yaki (large)
HEZ390522	Griddle Plate
HEZ9SE030	Set of 2 pots and 1 pan

The FlexInduction hob allows you to place multiple pots and pans or large cookware anywhere on the flexible cooking zone.

- **TouchSelect:** Selection of the desired cooking zone and easy setting of the desired power level.
- **FlexInduction Zone:** Get more flexibility by combining the cooking zones into one big zone for placing small pots and large cookware.
- **PowerBoost:** Up to 50% more power for faster heating.
- **The handy ChildLock locks the control panel to prevent accidental changes in settings.**
- **Induction:** Fast, precise cooking, easy cleaning and low energy consumption.

Technical Data

Product name/family: Cooking zone ceramic
 Built-in / Free-standing: Built-in
 Energy input: Electric
 Number of cooking zones: 4
 Required niche size for installation (HxWxD): 51 x 560-560 x 490-500 mm
 Width of the appliance: 606 mm
 Dimensions: 51x606x527 mm
 Dimensions of the packed product (HxWxD): 126 x 753 x 603 mm
 Net weight: 13.4 kg
 Gross weight: 13.9 kg
 Residual heat indicator: Separate
 Location of control panel: Front
 Basic surface material: Ceramic glass
 Color of surface: Black, Alu, brushed
 Length electrical supply cord: 110.0 cm
 EAN code: 4242005097296
 Voltage: 220-240 V
 Frequency: 50; 60 Hz



**Series 4, Flex induction hob, 60 cm,
Black, surface mount with frame
PXE675BB1E**

**The FlexInduction hob allows you to place
multiple pots and pans or large cookware
anywhere on the flexible cooking zone.**

Special features

- flexInduction zone
- 4 induction cooking zones
- TouchControl
- Variable 17-stage power settings for each zone
- Digital display, red
- Automatic pan recognition sensor Safety cut-out switch-off Control panel lock
- Timer for all zones Timer - shows how long the cooktop is in use
- HighSpeed ceramic glass
- PowerBoost function for all zones
- QuickStart function
- ReStart function


Safety Features

- 2 stage residual heat indicator for each zone
- Main on/off switch

Power and size:


- Cooking zones: 1 x Ø 380 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 190 mm, 2.2 KW (max. Powerlevels 3.7 KW) Induction; 1 x Ø 145 mm, 1.4 KW (max. Power levels 2.2 KW) Induction; 1 x Ø 210 mm, 2.2 KW (max. Power levels 3.7 KW) Induction
- Connected load: 7.4 KW
- Installation dimensions: (ID/W/D) 51 mm x 560 mm x 490 mm
- Appliance dimensions: (W/D) 606 mm x 527 mm
- Min. worktop thickness: 20 mm
- Cable included

**Series 4, Flex induction hob, 60 cm,
Black, surface mount with frame
PXE675BB1E**

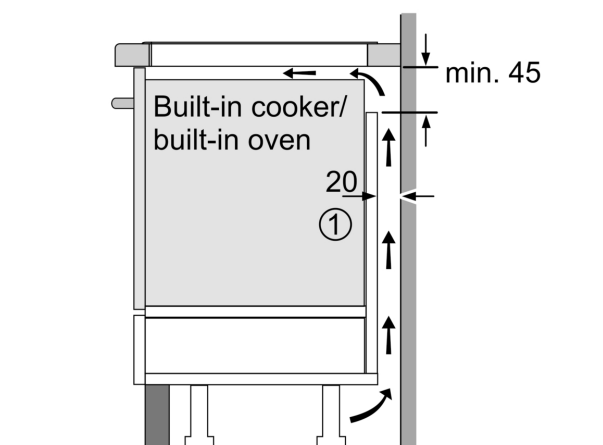

①
Ventilation gap must
be present

All measurements in mm

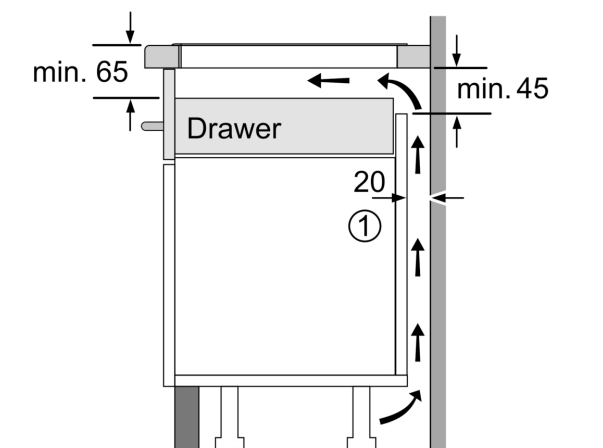

①
Ventilation gap must
be present.

Measurements in mm

