

Serie | 4, free-standing dishwasher, 60 cm, Stainless steel, lacquered SMS46II01G



- **ExtraDry:** extra drying option for difficult-to-dry loads.
- **Glass 40°C:** gentle cleaning for your delicate glassware.
- **VarioFlex baskets:** easily adjustable to create more space for your dishes.
- **Rackmatic:** even more adjustment options and thus maximum flexibility.
- **LED Display:** indicates remaining program time and salt and rinse aid refill reminders.

Technical Data

Energy Efficiency Class: E
 Energy Consumption for 100 cycles Eco Programme: 94 kWh
 Maximum number of place settings: 13
 The water consumption of the eco programme in liters per cycle: 9.5 l
 Programme duration: 3:45 h
 Airborne acoustical noise emissions : 46 dB(A) re 1 pW
 Airborne acoustical noise emission class: C
 Built-in / Free-standing: Free-standing
 Height of removable worktop: 30 mm
 Dimensions of the product (HxWxD): 845 x 600 x 600 mm
 Approval certificates: CE, VDE
 Depth with open door 90 degree: 1155 mm
 Adjustable feet: Yes - all
 Maximum adjustability feet: 20 mm
 Net weight: 47.2 kg
 Gross weight: 49.5 kg
 Connection Rating: 2400 W
 Fuse protection: 10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Length electrical supply cord: 175 cm
 Plug type: GB plug
 Length inlet hose: 150 cm
 Length outlet hose: 190 cm
 EAN code: 4242005123568
 Installation typology: Built-under



Serie | 4, free-standing dishwasher, 60 cm, Stainless steel, lacquered SMS46II01G

Performance

- Energy Efficiency Class¹: E
- Energy² / Water³: 94 kWh / 9.5 litres
- Capacity: 13 place settings
- Programme duration⁴: 3:45 (h:min)
- Noise level: 46 dB(A) re 1 pW
- Noise Efficiency Class: C

Programmes/functions

- 6 programmes: Intensive 70 °C, Auto 45-65 °C, Eco 50 °C, Glass, Quick, Pre rinse
- 3 special options: VarioSpeedPlus, HygienePlus, Extra Dry
- Special program 1: Machine Care

Flexible design elements

- VarioFlex baskets
- 3 stage Rackmatic height-adjustable top basket
- 2 foldable plate racks in top basket
- 4 foldable plate racks in bottom basket

Innovations and technology

- Heat exchanger.
- DosageAssist detergent dispenser
- EcoSilence BLDC drive
- Automatic detergent detection
- AquaSensor III, Load Sensor

Design features

- Time delay (3, 6 or 24 hours)
- Leak protection system
- LED salt refill indicator, LED rinse aid refill indicator
- Self-cleaning filter system with 3 piece corrugated filter
- Dimensions (HxWxD): 84.5 x 60 x 60cm

¹ Scale of Energy Efficiency Classes from A to G


² Energy consumption in kWh per 100 cycles (in programme Eco 50 °C)

³ Water consumption in litres per cycle (in programme Eco 50 °C)

⁴ Duration of programme Eco 50 °C

**Serie | 4, free-standing dishwasher, 60 cm,
Stainless steel, lacquered
SMS46II01G**

measurements in mm

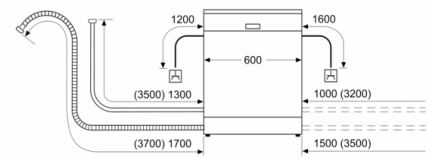

socket
() values with extension kit