

**Series 2, wall-mounted cooker hood,
60 cm, Stainless Steel
DWB65BC50I**



**Box-design hood: performance and
matching kitchen design bundled in one
hood.**

- **LED-Illumination:** The energy-saving lighting provides white and good lighting for the hob area.
- **Extraction rate:** Optimal performance to keep your kitchen odour free in no time
- 3-Speed Power Level Options To Suit Your Cooking Style And Recipes
- Converts to Recirculation Mode with Accessory Kit (Separate Purchase Required)
- Absorbs odors with Charcoal Replacement Filters (Available for sale)

Technical Data

Typology : Wall-mounted
 Length electrical supply cord : 150 cm
 Height of the chimney : 415-680/495-770 mm
 Height of product, without chimney : 53 mm
 Net weight : 15.4 kg
 Type of control : mechanical
 Number of speed settings : 3-stage
 Maximum output air extraction : 525 m³/h
 Maximum output recirculating air : 273 m³/h
 Number of lights : 2
 Noise level : 69 dB(A) re 1 pW
 Diameter of air outlet : 150 mm
 Grease filter material : Washable aluminium
 Odour filter : No
 Operating Mode : Convertible
 Optional accessories : DHZ5377
 Type of lamps used : LED
 Total power of the lamps : 6 W
 Grease filter type : Multilayer cassette
 Connection Rating : 216 W
 Voltage : 220-240 V
 Frequency : 50 Hz
 Plug type : India plug (10 Ampere)
 Installation typology : Wall-mounted
 Material body : Stainless steel
 Plug type : India plug (10 Ampere)
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product : 22.83 x 27.55 x 17.32
 Net weight : 34.000 lbs
 Gross weight : 38.000 lbs
 Motor location : Integrated motor in hood chimney
 No-return airflow flap : Yes
 Length electrical supply cord : 150 cm
 Dimensions of the product, with chimney (if exists) : 550-830 x 598.0 x 500.0 mm
 Dimensions of the packed product (HxWxD) : 580 x 700 x 440 mm
 Net weight : 15.4 kg
 Gross weight : 17.3 kg



4 242005 183418

Series 2, wall-mounted cooker hood, 60 cm, Stainless Steel DWB65BC50I

**Box-design hood: performance and matching
kitchen design bundled in one hood.**

Design

- Wall mounted hood
- Box design
- Appliance colour: stainless steel
- Push button control

Performance

- Maximum extraction power 606 m³/h (freeblowing)
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 69 dB(A) re 1 pW (55 dB(A) re 20 µPa sound pressure)
- Extraction rate in recirculation mode:
Max. normal use: 273 m³/h
- Noise level in recirculation mode:
Max. normal use: 66 dB(A) re 1 pW (52 dB(A) re 20 µPa sound pressure)
- 3 fan speed settings

Comfort


- 2 x 1.5W LED
- Light Intensity: 304 lux
- Colour Temperature: 3000 K
- Steel filter cover, dishwasher safe
- Energy Efficiency Class: C
- Average Energy Consumption: 91.8 kWh/year*
- Blower Efficiency Class: D*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*

Technical Information


- Suitable for ducted or recirculating operation only
- Diameter pipe Ø 150 mm (Ø 150 mm enclosed)
- Dimensions exhaust air (HxWxD): 450-830 x 598 x 500 mm
- Dimensions recirculating (HxWxD): 550-830 x 598 x 500 mm
- Total Connected load: 216 W
- Connecting cable 150 cm

** In accordance with the EU-Regulation No 65/2014*


Series 2, wall-mounted cooker hood, 60 cm, Stainless Steel DWB65BC50I

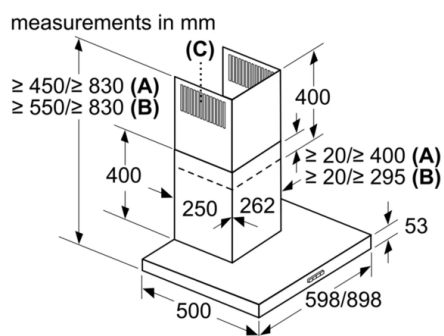


A: Exhaust air
B: Circulated air
C: Air outlet – slots for exhaust air
 to be mounted facing down

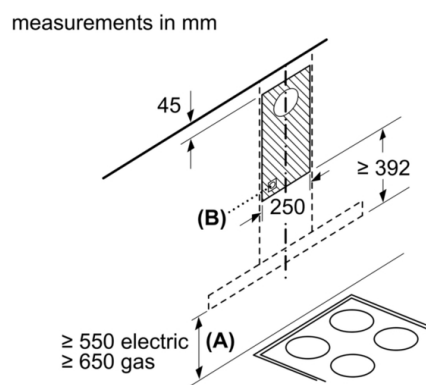

A: from upper edge of pan support
B: Socket

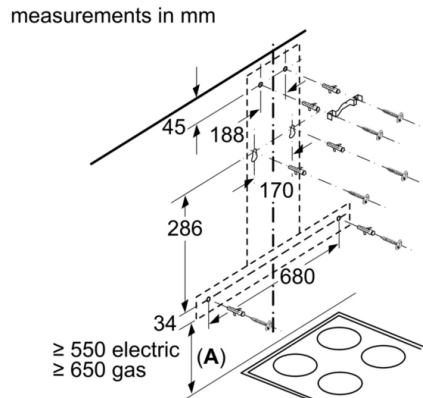

A: from upper edge of pan support

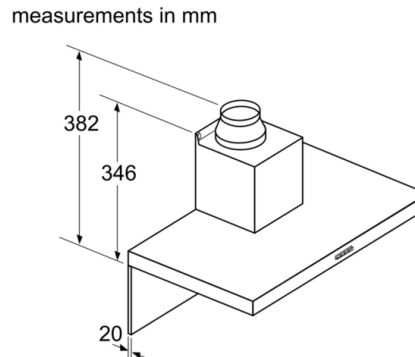

If a back panel is used, the design of the appliance must be considered.