

**Series 8, wall-mounted cooker hood,
90 cm, clear glass black printed
DWK98PR60I**



**Inclined hood: optimal for keeping an eye
on your pots and pans.**

- **PerfectAir sensor:** enjoy quieter, odour-free cooking.
- **For fast and effective extraction, the intensive speed setting removes strong kitchen odours quickly and effectively.**
- **Extra quiet: maximum extractor performance with minimal noise.**

DWZ0AK0R0	Long Life recirculation kit (chimless)
DWZ0AK0S0	Long Life recirculation kit
DWZ0AX5K0	Chimney extension 1000 mm
DWZ0AX5L0	Chimney extension 1500 mm
DWZ1AK1B6	Clean Air Plus odor filter (replacement)
DWZ1AK1I6	Clean Air Plus recirculation kit
DWZ1AK1V6	Clean Air Plus recirc. kit (chimless)
DWZ1AX5C6	Clean Air Plus recirc. kit external
DWZ1AX6E1	Chimney standard black
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)

Typology:Wall-mounted
 Length electrical supply cord: 130.0 cm
 Height of product, without chimney: 323 mm
 Net weight: 26.4 kg
 Type of control:Electronic
 Number of speed settings:3-stage + 2 intensive
 Max. air extraction:468 m³/h
 Boost position output recirculating:460 m³/h
 Max. air recirculation: 378 m³/h
 Boost position air extraction: 837 m³/h
 Number of lights: 2
 Noise level:55 dB(A) re 1pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material:Washable aluminium
 Odour filter: No
 Operating Mode:Convertible
 Optional accessories: DWZ0AK0R0, DWZ0AK0S0, DWZ0AX5K0,
 DWZ0AX5L0, DWZ1AK1B6, DWZ1AK1I6, DWZ1AK1V6, DWZ1AX5C6,
 DWZ1AX6E1, DZZ0XX0P0, DZZ1XX1B6
 Type of lamps used: LED
 Grease filter type: Multilayer cassette
 Connection rating: 150 W
 Fuse protection:10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type: India plug (6 Ampere)
 Installation typology:Wall-mounted
 Material body:Glass, Lacquered
 Plug type: India plug (6 Ampere)
 Dimensions of the product, with chimney (if exists) (in):x x
 Dimensions of the packed product: 27.16 x 29.13 x 40.94
 Net weight:58.000 lbs
 Gross weight: 77.000 lbs
 Motor location: Integrated motor in hood body
 No-return airflow flap: Yes
 Length electrical supply cord: 130.0 cm
 Dimensions of the product, with chimney (if exists):480 x 894.0 x
 548.0 mm
 Dimensions of the packed product (HxWxD): ... 690 x 740 x 1040 mm
 Net weight: 26.4 kg
 Gross weight: 35.1 kg
 Delay Shut off modes: 10 min



Series 8, wall-mounted cooker hood, 90 cm, clear glass black printed DWK98PR60I

Inclined hood: optimal for keeping an eye on your pots and pans.

Design

- Wall mounted hood
- 90 cm wide
- Black glass
- Touch control with lightline

Performance

- 3 speeds plus 2 intensive
- 2 capture areas: front side and bottom side
- Extraction rate according to EN 61591 \varnothing 15 cm:
 - max. Normal use: 467 m³/h
 - Intensive: 837 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
 - Max. normal use: 55 dB(A) re 1 pW (42 dB(A) re 20 μ Pa sound pressure)
 - Intensive: 67 dB(A) re 1 pW (54 dB(A) re 20 μ Pa sound pressure)
- Extraction rate in recirculation mode:
 - Max. normal use: 459 m³/h
 - Intensive: 703 m³/h

Comfort

- Cooktop-based hood control
 - (with matching cooktop)
- PowerBoost position
- Automatic 10 minutes after running
- Automatic revert setting, 6 minutes
- Easy to clean Innerframe
- Air quality sensor
- Light dimmer function
- Efficient BLDC-technology
- RimVentilation
- Saturation display filter: grease- and charcoal filter
- Steel filter cover, dishwasher safe

Technical Information

- Suitable for ducted or recirculating operation only
- In recirculation operation chimless use possible
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Dimensions exhaust air (HxWxD): 957-1227 x 894 x 548 mm
- Dimensions recirculating, chimney (HxWxD): 1017-1287 x 894 x 548 mm
- Dimensions recirculating, chimless (HxWxD): 480 mm x 894 x 548 mm
- Dimensions recirculating with CleanAir module (HxWxD):
 - 1147 x 894 x 548 mm - mounting with outer chimney
 - 1217-1487 x 894 x 548 mm - mounting with telescopic chimney
- Diameter pipe \varnothing 150 mm (\varnothing 120 mm enclosed)
- Power rating: 150 W

- India plug type


Remote Monitoring and Control (only in countries where Home Connect service is available)

- Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- Wall fixing inclined/flat/cube
- None, Cooktop-based hood control
- Total Connected load: 150 W


* In accordance with the EU-Regulation No 65/2014

**Series 8, wall-mounted cooker hood,
90 cm, clear glass black printed
DWK98PR60I**

Measurements in mm

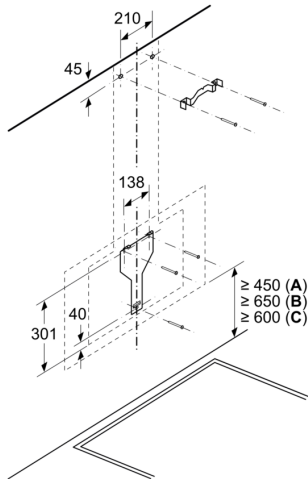

- A: Electric
- B: Gas - from upper edge of pan support
- C: Electric - for Australia and New Zealand

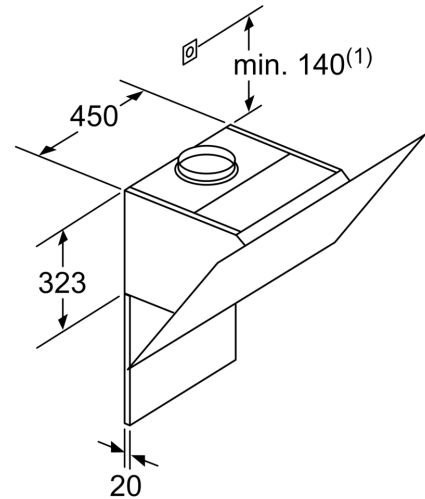


(1) Position of socket


Note the maximum thickness of the back panel.

measurements in mm


Measurements in mm

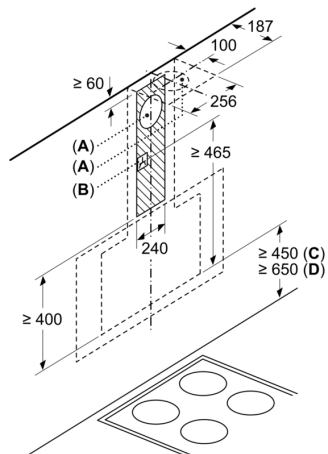


- A: Exhaust air
 - B: Socket
- From upper edge of pan support
- C: Electric
 - D: Gas

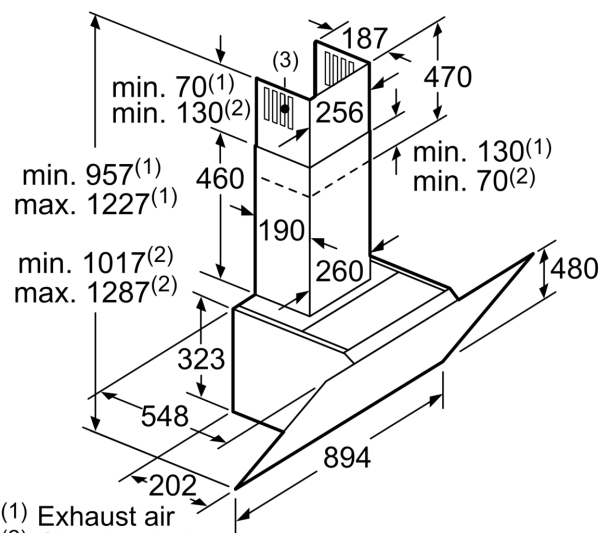

- (1) Exhaust air
 - (2) Circulated air
 - (3) Air outlet – slot for exhaust air to be mounted facing down
- measurements in mm

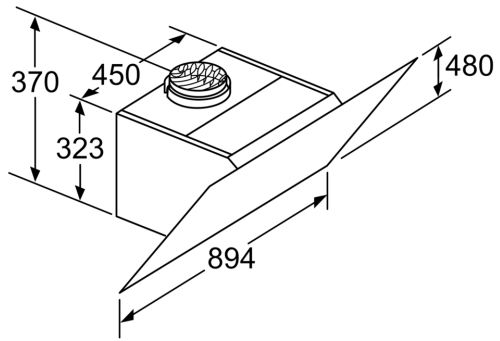

Appliance in circulated air mode
without duct
Circulated air set required
measurements in mm

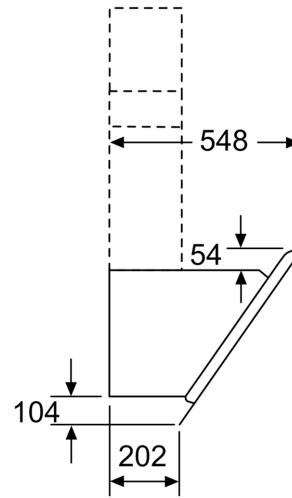

measurements in mm