

**Series 8, downdraft hood, 90 cm,
clear glass black printed
DDD97BM60B**



**The downdraft module provides you with
an open view into the kitchen and onto
the hob with high extraction rate and also
unnoticeably**

- **Silent:** maximal extractor performance with little noise
- Flexible installation of the blower allows a maximum space inside the cabinet.
- **LED-Illumination:** The energy-saving lighting provides white and good lighting for the hob area.
- **Intensive speed setting:** removes strong kitchen odours especially quickly and effectively.
- With exhaust, the air is cleaned by a grease filter and then ducted to the outside which ensures optimal kitchen air quality.

Technical Data

Typology : Downdraft
 Length electrical supply cord : 150 cm
 Min. required niche size for installation (HxWxD) : 738mm x 844.0mm x 104mm mm
 Net weight : 35.3 kg
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction : 530 m³/h
 Boost position output recirculating : 500.0 m³/h
 Maximum output recirculating air : 452 m³/h
 Boost position air extraction : 750 m³/h
 Number of lights : 1
 Noise level : 62 dB(A) re 1 pW
 Diameter of air outlet : 150 mm
 Grease filter material : Washable aluminium
 Odour filter : No
 Operating Mode : Convertible
 Delay Shut off modes : 10 min
 Optional accessories : DSZ9ID0M0, DSZ9ID0P0, DSZ9ID0Q0
 Grease filter type : Kasette
 Connection Rating : 317 W
 Fuse protection : 10 A
 Voltage : 220-240 V
 Frequency : 50 Hz
 Plug type : GB plug
 Installation typology : Built-in
 Material body : Glass, Stainless steel
 Plug type : GB plug
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product : 17.04 x 38.11 x 39.56
 Net weight : 78.000 lbs
 Gross weight : 113.000 lbs
 Motor location : Integrated motor in hood body
 No-return airflow flap : No
 Length electrical supply cord : 150 cm
 Dimensions of the product, with chimney (if exists) : x 918.0 x 268.0 mm
 Dimensions of the packed product (HxWxD) : 433 x 968 x 1005 mm
 Net weight : 35.3 kg
 Gross weight : 51.1 kg



4 242005 074198

**Series 8, downdraft hood, 90 cm, clear glass
black printed
DDD97BM60B**

**The downdraft module provides you with
an open view into the kitchen and onto
the hob with high extraction rate and also
unnoticeably**

Environment and safety:

- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 54.2 kWh/year
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: D

** In accordance with the EU-Regulation No 65/2014*

Variant:

Design:

- 92 cm wide
- black with glass canopy
- 92 cm Downdraft, black

Comfort:

- Suitable for ducted or re-circulated extraction
- In recirculation mode no combination with gas cooktops allowed.
- Extension height 300 mm
- Recirculating kit
- Electronic controls
- TouchControl
- 3 speeds plus 2 intensive
- Intensivstufe mit automatischer Rückstellung, 5 oder 10 Minuten
- Automatic 10 minutes after running
- Capacitor motor
- RimVentilation
- Metal grease filter, dishwasher safe
- Saturation indicator for grease filter and odor filter

Technical information


- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 530 m³/h
Intensive 750 m³/h
- Noise level according to EN 60704-2-13 exhaust air:
Max. normal use: 62 dB(A) re 1 pW
Intensive: 67 dB(A) re 1 pW
- Extraction rate in recirculation mode:
Max. normal use: 452 m³/h
Intensive: 500 m³/h
- Noise levels in recirculation mode:
Max. normal use: 72 dB(A) re 1 pW
Intensive: 75 dB(A) re 1 pW
- Noise min./max. Normal Level: 43/62 dB
- Power rating: 317 W

Measures:

- Light Intensity: 203 lux
- Colour Temperature: 3500 K




Series 8, downdraft hood, 90 cm, clear glass black printed DDD97BM60B

Combination with electric hob




For use with gas hob see drawing
"Combination with gas hob".

measurements in mm

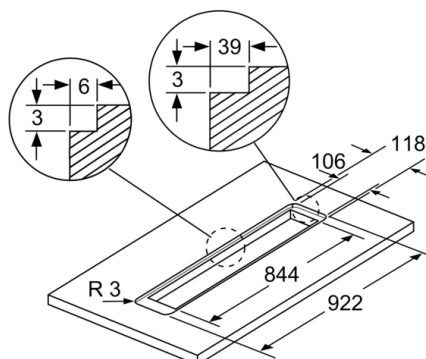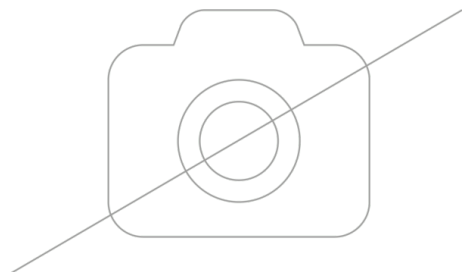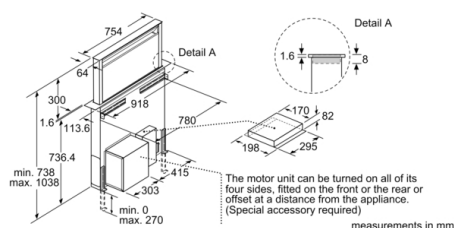


For flush installation in stone and granite
work surfaces

measurements in mm

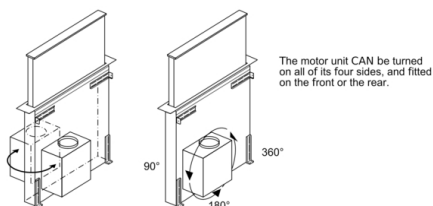


The motor unit CAN be turned
on all of its four sides, and fitted
on the front or the rear.

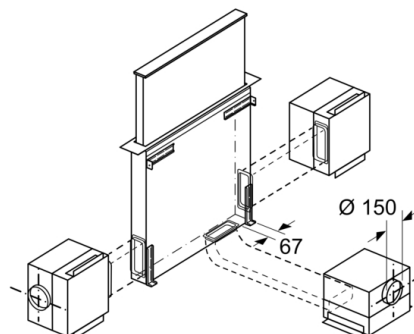

The motor unit can be fitted at
a maximum distance of three metres
from the appliance.
(Special accessory required)

Series 8, downdraft hood, 90 cm, clear glass black printed DDD97BM60B


Combination with gas hob 75 cm



Use with gas hob only possible
in air extraction mode.
Total maximum output: 11.9 kW
Maximum output of wok 4.2 kW.
Total maximum output of rear hobs: 4.7 kW


measurements in mm

Combination with gas hob 90 cm



Use with gas hob only possible
in air extraction mode.
Total maximum output: 13.7 kW
Maximum output of wok 6 kW.
Total maximum output of rear hobs: 4.7 kW

measurements in mm

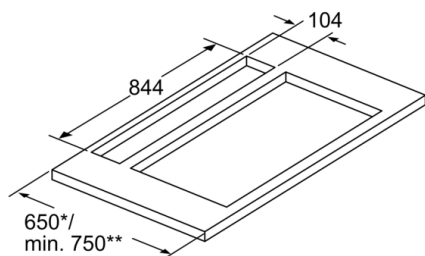

Only install one side of the appliance at
least 50 mm from a high-sided unit or a wall.

* 650 mm depth only in combination with
slim hobs.

** min. 750 mm for hobs with 500 mm
cut-out depth.

measurements in mm