

**Series 2, canopy cooker hood, 53 cm,
Grey
DLN53AA70**



DWZ0IN0A0 Standard odor filter (replacement)
DWZ0IN0T0 Standard recirculation kit

The canopy cooker hood: offers you flexibility in your kitchen planning - mount it either on the wall or above a kitchen island.

- **Silence:** maximal extractor performance with little noise

Typology: Built-in/Built-under
Length electrical supply cord: 150 cm
Required niche size for installation (HxWxD): ... 208mm x 493.0mm x 257mm mm
Net weight:5.8 kg
Type of control: mechanical
Number of speed settings: 3
Max. air extraction: 302 m³/h
Max. air recirculation: 300 m³/h
Number of lights: 2
Noise level:62 dB(A) re 1 pW
Diameter of air outlet: 120 mm
Grease filter material:Washable aluminium
Odour filter: No
Operating Mode:Exhaust / Recirculation (Accessory available separately)
Optional accessories: DWZ0IN0A0, DWZ0IN0T0
Type of lamps used: Not applicable
Total power of the lamps: 6 W
Grease filter type:Kassette
Clean filter reminders:No
Connection rating: 121 W
Fuse protection: KSA A
Voltage: 220-240 V
Frequency: 50 Hz
Plug type: Gardy plug w/ earthing
Installation typology: Built-in
Material body: Lacquered
Plug type: Gardy plug w/ earthing
Dimensions of the product, with chimney (if exists) (in):x x
Dimensions of the packed product: 9.84 x 24.01 x 14.17
Net weight: 13.000 lbs
Gross weight: 15.000 lbs
Motor location: Integrated motor in hood body
No-return airflow flap: Yes
Length electrical supply cord: 150 cm
Dimensions of the product, with chimney (if exists): .x 534.0 x 300.0 mm
Dimensions of the packed product (HxWxD): 250x610x360 mm
Net weight:5.8 kg
Gross weight: 7.0 kg



Series 2, canopy cooker hood, 53 cm, Grey DLN53AA70

The canopy cooker hood: offers you flexibility in your kitchen planning - mount it either on the wall or above a kitchen island.

-
- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
 - Average Energy Consumption: 67.7 kWh/year
 - Blower Efficiency Class: E*
 - Lighting Efficiency Class: D
 - Grease Filtering Efficiency Class: D
 - Noise min./max. Normal Level: 46/62 dB

Variant:

Design:

Technical information

Environment and safety:

Comfort:


Measures:

- Canopy grey
- Suitable for ducted or re-circulated extraction
- Recirculating kit
- For installation in a kitchen cabinet
- Sliding switch control
- 3 speeds
- Single motor
- Metal grease filter, dishwasher safe
- 2 x 4 W LED 3W E14
- Light Intensity: 78 lux
- Colour Temperature: 2700 K
- Extraction rate exhaust air according to EN 61591: max. 302 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 62 dB(A) re 1 pW (48 dB(A) re 20 µPa sound pressure)
- Max. extraction rate: 302 m³/h
- Dimensions (HxWxD): 208 x 534 x 300 mm
- Built-in dimensions (HxWxD): 208 x 493 x 257 mm
- Power rating: 121 W
- 120 mm diameter pipe
- with one-way flap


Technical information

* In accordance with the EU-Regulation No 65/2014


**Series 2, canopy cooker hood, 53 cm,
Grey
DLN53AA70**

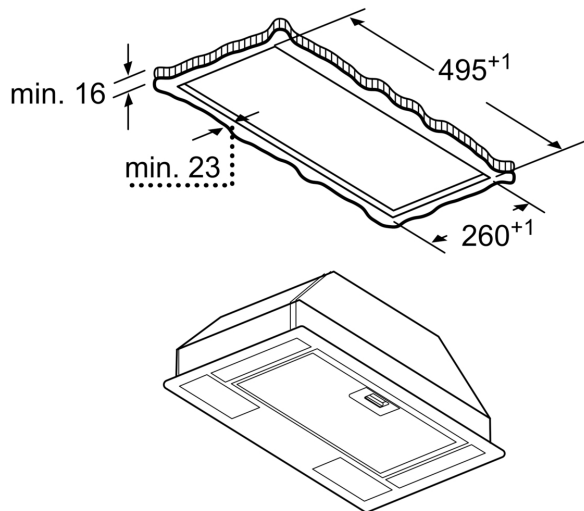


measurements in mm

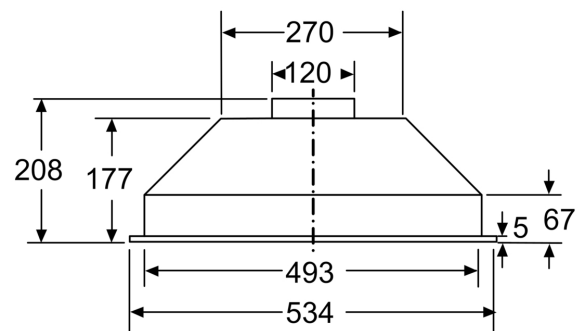

measurements in mm

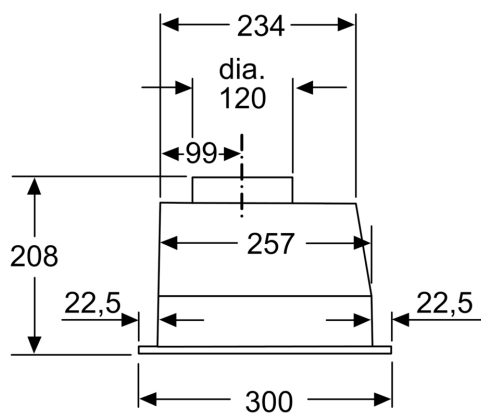

measurements in mm

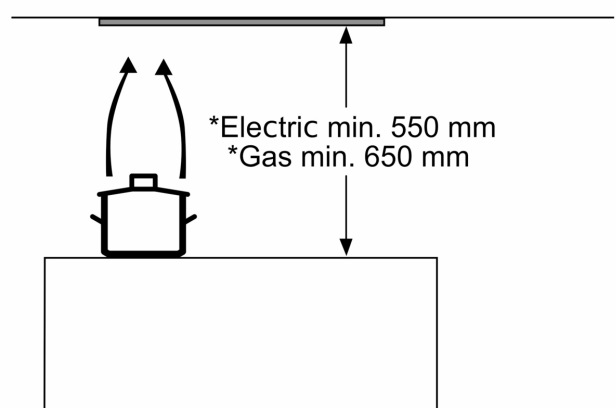

* from upper edge of
pan support

measurements in mm

*Electric min. 550 mm
*Gas min. 650 mm