

**BOSCH**

Series 2, built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, sliding hinge **KIN865SF0**



KSZB6R00 Bottle Rack
KSZGGM00 Butter box

- **LED lighting:** keep your groceries in perfect view.
- **Super Freezing function:** Protects frozen food from defrosting.
- **NoFrost:** never defrost again, thanks to perfect protection from ice formation - that saves time and effort.

| | |
|--|------------------------|
| Energy Efficiency Class (Regulation (EU) 2017/1369): | F |
| Average annual energy consumption in kilowatt hour per year (kWh/a): | 293 kWh/annum |
| Sum of volume of frozen compartments: | 76 l |
| Sum of volume of chill compartments: | 184 l |
| Airborne acoustical noise emissions : | 39 dB(A) re 1 pW |
| Airborne acoustical noise emission class: | C |
| Built-in / Free-standing: | Built-in |
| Number of compressors: | 1 |
| Number of independent cooling systems: | 1 |
| Width of the appliance: | 541 mm |
| Height: | 1772 mm |
| Depth of the product: | 548 mm |
| Net weight: | 50.8 kg |
| Min. required niche size for installation (HxWxD): | 1775.0 x 560 x 550 mm |
| Door panel options: | Not possible |
| Door hinge: | Right reversible |
| Number of Adjustable Shelves in fridge compartment: | 3 |
| Shelves for Bottles: | No |
| Frost free system: | Freezer |
| Interior ventilator: | No |
| Reversible Door Hinge: | Yes |
| Length electrical supply cord: | 230.0 cm |
| Noise level: | 39 dB(A) re 1 pW |
| Multi-Flow Air Tower: | No |
| Fast cooling switch: | No |
| Fast freezing function: | Yes |
| Temperature Controlled Drawer: | No |
| Humidity Control Drawer: | No |
| Number of Door Bins - Refrigerator: | 3 |
| Door bin adjustability - Refrigerator: | Yes |
| Tilt-out door bins in fridge: | Yes |
| Gallon wide door bins: | Yes |
| Number of Gallon storage: | 1 |
| Motorized Shelf: | No |
| Material of the shelves: | Safety glass |
| Door opened indicator freezer: | No |
| Automatic motor-driven ice-maker: | No |
| Fuse protection: | 10 A |
| Voltage: | 220-240 V |
| Frequency: | 50 Hz |
| Storage Period in Event of Power Failure (h): | 10 h |
| Door panel options: | Not possible |
| Noise level: | 39 dB(A) re 1 pW |
| Energy Star Qualified: | No |
| Plug type: | Gardy plug w/ earthing |
| Required cutout/niche size for installation (in): | x |
| Dimensions of the packed product: | 72.45 x 24.01 x 25.19 |
| Net weight: | 112.000 lbs |
| Gross weight: | 123.000 lbs |



Series 2, built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, sliding hinge KIN865SF0

-
- easy Installation

Performance and consumption

- EU19_EEK_D: F
- Total Volume : 260 l
- Net Fridge Volume : 184 l
- Net Freezer Volume : 76 l
- Freezing capacity 24h : 4 kg
- Annual Energy Consumption: 293 kWh/a
- Climate Class: SN-ST
- yes
- Noise Level : 39 dB
- Temperature rise time : 10 H

Design and Styling

- LED interior light in fridge section

Convenience & Safety

- LED electronic control
- Super Cooling: No
- Optical and acoustic door open warning system

Fridge Compartment

- 4 safety glass shelves, of which 3 are height adjustable
- 3 door bins, there of 0x dairy compartment
- 1 door trays

Freshness System

- 1 MultiBox - Transparent drawer with a corrugated bottom, ideal for storing fruits and vegetables.

Freezer Section

- Super Freezing: manual activation
- NoFrost - never again defrosting!
- 3 transparent freezer drawers

Dimensions

- Dimensions (H x W x D): 177.2 cm x 54.1 cm x 54.8 cm
- Niche Dimension (H x W x D): 177.5 cm x 56.0 cm x 55.0 cm

Technical Information

- Door right hinged, reversible
- Nominal voltage: 220 - 240 V

Accessories

- butter dish
- egg tray ice cube tray

Country Specific Options


- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.






BOSCH

**Series 2, built-in fridge-freezer with
freezer at bottom, 177.2 x 54.1 cm,
sliding hinge
KIN865SF0**

measurements in mm

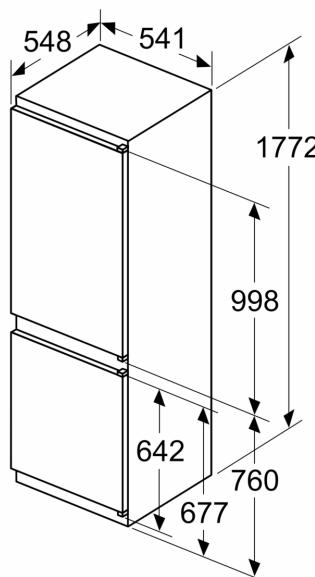

A: Air inlet ≥ 200 cm²; Ventilation options
B: Air outlet ≥ 200 cm²; Ventilation options

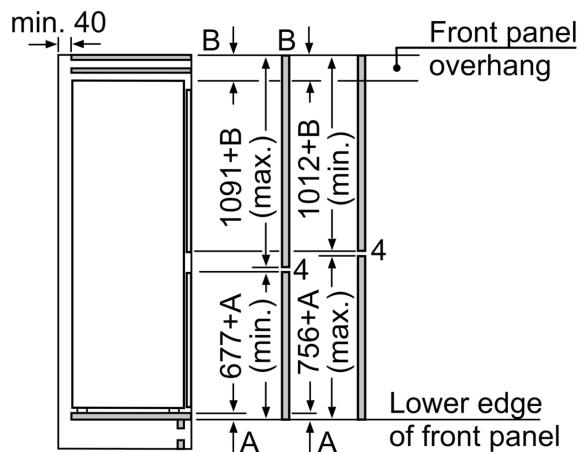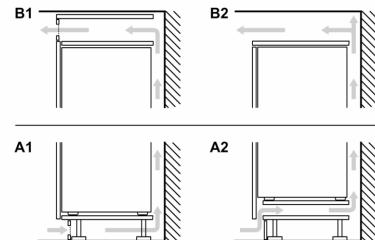

The specified unit door dimensions
are valid for a door gap of 4 mm.

measurements in mm

