

Series 6, Wall-mounted Hood, 90 cm, clear glass black printed DWK97JQ60B



DWZ0AK0R0	Long Life recirculation kit (chimless)
DWZ0AK0S0	Long Life recirculation kit
DWZ0AX5K0	Chimney extension 1000 mm
DWZ0AX5L0	Chimney extension 1500 mm
DWZ1AK1B6	Clean Air Plus odor filter (replacement)
DWZ1AK1I6	Clean Air Plus recirculation kit
DWZ1AK1V6	Clean Air Plus recirc. kit (chimless)
DWZ1AX5C6	Clean Air Plus recirc. kit external
DWZ1AX6E1	Chimney standard black
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)

Inclined hood: optimal for keeping an eye on your pots and pans.

- **extra silent:** maximal extractor performance with very minimal noise.
- **Easy-to-clean interior:** hidden screws and cables along with rounded edges make cleaning easy.
- **With exhaust, the air is cleaned by a grease filter and then ducted to the outside which ensures optimal kitchen air quality.**
- **For fast and effective extraction, the intensive speed setting removes strong kitchen odours quickly and effectively.**
- **Intensive speed setting with reset:** automatically resets the hood to normal speed setting

Typology:	Wall-mounted
Length electrical supply cord:	130.0 cm
Height of product, without chimney:	323 mm
Net weight:	23.2 kg
Type of control:	Electronic
Number of speed settings:	3-stage + 2 intensive
Max. air extraction:	431 m³/h
Boost position output recirculating:	441 m³/h
Max. air recirculation:	355 m³/h
Boost position air extraction:	714 m³/h
Number of lights:	2
Noise level:	53 dB(A) re 1pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable aluminium
Odour filter:	No
Ventilation mode:	Convertible
Optional accessories:	DWZ0AK0R0, DWZ0AK0S0, DWZ0AX5K0, DWZ0AX5L0, DWZ1AK1B6, DWZ1AK1I6, DWZ1AK1V6, DWZ1AX5C6, DWZ1AX6E1, DZZ0XX0P0, DZZ1XX1B6
Type of lamps used:	LED
Grease filter type:	Kassette
Clean filter reminders:	Yes
Connection rating:	143 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50; 60 Hz
Plug type:	GB plug
Installation typology:	Wall-mounted
Material of the body:	Glass, Lacquered
Plug type:	GB plug
Dimensions of the product, with chimney (if exists) (in):	27.16 x 29.13 x 40.94
Dimensions of the packed product:	27.16 x 29.13 x 40.94
Net weight:	51.000 lbs
Gross weight:	70.000 lbs
Motor location:	Integrated motor in hood body
No-return airflow flap:	No
Length electrical supply cord:	130.0 cm
Dimensions of the product, with chimney (if exists):	452 x 890.0 x 499.0 mm
Dimensions of the packed product (HxWxD):	690 x 740 x 1040 mm
Net weight:	23.2 kg
Gross weight:	31.9 kg





Series 6, Wall-mounted Hood, 90 cm, clear glass black printed DWK97JQ60B

**Inclined hood: optimal for keeping an eye
on your pots and pans.**

Design

- Chimney hood, 89 cm
- 90 cm
- Appliance colour: black
- Wall mounted hood
- Electronic controls via TouchControl

Technical information

- Twin channel high performance fan motor
- 3-stage + 2 intensive
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 431 m³/h Intensive 714 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air at normal use max.: 53 dB(A) re 1 pW (53 dB(A) re 20 µPa sound pressure)
- Energy Efficiency Class: A (at a range of energy efficiency classes from A++ to E)
- Average Energy Consumption: 34.6 kWh/year*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Noise min./max. Normal Level: 45/53 dB*

Comfort



- Suitable for ducted or re-circulated extraction
- air quality sensor 1.1
- Metal grease filter, dishwasher safe
- Rimm ventilation
- Filter cover glass
- 2 capture areas: front side and bottom side
- easy to clean yes
- 2 x 1,5W LED
- Light dimmer function
- Light Intensity: 238 lux
- Colour Temperature: 3500 K
- In recirculation operation chimless use possible
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed

Technical information


- Dimensions exhaust air (HxWxD): 928-1198 x 890 x 499 mm
- Dimensions recirculating, chimney (HxWxD): 988-1258 x 890 x 499 mm
- Dimensions recirculating, chimless (HxWxD): 452 mm x 890 x 499 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Connected load: 143 W

* In accordance with the EU-Regulation No 65/2014

**Series 6, Wall-mounted Hood, 90 cm,
clear glass black printed
DWK97JQ60B**

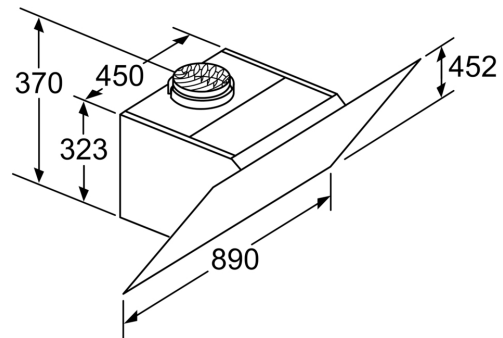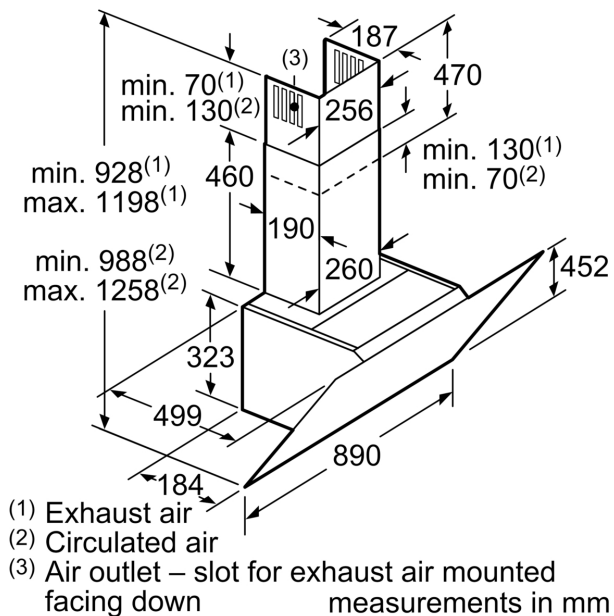


Appliance in circulated air mode
without duct
Circulated air set required
measurements in mm

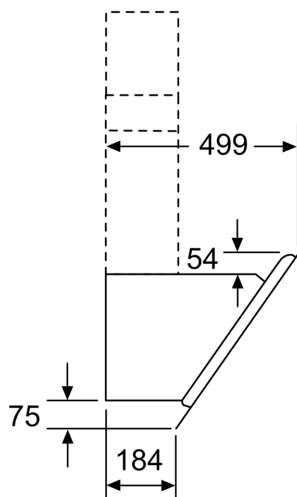

measurements in mm


Measurements in mm

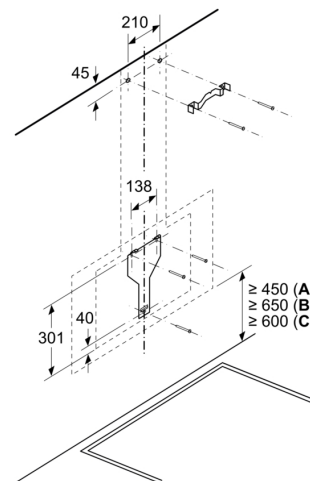

A: Electric


B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand

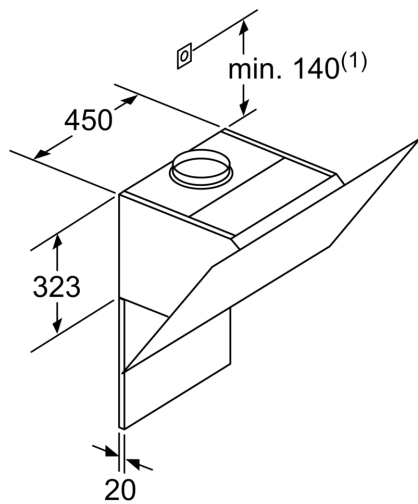

(1) Position
of socket

Note the maximum
thickness of the back panel.
measurements in mm

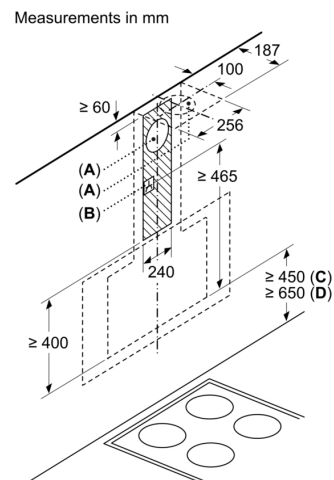

A: Exhaust air
B: Socket

From upper edge of pan support

C: Electric
D: Gas