

Serie | 8, Built-in compact oven with steam function, 60 x 45 cm, Stainless steel
CSG656BS1B



Included accessories

1 x grid, 1 x universal pan, 1 x steam container, punched, size S, 1 x steam container, punched, size XL, 1 x steam container, unpunched, size S

Optional accessories

HEZ327000 : Pizza stone

The compact steam oven with hot air function: lets you combine gentle cooking with the power of hot air.

- **Steam baking:** by adding steam, foods turn out crispy on the outside and juicy on the inside.
- **DishAssist:** automatic setting of the optimal type of heat, temperature and time for countless dishes.
- **TFT touchscreen control:** easy-to-use thanks to the control ring with full text and images.
- **EcoClean Direct:** cleaning made easy thanks to a special coating on the rear, side walls and roof that absorbs grime.

Technical Data

| | |
|---|-------------------------|
| Color / Material Front : | Stainless steel |
| Built-in / Free-standing : | Built-in |
| Door opening : | Drop down |
| Required niche size for installation (HxWxD) : | 450-455 x 560-568 x 550 |
| Dimensions : | 455 x 594 x 548 |
| Dimensions of the packed product (HxWxD) (mm) : | 520 x 650 x 710 |
| Control Panel Material : | Stainless steel |
| Door Material : | Glass |
| Net weight (kg) : | 34.549 |
| Approval certificates : | CE, VDE |
| Length electrical supply cord (cm) : | 150 |
| EAN code : | 4242002807522 |
| Current (A) : | 16 |
| Voltage (V) : | 220-240 |
| Frequency (Hz) : | 60; 50 |
| Plug type : | no plug |
| Approval certificates : | CE, VDE |
| Number of cavities (2010/30/EC) : | 1 |
| Usable volume (of cavity) - NEW (2010/30/EC) : | 47 |
| Energy efficiency rating : | A+ |
| Energy consumption per cycle conventional (2010/30/EC) : | 0.73 |
| Energy consumption per cycle forced air convection (2010/30/EC) : | 0.61 |
| Energy efficiency index (2010/30/EC) : | 81.3 |



Serie | 8, Built-in compact oven with steam function, 60 x 45 cm, Stainless steel CSG656BS1B

The compact steam oven with hot air function: lets you combine gentle cooking with the power of hot air.

- Compact steam oven with 12 heating methods:

- 4D hot air
- 4D HotAir Eco
- Top/Bottom heating
- Top/bottom heating Eco
- Hot-air grilling
- Grill large area
- Small area grill
- Pizza setting
- Bottom heating
- Slow cooking
- Plate warming
- Keep warm

- Additional heating methods with steam:

- FullSteam
- Reheating
- Dough Proving
- defrost

- Temperature range: 30 °C-250 °C

- Cavity volume: 47 l

- Large: 1 litre water tank

Design

- SoftMove Door - SoftOpen & SoftClose

Convenience

- TFT display screen

- Supporting systems:

- DishAssist - automatic oven settings

- Additional functions:

- descaling programme
- drying function

- Automatic rapid heat function

- Child lock

- Residual heat indicator
- Automatic switch off

- LED light

- Location of the steam generator is outside of the cavity.

- Cooling fan

Cleaning

- EcoClean Direct: A microfine ceramic bead coating on the oven's interior ceiling, sides and back. It absorbs fat droplets and breaks them down while you bake or roast to keep the inside of the oven clean

- EasyClean cleaning program: Just add 400ml water and a drop of washing-up liquid in the base pan (recessed area on the bottom of the oven cavity) and run the EasyClean

program. This helps to soften baked-on residue so that you can just wipe it down for fast and uncomplicated cleaning

Accessories

- 1 x universal pan, 1 x grid, 1 x steam container, punched, size XL, 1 x steam container, punched, size S, 1 x steam container, unpunched, size S

Technical Information


- Appliance dimension (HxWxD): 455 mmx594 mmx548 mm

- Length of mains cable: 150 cm

- Please reference the built-in dimensions provided in the installation drawing

Serie | 8, Built-in compact oven with steam function, 60 x 45 cm, Stainless steel CSG656BS1B


Installation with a hob.

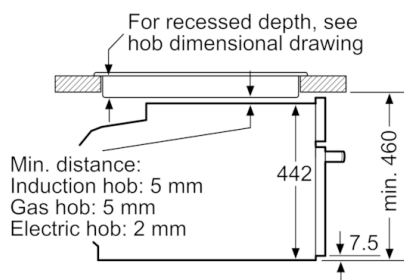


measurements in mm

If the compact appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

| Hob type | min. worktop thickness | |
|----------------------------|------------------------|-------|
| | fitted | flush |
| Induction hob | 42 mm | 43 mm |
| Full surface Induction hob | 52 mm | 53 mm |
| Gas hob | 32 mm | 43 mm |
| Electric hob | 32 mm | 35 mm |

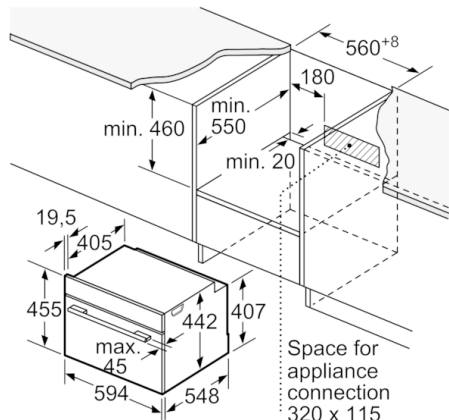

measurements in mm

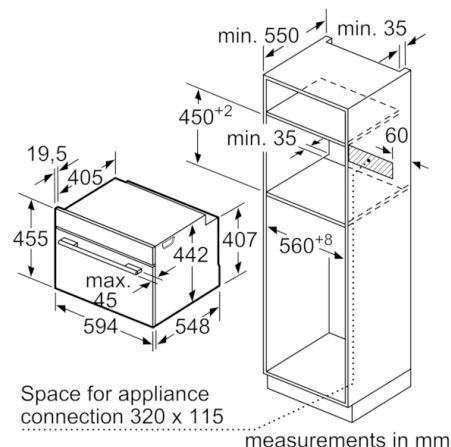

measurements in mm

