

Series 8, integrated rangehood, 86 cm, Stainless steel DHL895DAU



DWZ1IX1B6	Clean Air Plus odor filter (replacement)
DWZ1IX1C6	Clean Air Plus recirc. kit external
DHZ5316	Standard odor filter (replacement)
DHZ5605	Standard recirculation kit
DWZ0IT0P0	Long Life odor filter (replacement)
DWZ1IT1D1	Long Life recirculation kit external

The integrated rangehood: offers a sleek and seamless design in the kitchen with fully integrated installation.

- **LED lighting:** Energy-efficient LED lighting for bright, even cooktop illumination.
- **Intensive speed setting:** quickly removes steam and strong cooking odours for a fresher kitchen.

Typology: Built-in/Built-under
 Length electrical supply cord: 150 cm
 Required niche size for installation (HxWxD): ... 418mm x 836.0mm x 264mm mm
 Minimum distance above an electric hob: 600 mm
 Minimum distance above a gas hob: 650 mm
 Net weight: 9.6 kg
 Type of control: Electronic
 Number of speed settings: 3-stages + intensive setting
 Max. air extraction: 610 m³/h
 Boost position output recirculating: 727 m³/h
 Max. air recirculation: 563 m³/h
 Boost position air extraction: 800 m³/h
 Number of lights: 2
 Noise level: 64 dB(A) re 1pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material: Washable aluminium
 EAN code: 4242005141241
 Connection rating: 172 W
 Fuse protection: 3 A
 Voltage: 220-240 V
 Frequency: 50 Hz
 Plug type: AU plug
 Installation type: Built-in



4 242005 141241

Series 8, integrated rangehood, 86 cm, Stainless steel DHL895DAU

The integrated rangehood: offers a sleek and seamless design in the kitchen with fully integrated installation.

Design and Innovation

- 86 cm, Integrated Rangehood
- Appliance colour: Stainless steel
- Electronic controls via Push button controls with LED display

Power and Mode of Operation

- 3 power settings plus intensive setting
- Extraction rate according to EN 61591:
 - Min: 210m³/h
 - Intensive: 800 m³/h
- Noise min./max. Normal Level: 41/64 dB*
- EcoSilence Drive BLDC motor
- Rim ventilation
- Suitable for ducted or recirculated extraction
- Recirc. kit or clean air kit


Comfort & Convenience

- Dishwasher safe metal grease filters
- Saturation display for filters
- 6 min
- 2 x 1 Watt LED lights


Dimensions (HxWxD)

- Dimensions exhaust air (HxWxD): 418-418 x 860 x 282 mm
- Dimensions recirculating (HxWxD): 418-418 x 860 x 282 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Power rating: 172 W
- Electrical cable length 1.5 m


**Series 8, integrated rangehood, 86
cm, Stainless steel
DHL895DAU**

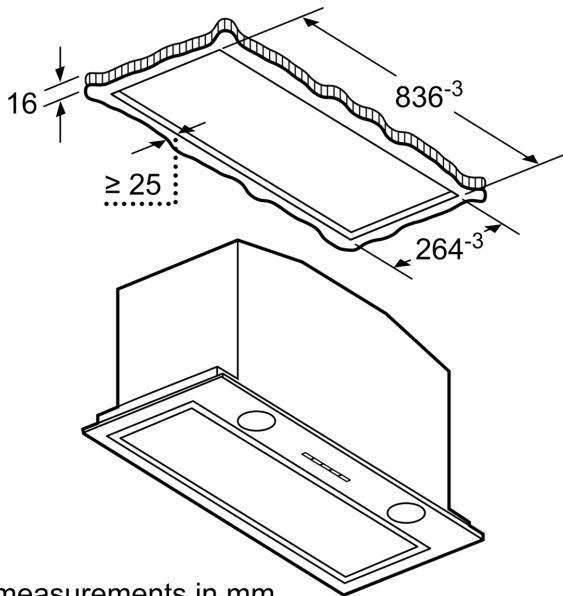

measurements in mm

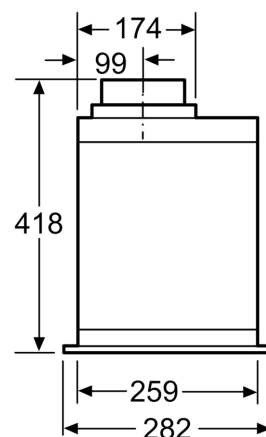


measurements in mm

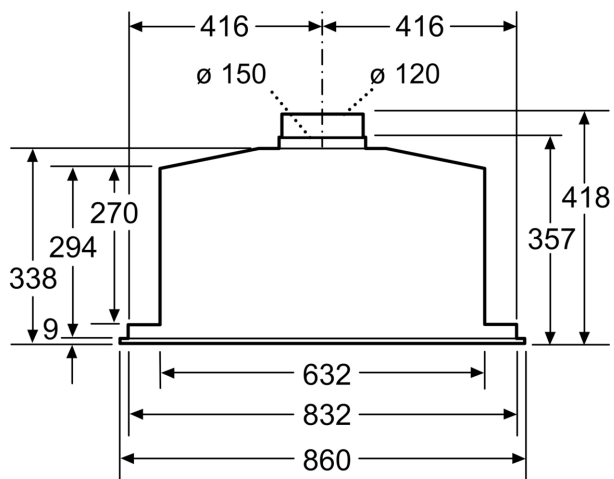

measurements in mm

Measurements in mm

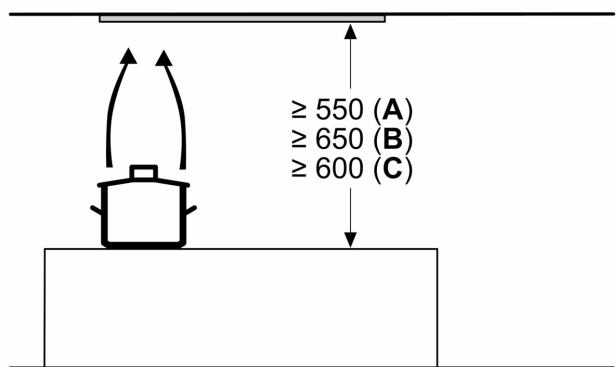

A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand