

Series 6, Wall-mounted canopy rangehood, 90 cm, Stainless steel DWB97LM50A



DHZ1223	Chimney extension 1000 mm
DHZ1233	Chimney extension 1500 mm
DHZ5345	Standard recirculation kit
DHZ5346	Standard odor filter (replacement)
DWZ0XX0J5	Long Life recirculation kit
DWZ1CX1I6	Clean Air Plus recirculation kit
DWZ2CB1I4	Clean Air Standard recirculation kit
DWZ2CX5C6	Clean Air Plus recirc. kit external
DWZ2FX5D1	Long Life recirculation kit external
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)
DZZ2CB1B4	Clean Air Standard odor filter (repl.)

The wall-mounted chimney hood: mount it on the wall, giving you complete freedom in your kitchen planning.

- **Intensive speed setting with reset:** automatically resets the rangehood to normal speed setting after 6 min..
- **Extra silent:** the high-performance rangehood, with minimal noise.

Typology:Wall-mounted
 Length electrical supply cord: 130.0 cm
 Height of the chimney: 582-908/568-1018 mm
 Height of product, without chimney:46 mm
 Minimum distance above an electric hob: 600 mm
 Minimum distance above a gas hob:650 mm
 Net weight: 18.1 kg
 Type of control:Electronic
 Number of speed settings: 3-stages + intensive setting
 Max. air extraction: 431 m³/h
 Boost position output recirculating:442 m³/h
 Max. air recirculation: 343 m³/h
 Boost position air extraction: 697 m³/h
 Number of lights: 3
 Noise level:55 dB(A) re 1pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material: Washable stainless steel
 EAN code:4242005107728
 Connection rating: 145 W
 Fuse protection:10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type: AU plug
 Installation type: Wall-mounted



4 242005 107728

Series 6, Wall-mounted canopy rangehood, 90 cm, Stainless steel DWB97LM50A

**The wall-mounted chimney hood: mount it
on the wall, giving you complete freedom
in your kitchen planning.**

Design

- Box brand design
- Appliance colour: Stainless steel

Operating and power

- 3 power settings plus intensive setting
- Extraction rate according to EN 61591:
 - Min: 287.1 m³/h
 - Intensive: 697 m³/h
- Noise min./max. Normal Level: 45/55 dB*
- Noise level in recirculation mode:
 - Max. normal use: 66 dB(A) re 1 pW

Comfort & Convenience


- Suitable for ducted or recirculating operation
- Recirc. kit or clean air kit
- Intensive setting with automatic switch back to previous setting
- Saturation indicator for metal & carbon filters
- with one-way flap
- Dishwasher safe metal grease filters
- 3 x LM3-01_LED_1,5W
- 6 min
- Additional noise insulation

Technical Information

Dimensions (HxWxD)

- Appliance (ducted air): 614-954 x 898 x 500 mm
- Dimensions exhaust air (HxWxD): 614-954 x 898 x 500 mm
- Dimensions recirculating (HxWxD): 614-1064 x 898 x 500 mm
- Dimensions recirculating with cleanAir module (HxWxD);
 - 689 x 898 x 500 mm - mounting with outer chimney
 - 795-1139 x 898 x 500 mm - mounting with telescopic chimney
- 145 W total connected load
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.3 m

Measurements in mm

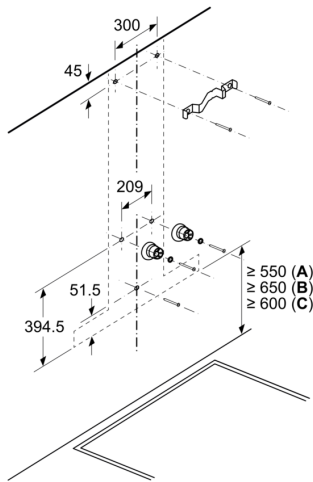

A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand