

**Series 2, Wall-mounted canopy  
rangehood, 60 cm, Stainless steel  
DWP66BC50A**



DHZ1224	Chimney extension 500 mm
DHZ1234	Chimney extension 750 mm
DHZ5275	Standard recirculation kit
DHZ5276	Standard odor filter (replacement)
DHZ6550	Brushed steel back panel
DHZ6551	Brushed steel back panel

**Pyramid hood: perfect performance  
matching your kitchen.**

- 3-Speed Power Level Options To Suit Your Cooking Style And Recipes
- Absorbs odors with Charcoal Replacement Filters (Available for sale)

Typology:	.....	Wall-mounted
Length electrical supply cord:	.....	130.0 cm
Height of the chimney:	.....	553-730/573-730 mm
Height of product, without chimney:	.....	246 mm
Minimum distance above an electric hob:	.....	600 mm
Minimum distance above a gas hob:	.....	650 mm
Net weight:	.....	8.8 kg
Type of control:	.....	mechanical
Number of speed settings:	.....	3
Max. air extraction:	.....	598 m <sup>3</sup> /h
Max. air recirculation:	.....	406 m <sup>3</sup> /h
Number of lights:	.....	2
Noise level:	.....	69 dB(A) re 1pW
Diameter of air outlet:	.....	120 / 150 mm
Grease filter material:	.....	Washable aluminium
EAN code:	.....	4242005100637
Connection rating:	.....	220 W
Fuse protection:	.....	10 A
Voltage:	.....	220-240 V
Frequency:	.....	50; 60 Hz
Plug type:	.....	AU plug
Installation type:	.....	Wall-mounted



4 242005 100637

**Series 2, Wall-mounted canopy  
rangehood, 60 cm, Stainless steel  
DWP66BC50A**

**Pyramid hood: perfect performance  
matching your kitchen.**

**Design**

- Pyramidal
- For Wall mounted installation
- Appliance colour: Stainless steel
- push buttons

**Operating and power**

- Extraction rate exhaust air according to EN 61591 max. 597 m<sup>3</sup>/h
- Extraction rate in recirculation mode:
  - Max. normal use: 406 m<sup>3</sup>/h
  - Noise level in recirculation mode:
  - Max. normal use: 75 dB(A) re 1 pW
  - Noise min./max. Normal Level: 49/69 dB\*


**Comfort & Convenience**

- Dishwasher safe metal grease filters

**Technical Information**


- Suitable for ducted or recirculating operation
- Dimensions exhaust air (HxWxD): 799-975 x 600 x 500 mm
- Dimensions recirculating (HxWxD): 799-975 x 600 x 500 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- 220 W total connected load

**Series 2, Wall-mounted canopy  
rangehood, 60 cm, Stainless steel  
DWP66BC50A**

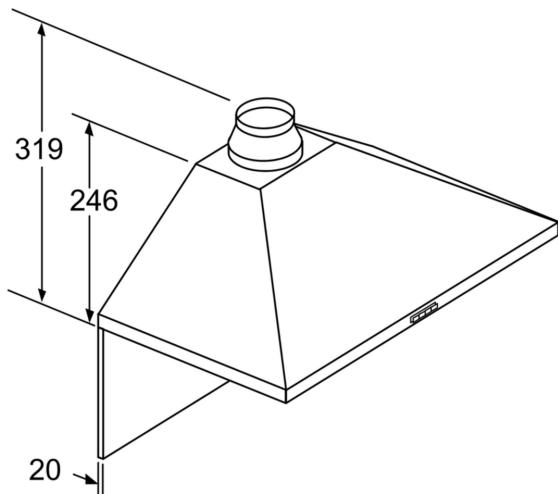

If a back panel is used,  
the design of the appliance  
must be considered. measurements in mm

Measurements in mm

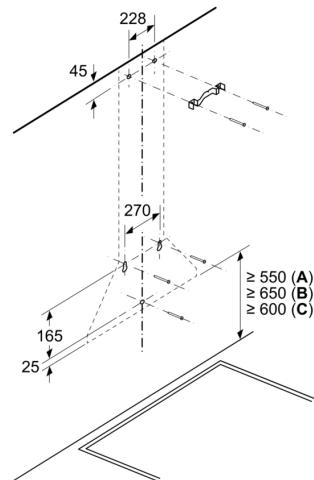


A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand

Measurements in mm

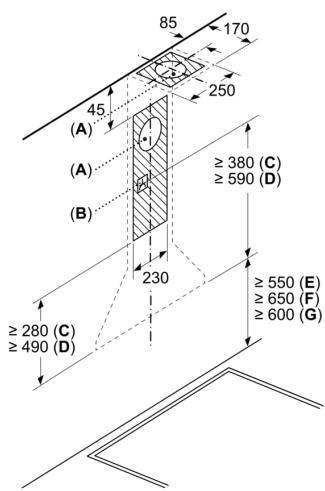

A: Exhaust-air outlet

B: Socket


C: Exhaust air

D: Circulated air

E: Electric

F: Gas - from upper edge of pan support

G: Electric - for Australia and New Zealand

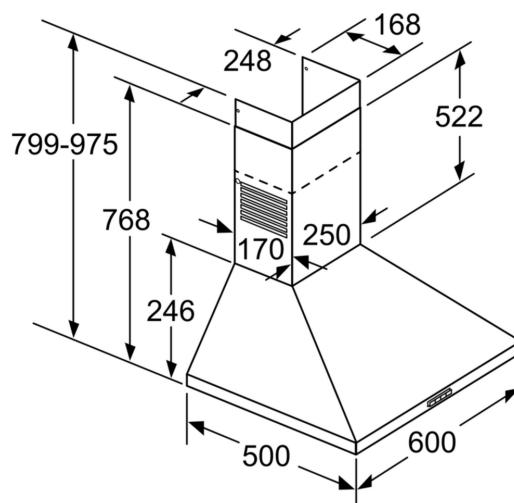

measurements in mm