


Serie | 8, Electric hob, 60 cm,
PKN675DB1A

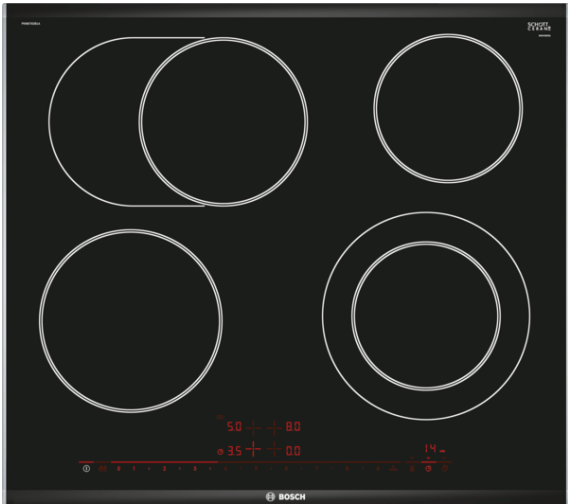

The glass-ceramic radiant cooktop: makes
cooking and cleaning especially easy.

- **DirectSelect Premium:** Direct, simple selection of the desired cooking zone, power and additional functions.
- **RoasterZone:** An extra cooking zone you can switch on for larger cookware e.g. roasters.
- **ComfortProfile:** Elegant and appealing design with bevelled front and metal strips on the side.
- **Timer with switch-off function:** Turns off the assigned cooking zone after the set time.

Technical Data

Product name/family :	Cooking zone ceramic
Construction type :	Built-in
Energy input :	Electric
Total number of positions that can be used at the same time :	4
Required niche size for installation (HxWxD) :	44 x 560-560 x 500-500
Width of the product (mm) :	606
Dimensions of the product (mm) :	44 x 606 x 527
Dimensions of the packed product (HxWxD) (mm) :	100 x 750 x 590
Net weight (kg) :	8.099
Gross weight (kg) :	8.9
Residual heat indicator :	Separate
Location of control panel :	Hob front
Basic surface material :	Ceramic
Color of surface :	Black
Approval certificates :	Australia Standards, CE, VDE
EAN code :	4242002843889
Electrical connection rating (W) :	7500
Voltage (V) :	220-240
Frequency (Hz) :	60; 50



Serie | 8, Electric hob, 60 cm, PKN675DB1A

**The glass-ceramic radiant cooktop: makes
cooking and cleaning especially easy.**

Design

- Stainless steel side trims with bevelled front.
- HighSpeed ceramic glass

Comfort & Convenience

- 4 quick-therm cooking zones:, including:
- 1 dual zone
- 1 with extendable oval zone
- 17 - stage power setting for each cooking zone
- Electronic display

Safety and Environment

- Spill protection
- Power on indicator light
- 2 stage residual heat indicator for each zone
- Childproof lock
- Automatic Safety switch-off
- WipeProtection

Cooktop type and Special Features

- Individual tunable energy consumption display
- Alarm clock
- Keep warm function
- count-up timer, per cooktop

Speed

- Automatic boil start

Dimensions

- Appliance dimensions: (W/D) 606 mm x 527 mm
- Installation dimensions: (ID/W/D) 44 mm x 560 mm x 500 mm
- Min. worktop thickness: 20 mm
- Total connected load: 7500 W