


Series 4, Induction cooktop, 60 cm, surface mount without frame PUJ611BB5H

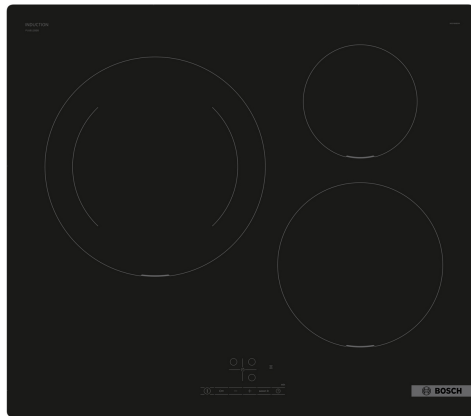

HEZ32WA00 Wireless food thermometer
HEZ9ES100 Espresso maker 4 cups
HEZ9FE280 Iron pan Ø 18 / 28 cm
HEZ9SE030 Set of 2 pots and 1 pan
HEZ9SE060 6 pieces Set

The induction cooktop: fast, safe and energy-efficient cooking that's easy to clean.

- **17 power levels:** Offer precise and flexible heat control for every cooking need.
- **TouchSelect +/-:** Lets you easily select the cooking zone and adjust the power level with simple touch control.
- **Power Boost:** Up to 35% faster heating compared to highest power level.
- **28 cm cooking zone:** Ideal for large pots, pans and cookware.
- **Ceramic glass:** Offers a slim, durable surface that's stylish and easy to clean.

Product name/family: Cooking zone ceramic
Built-in / Free-standing: Built-in
Energy type: Electric
Total number of positions that can be used at the same time: 3
Required niche size for installation (HxWxD): 51 x 560-560 x 490-500 mm
Width of the appliance: 592 mm
Dimensions (HxWxD): 51x592x522 mm
Dimensions of the packed product (HxWxD): 126x753x603 mm
Net weight: 9.7 kg
Gross weight: 11.5 kg
Residual heat indicator: Separate
Location of control panel: Front
Basic surface material: Ceramic
Color of surface: Black
Length electrical supply cord: 110 cm
EAN code: 4242005526543
Voltage: 220-240 V
Frequency: 50; 60 Hz



Series 4, Induction cooktop, 60 cm, surface mount without frame PUJ611BB5H

**The induction cooktop: fast, safe and
energy-efficient cooking that's easy to
clean.**

- 60 cm: space for 3 pots or pans.

Flexibility of cooking zones

- Cooking zone rear left: 280 mm, 2.6 KW (max. power 3.7 KW)
- Cooking zone rear right: 145 mm, 1.4 KW (max power 2.2 KW)
- Cooking zone front right: 210 mm, 2.2 KW (max. power 3.7 KW)

Comfort & Convenience

- TouchSelect electronic control panel: control the power with imprinted +/- touch buttons.
- 17 power levels: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- Switch-off timer: switches off the cooking zone at the end of the time set (e.g. for boiled eggs).
- Count-down timer: an alarm sounds at the end of the time set (e.g. for pasta).

Time saving & Efficiency

- PowerBoost function - reduce the time to heat up large quantities of water: boil water faster with up to 50% more power than at the highest standard level.
- QuickStart: Quick and automatic first pot detection: when switching on, the cooktop automatically selects the cooking zone with cookware on it.
- ReStart function: in case of unintentional switch-off, restore all previous settings by switching on the cooktop again within 4 seconds.
- Quick switch-off: quickly switch off a cooking zone with one longer touch.

Design

- Frameless: slightly raised installation without metal trim.

Safety


- Digital 2 stage residual heat indicator: indicates which cooking zones are still hot or warm.
- Childproof lock: prevent unintended activation of the cooktop.
- Main switch: switch off all cooking zones at the touch of a button.
- Automatic Safety switch-off: for safety reasons, heating stops after a preset time without interaction.

Installation


- Dimensions of the product (HxWxD mm): 51 x 592 x 522
- Required niche size for installation (HxWxD mm) : 51 x 560 x (490 - 500)
- Min. worktop thickness: 16 mm
- Connected load: 4.6 KW
- Power cord: 1.1 m, connected directly
- PowerManagement Function: enables the total power of the cooktop to be limited if necessary (for suitability and installation, consult a licensed electrician).

Series 4, Induction cooktop, 60 cm, surface mount without frame PUJ611BB5H

Measurements in mm

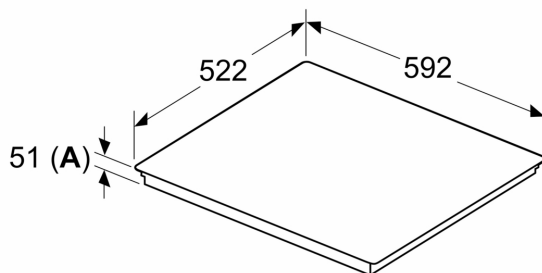

Measurements in mm



A: Min. distance from the hob cut-out to the wall


B: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm

See space requirements for the oven

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required


C	D	E
585-600	50	≥ 35
> 600	≥ 50	≥ 50


A: Recessed depth

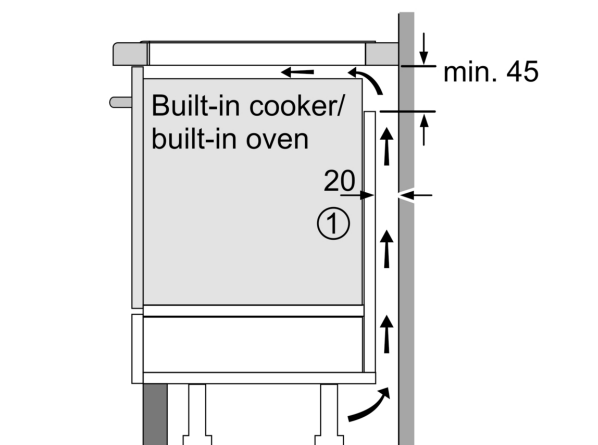

①
Ventilation gap must be present

All measurements in mm

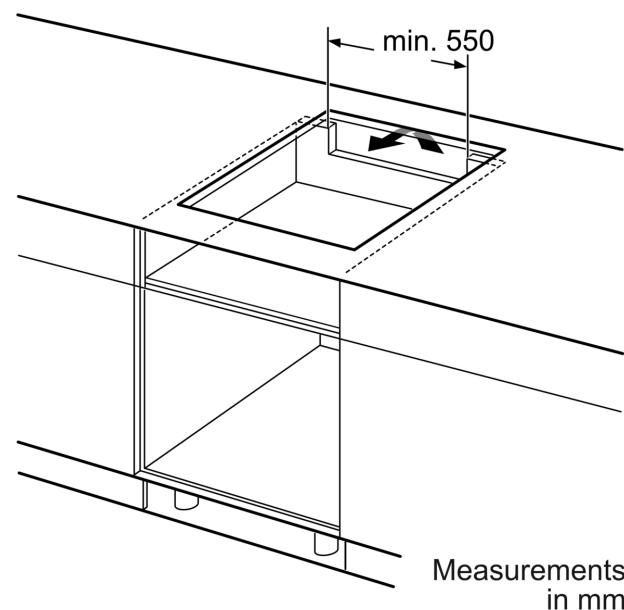

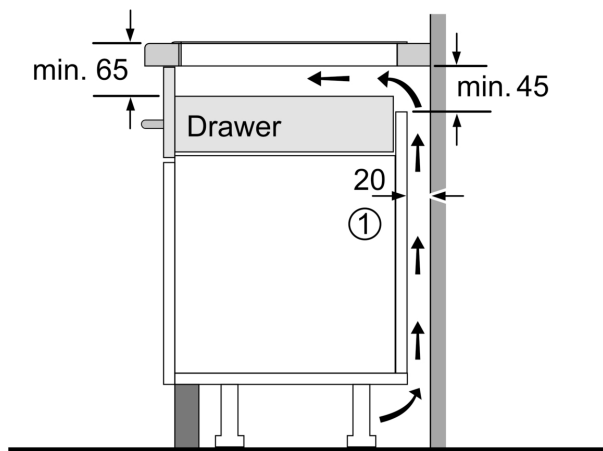

①
Ventilation gap must
be present.

Measurements in mm