

## Serie | 8, Induction hob with integrated ventilation system, 80 cm PXX875D34E



### Optional accessories

HEZ381401 : Exhaust kit  
HEZ381501 : Recirculating kit  
HEZ39050 : Wireless temperature sensor for cooktop  
HEZ9SE030 : Set of 2 Pots and 1 Pan

- **DirectSelect Premium:** Direct, simple selection of the desired cooking zone, power and additional functions.
- **PerfectFry:** For perfect browning of roasted foods thanks to the sensor control with 5 power levels.
- **FlexInduction Zone:** Get more flexibility by combining the cooking zones into one big zone for placing small pots and large cookware.
- **Induction:** Fast, precise cooking, easy cleaning and low energy consumption.
- **PowerBoost:** Up to 50% more power for faster heating.

### Technical Data

|   |                         |
|---|-------------------------|
| Product name/family :                               | Cooking zone ceramic    |
| Construction type :                                 | Built-in                |
| Energy input :                                      | Electric                |
| Required niche size for installation (HxWxD) :      | 198 x 780-780 x 490-500 |
| Width of the appliance :                            | 816                     |
| Dimensions :  | 198 x 816 x 527         |
| Dimensions of the packed product (HxWxD) (mm) :     | 330 x 760 x 940         |
| Net weight (kg) :                                   | 28.644                  |
| Gross weight (kg) :                                 | 34.9                    |
| Residual heat indicator :                           | Separate                |
| Location of control panel :                         | Hob front               |
| Basic surface material :                            | Ceramic                 |
| Color of surface :                                  | Black                   |
| Approval certificates :                             | CE, VDE                 |
| Length electrical supply cord (cm) :                | 110                     |
| Sealed Burners :                                    | No                      |
| heating with booster :                              | All                     |
| Power of 2nd heating element (kW) :                 | 3.3                     |
| :   | 3.7                     |
| Number of speed settings :                          | 9-stage + intensive     |
| Maximum output air extraction (m3/h) :              | 551                     |
| Boost position output recirculating (m3/h) :        | 620.0                   |
| Maximum output recirculating air (m3/h) :           | 557                     |
| Boost position air extraction (m <sup>3</sup> /h) : | 689                     |
| Noise level (dB) :                                  | 70                      |
| Odour filter :                                      | No                      |
| Operating Mode :                                    | Convertible             |
| Delay Shut off modes :                              | 30                      |
| Grease filter type :                                | Kassette                |
| Electrical connection rating (W) :                  | 7400                    |
| Voltage (V) :                                       | 220-240                 |
| Frequency (Hz) :                                    | 50; 60                  |
| Main colour of product :                            | Black                   |
| Approval certificates :                             | CE, VDE                 |
| Length electrical supply cord (cm) :                | 110                     |
| Required niche size for installation (HxWxD) :      | 198 x 780-780 x 490-500 |
| Dimensions :  | 198 x 816 x 527         |
| Dimensions of the packed product (HxWxD) (mm) :     | 330 x 760 x 940         |
| Net weight (kg) :                                   | 28.644                  |
| Gross weight (kg) :                                 | 34.9                    |



4 242002 949574

## Serie | 8, Induction hob with integrated ventilation system, 80 cm PXX875D34E

### Design

- Stainless steel side trims with bevelled front.
- DirectSelect Touch Controls

### Comfort & Convenience

- 4 induction cooking zones
- 2 FlexZones
- 17 power levels
- PowerBoost: rapid heating for large pots of water, automatically turns off right on time to prevent overheating
- 3-steps
- PerfectFry sensor with 5 temperature settings
- PerfectCook sensor ready (sensor sold separately)
- QuickStart: Quick and automatic first pot detection
- ReStart function
- Keep warm function

### Size & Power

- Cooking zones:
  - 1 x Ø400 mmx240 mm, 3.3 KW(max. Power level 3.7 KW)
  - Induction or 2 x Ø 200 mm, 2.2 KW(max. Power level 3.7 KW)
  - Induction;
  - 1 x Ø400 mmx240 mm, 3.3 KW(max. Power level 3.7 KW)
  - Induction or 2 x Ø 200 mm, 2.2 KW(max. Power level 3.7 KW)
  - Induction
- 7.4 KW total connected load
- Voltage: 220 - 240 V

### Safety and Environment

- 2 stage residual heat indicator for each zone
- Automatic pan recognition sensor
  - PowerManagement Function
  - Automatic Safety switch-off
  - Childproof lock
  - WipeProtection
- Spill protection: a built-in overflow container accessed beneath the cooktop that collects any spills that enter the ventilator compartment (can be easily emptied).








### Dimensions

- Appliance measurements (H/W/D): 198 mmx816 mmx527 mm
- Length wire connection: 110 cm

### Ventilation

- Induction/Ventilation Cooktop, Autarkic
- Suitable for ducted or re-circulated extraction (Accessory is required)
- For ducted extraction - accessory kit HEZ381401 required
- For recirculated extraction - accessory kit HEZ381501 required
- 9 fan speed levels plus 1 intensive setting
- Fully-automatic extraction functionality with air quality sensor
- Automatic 30 minutes run-on function
- High-performance EfficientSilentDrive brushless motor (BLDC-technology)
- Cast-iron air inlet grid, heat resistant, dishwasher safe
- Removable and detachable grease filter and liquid collector unit, dishwasher safe
  - integrated stainless steel grease filters, dishwasher safe
  - condensate and liquid collector unit; 200ml capacity; dishwasher safe
- Liquid spillover safety tank, ca. 2.000ml capacity, Twist-off lock, dishwasher safe
- Saturation indicator for grease filter
- Saturation indicator for CleanAir filter
- Extraction rate according to EN 61591:
  - min. Normal use 169 m³/h
  - max. Normal use 551 m³/h
  - Intensive setting 689 m³/h
- Noise level (sound power emissions) based on dB(A)
  - Minimum/Maximum normal use: 42 dB/70 dB(A)
  - Intensive: 75 dB(A)
- Suitable for ducted or recirculated ventilation: An accessory kit is required: HEZ381401 for ducted extraction - HEZ381501 for recirculated extraction.

## Serie | 8, Induction hob with integrated ventilation system, 80 cm PXX875D34E

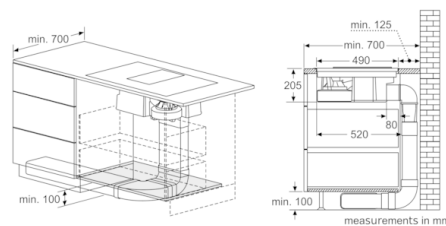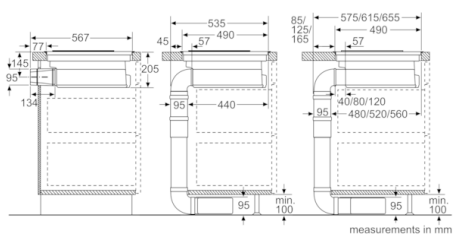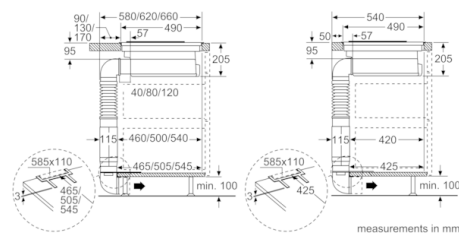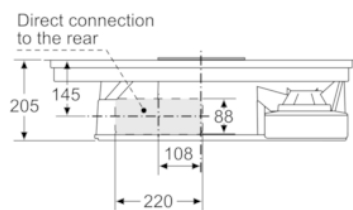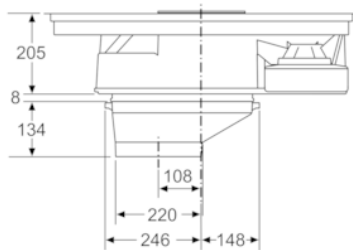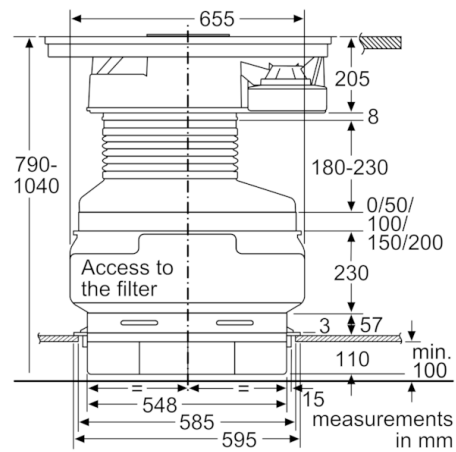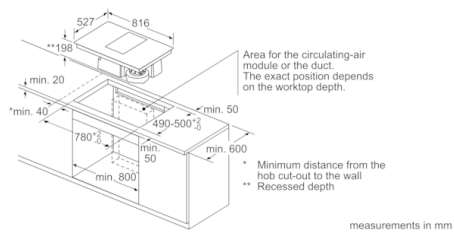

## Serie | 8, Induction hob with integrated ventilation system, 80 cm PXX875D34E

