

## Series 6, Wall-mounted cooker hood, 90 cm, Stainless steel DWB091E50



DHZ1223	Chimney extension 1000 mm
DHZ1233	Chimney extension 1500 mm
DHZ5345	Standard recirculation kit
DHZ5346	Standard odor filter (replacement)
DSZ5201	CleanAir active carbon filter spare part
DSZ6240	CleanAir Recirculation Kit
DZZ0XX0P0	Long Life odor filter (replacement)

## The wall-mounted chimney hood: Mount it on the wall for complete freedom in your kitchen planning

- **Especially quiet:** High performance at just 62 dB
- **Easy-to-clean interior:** hidden screws and cables along with rounded edges make cleaning easy.
- **Eco Silence Drive:** the powerful, energy-saving drive for hoods.
- **Intensive speed setting:** Removes strong kitchen odours quickly and effectively

Typology: .....Wall-mounted  
 Length electrical supply cord: ..... 130.0 cm  
 Height of the chimney: ..... 582-908/582-1018 mm  
 Height of product, without chimney: ..... 46 mm  
 Net weight: ..... 19.0 kg  
 Type of control: .....Electronic  
 Number of speed settings: .....3-stage + 2 intensive  
 Max. air extraction: ..... 620 m<sup>3</sup>/h  
 Boost position output recirculating: ..... 490.0 m<sup>3</sup>/h  
 Max. air recirculation: ..... 410 m<sup>3</sup>/h  
 Boost position air extraction: ..... 980 m<sup>3</sup>/h  
 Number of lights: ..... 3  
 Noise level: ..... 62 dB(A) re 1 pW  
 Diameter of air outlet: ..... 150 / 120 mm  
 Grease filter material: ..... Washable stainless steel  
 Odour filter: ..... No  
 Operating Mode: .....Convertible  
 Optional accessories: ..... DHZ1223, DHZ1233, DHZ5345, DHZ5346, DSZ5201, DSZ6240, DZZ0XX0P0  
 Type of lamps used: ..... LED  
 Total power of the lamps: ..... 9 W  
 Grease filter type: .....Kassette  
 Connection rating: ..... 269 W  
 Fuse protection: .....10 A  
 Voltage: ..... 220-240 V  
 Frequency: ..... 50; 60 Hz  
 Plug type: ..... Gardy plug w/ earthing  
 Installation typology: .....Wall-mounted  
 Material body: ..... Stainless steel  
 Plug type: ..... Gardy plug w/ earthing  
 Dimensions of the product, with chimney (if exists) (in): .....x x  
 Dimensions of the packed product: ..... 23.03 x 25.59 x 38.18  
 Net weight: ..... 42.000 lbs  
 Gross weight: ..... 55.000 lbs  
 Motor location: ..... Integrated motor in hood chimney  
 No-return airflow flap: ..... Yes  
 Length electrical supply cord: ..... 130.0 cm  
 Dimensions of the product, with chimney (if exists): ..... 628-1064 x 900.0 x 500.0 mm  
 Dimensions of the packed product (HxWxD): ..... 585 x 650 x 970 mm  
 Net weight: ..... 19.0 kg  
 Gross weight: ..... 24.8 kg  
 Delay Shut off modes: ..... 10 min



## **Series 6, Wall-mounted cooker hood, 90 cm, Stainless steel DWB091E50**

### **The wall-mounted chimney hood: Mount it on the wall for complete freedom in your kitchen planning**

---

#### **Performance**

- Suitable for ducted or recirculating operation
- Max. extraction rate according to EN 61591: 980 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 62 dB(A) re 1 pW (48dB(A) re 20 µPa sound pressure)
- Intensive: 73 dB(A) re 1 pW (59 dB(A) re 20 µPa sound pressure)

#### **Key Functions**

- Twin channel high performance fan motor
- Push button controls with digital display
- 3 fan speeds setting plus 2 intensive
- 3 removable metal grease filters
- 3 x LED 3W
- Dimmer function

#### **Features**

- Automatic intensive revert after 6 min.
- Automatic run on for 10 min.

#### **Design**

- Wall mounted hood
- electronic controls via Push button controls with digital display


#### **Environment and safety:**

- Removable metal grease filter, dishwasher safe

#### **Technical information:**

- Dimensions exhaust air (HxWxD mm): 628-954 x 900 x 500
- Dimensions recirculating (HxWxD mm): 628-1064 x 900 x 500
- Electrical connection rating: 269 W

**Series 6, Wall-mounted cooker hood,  
90 cm, Stainless steel  
DWB091E50**

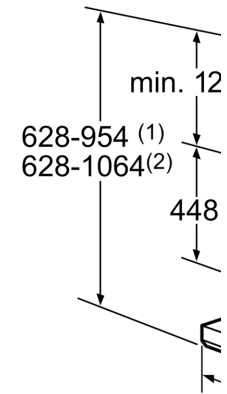

- (1) Exhaust air
- (2) Circulated air
- (3) Air outlet - Filter exhaust air sl

