

Series 8, Wall-mounted cooker hood, 90 cm, Stainless steel DWB91PR50A



DHZ1223	Chimney extension 1000 mm
DHZ1233	Chimney extension 1500 mm
DWZ0XX0J5	Long Life recirculation kit
DWZ1CX1I6	Clean Air Plus recirculation kit
DWZ2CB1I4	Clean Air Standard recirculation kit
DWZ2CX5C6	Clean Air Plus recirc. kit external
DWZ2FX5D1	Long Life recirculation kit external
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)
DZZ2CB1B4	Clean Air Standard odor filter (repl.)

The wall-mounted chimney hood: Mount it on the wall for complete freedom in your kitchen planning

- **PerfectAir sensor:** enjoy quieter, odour-free cooking.
- **Silence:** maximal extractor performance with little noise
- **LED Illumination:** The energy-saving lighting provides white and good lighting for the hob area.
- **Easy-to-clean interior:** hidden screws and cables along with rounded edges make cleaning easy.

Color chimney: Stainless steel
 Typology: Wall-mounted
 Length electrical supply cord: 130 cm
 Height of the chimney: 582-908/568-1018 mm
 Height of product, without chimney: 46 mm
 Net weight: 19.0 kg
 Type of control: Electronic
 Number of speed settings: 3-stage + 2 intensive
 Max. air extraction: 602 m³/h
 Boost position output recirculating: 561 m³/h
 Max. air recirculation: 462 m³/h
 Boost position air extraction: 965 m³/h
 Number of lights: 3
 Noise level: 64 dB(A) re 1pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material: Washable stainless steel
 Odour filter: No
 Operating Mode: Convertible
 Optional accessories: DHZ1223, DHZ1233, DWZ0XX0J5, DWZ1CX1I6, DWZ2CB1I4, DWZ2CX5C6, DWZ2FX5D1, DZZ0XX0P0, DZZ1XX1B6, DZZ2CB1B4
 Type of lamps used: LED
 Grease filter type: Kasette
 Clean filter reminders: Yes
 Connection rating: 265 W
 Fuse protection: 10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type: AU plug
 Installation typology: Wall-mounted
 Material body: Stainless steel
 Plug type: AU plug
 Dimensions of the product, with chimney (if exists) (in): x x
 Dimensions of the packed product: 23.03 x 25.59 x 38.18
 Net weight: 42.000 lbs
 Gross weight: 57.000 lbs
 Motor location: Integrated motor in hood chimney
 No-return airflow flap: Yes
 Length electrical supply cord: 130 cm
 Dimensions of the product, with chimney (if exists): 614-1064 x 898.0 x 500.0 mm
 Dimensions of the packed product (HxWxD): 585 x 650 x 970 mm
 Net weight: 19.0 kg
 Gross weight: 25.7 kg



4 242005 107742

Series 8, Wall-mounted cooker hood, 90 cm, Stainless steel DWB91PR50A

**The wall-mounted chimney hood: Mount it
on the wall for complete freedom in your
kitchen planning**

Design

- Box brand design
- 90 cm Chimney hood, Stainless Steel

Technical information:

- 3 fan speeds setting plus 2 intensive
- Extraction rate according to EN 61591 max. 965 m³/h
- Extraction rate in recirculation mode:
 - Max. normal use: 471 m³/h
- Suitable for ducted or recirculating operation
- Recirc. kit or clean air kit
- electronic controls via TouchControl with lightline
- air quality sensor 1.1
- Automatic run on for 1-9 min
- Noise max. Normal Level: 64 dB*
- Noise level in recirculation mode:
 - Max. normal use: 72 dB(A) re 1 pW (60 dB(A) re 20 µPa sound pressure)
- Energy Efficiency Class: A+
- Electrical connection rating: 265 W

Comfort


- with one-way flap
- Removable metal grease filter, dishwasher safe
- Saturation indicator for metal and charcoal filter
- Automatic intensive revert after 6 min
- Automatic run on for 10 min.
- 3 x LM3-01_LED_1,5W
- Dimmer function

Measures:


- 90 cm wide
- Dimensions exhaust air (HxWxD mm): 614-954 x 898 x 500
- Dimensions recirculating (HxWxD mm): 614-1064 x 898 x 500
- Dimensions recirculating with CleanAir module (HxWxD mm):
 - 689 x 898 x 500- mounting with outer chimney
 - 795-1139 x 898 x 500 - mounting with telescopic chimney
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.3 m

**Series 8, Wall-mounted cooker hood,
90 cm, Stainless steel
DWB91PR50A**


measurements in mm

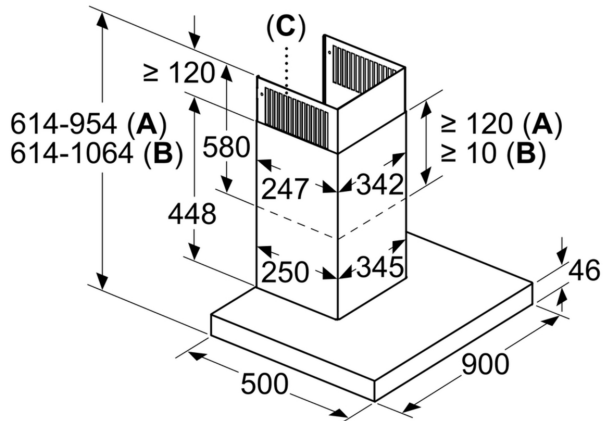

- A:** Air extraction
B: Air recirculation
C: Air outlet – slots for exhaust air to be mounted facing down

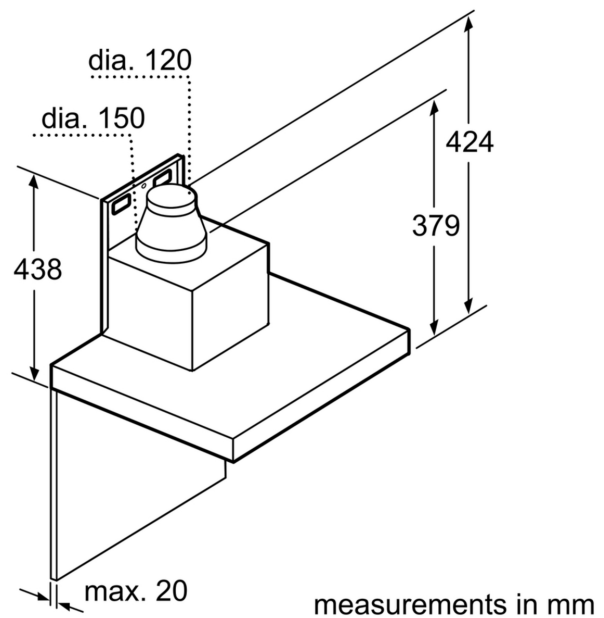


Measurements in mm

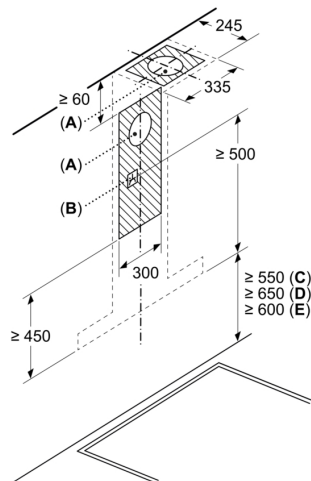

- A:** Exhaust air outlet
B: Socket
C: Electric
D: Gas - from upper edge of pan support
E: Electric - for Australia and New Zealand

Measurements in mm

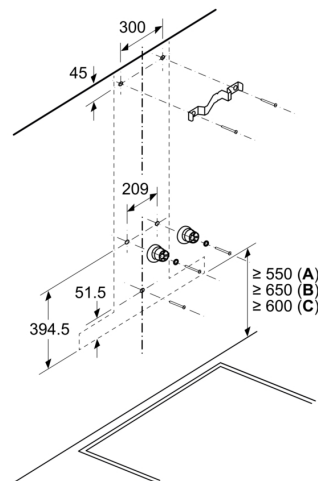

- A:** Electric
- B:** Gas - from upper edge of pan support
- C:** Electric - for Australia and New Zealand