

Series 6, Wall-mounted cooker hood, 60 cm, clear glass black printed DWK68AK60T



DWZ0GK0A0 Active carbon filter

The wall-mounted chimney hood: Mount it on the wall for complete freedom in your kitchen planning

- **Especially quiet:** High performance at just 62 dB
- **Intensive speed setting:** Removes strong kitchen odours quickly and effectively
- **Metal Grease Filter:** cleans the air, captures grease, easy monthly clean-up.
- **Converts to Recirculation Mode with Accessory Kit (Separate Purchase Required)**

Typology:	Wall-mounted
Length electrical supply cord:	200.0 cm
Height of product, without chimney:	415 mm
Net weight:	17.2 kg
Type of control:	Electronic
Number of speed settings:	3-stages + intensive setting
Max. air extraction:	578 m³/h
Boost position output recirculating:	333.0 m³/h
Max. air recirculation:	333 m³/h
Boost position air extraction:	750 m³/h
Number of lights:	2
Noise level:	65 dB(A) re 1pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable aluminium
Odour filter:	No
Operating Mode:	Convertible
Optional accessories:	DWZ0GK0A0
Type of lamps used:	LED
Grease filter type:	Kassette
Connection rating:	281 W
Voltage:	220-240 V
Frequency:	50 Hz
Plug type:	Gardy plug w/ earthing
Installation typology:	Wall-mounted
Plug type:	Gardy plug w/ earthing
Dimensions of the product, with chimney (if exists) (in):	x x
Dimensions of the packed product:	18.89 x 21.06 x 29.33
Net weight:	38.000 lbs
Gross weight:	45.000 lbs
Motor location:	Integrated motor in hood body
No-return airflow flap:	No
Length electrical supply cord:	200.0 cm
Dimensions of the product, with chimney (if exists):	x 596.0 x 403.0 mm
Dimensions of the packed product (HxWxD):	480 x 535 x 745 mm
Net weight:	17.2 kg
Gross weight:	20.2 kg



4 242005 136346

Series 6, Wall-mounted cooker hood, 60 cm, clear glass black printed DWK68AK60T

**The wall-mounted chimney hood: Mount it
on the wall for complete freedom in your
kitchen planning**

- 60 cm Inclined Hood Hood, Silver metallic
- 60 cm wide
- black with glass canopy
- Suitable for ducted or recirculating operation
- TouchControl with Electronic display
- electronic controls via TouchControl with Electronic display
- 3 speeds plus intensive setting
- 2 x LED 3W
- Rim extraction
- Removable metal grease filter, dishwasher safe
- Max. extraction rate according to EN 61591: 750 m³/h
- Dimensions exhaust air (HxWxD): 800 - 1080 x 596 x 403 mm
- Dimensions recirculating (HxWxD): 860 - 1080 x 596 x 403 mm
- Electrical connection rating: 281 W
- Wall mounted hood
- Recirculating kit

Variant:

Design

Technical information:

Performance

Key Functions

Environment and safety:

Comfort:


Measures:

Technical information:


- Rim ventilation
- Twin channel high performance fan motor
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)

**Series 6, Wall-mounted cooker hood,
60 cm, clear glass black printed
DWK68AK60T**

Measurements in mm

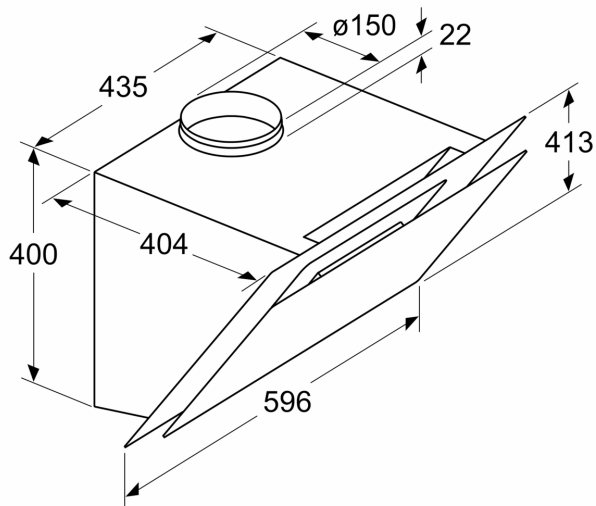

Measurements in mm

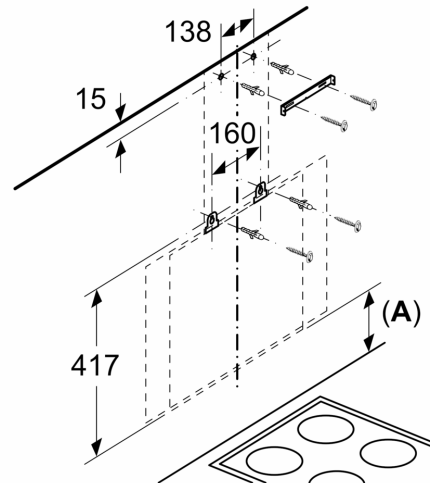

A: Min. 470 mm electric / min. 570 mm gas,
from upper edge of pan support

