

Series 4, Induction hob, 60 cm, surface mount without frame PUE612BB1J



Optional accessories

HEZ32WA00 : Wireless food thermometer
HEZ390090 : Wok Set consisting of 3 Items
HEZ9SE030 : Set of 2 pots and 1 pan

The induction hob: cook fast, clean and safely while using very little energy.

- **17 Power Levels:** offers a variety of cooking options with different heat levels for every need.
- **Touch Select:** selection of the desired cooking zone and easy setting of the desired power level.
- **Power Boost:** up to 35% faster heating compared to highest power level.
- **Quick Start:** start straight away and select the desired cooking level.
- **Restart:** restores hob settings in case of an unintentional hob switch-off.

Technical Data

Product name/family : Cooking zone ceramic
Built-in / Free-standing : Built-in
Energy input : Electric
Total number of positions that can be used at the same time : 4
Required niche size for installation (HxWxD) : 51 x 560-560 x 490-500 mm
Width of the appliance : 592 mm
Dimensions : 51x592x522 mm
Dimensions of the packed product (HxWxD) : 130x750x600 mm
Net weight : 10.4 kg
Gross weight : 11.5 kg
Residual heat indicator : Separate
Location of control panel : Front
Basic surface material : Ceramic
Color of surface : Azurish white
Length electrical supply cord : 110 cm
Sealed Burners : No
heating with booster : All
Power of heating element (kW) : 1800.0 W
Power of 3rd heating element (kW) : 1800.0 W
Power of 5th heating element (kW) : 1400.0 W
Power of heating element (kW in boost) : [3.0] kW
Power of 3rd heating element (kW in boost) : [3.0] kW
Power of 5th heating element (kW in boost) : [2.2] kW
Connection Rating : 3000 W
Voltage : 220-240 V
Frequency : 50; 60 Hz
Energy input : Electric
Plug type : GARDY plug w/ earthing
Appliance Dimensions (h x w x d) (in) : x x
Dimensions of the packed product : 5.11 x 23.62 x 29.52
Net weight : 23.000 lbs
Gross weight : 25.000 lbs



Series 4, Induction hob, 60 cm, surface mount without frame PUE612BB1J

The induction hob: cook fast, clean and safely while using very little energy.

Installation

- Dimensions of the product (HxWxD mm): 51 x 592 x 522
- Required niche size for installation (HxWxD mm) : 51 x 560 x (490 - 500)
- Min. worktop thickness: 16 mm
- Connected load: 3 KW
- PowerManagement Function: limit the maximum power if needed (depends on fuse protection of electric installation).

- 60 cm: space for 4 pots or pans.

Flexibility of cooking zones

- Cooking zone front left: 180 mm, 1.8 KW (max. power 3 KW)
- Cooking zone rear left: 180 mm, 1.8 KW (max. power 3 KW)
- Cooking zone rear right: 145 mm , 1.4 KW (max power 2.2 KW)
- Cooking zone front right: 210 mm, 2.2 KW (max. power 3 KW)

Usage convenience

- TouchSelect control panel: control the power with imprinted +/- touch buttons.
- Variable 17-stage power settings for each zone: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).

Time saving & efficiency

- Boost function for all zones: boil water more quickly thanks to 50% more energy than at the highest standard level.
- QuickStart Function: when switching on, the hob automatically selects the cooking zone with cookware (placed in off-mode).
- ReStart Function: in case of unintentional switch-off, restore all previous settings by switching on the hob again within 4 seconds.

Design

- frameless


Safety

- 2 stage residual heat indicator: indicates which cooking zones are still hot or warm.
- Childproof lock: prevent unintended activation of the hob.
- Main on/off switch: switch off all cooking zones at the touch of a button.
- Safety switch-off: for safety reasons, heating stops after a preset time without interaction (customizable).

Series 4, Induction hob, 60 cm, surface mount without frame

PUE612BB1J



measurements in mm




- A:** Minimum distance from the hob cut-out to the wall.
B: Recessed depth.
C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50

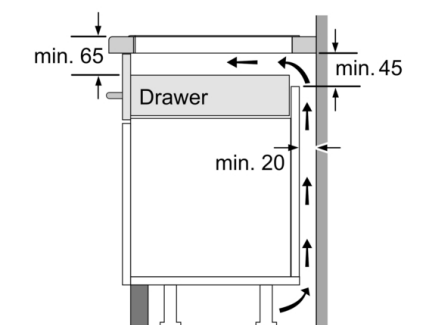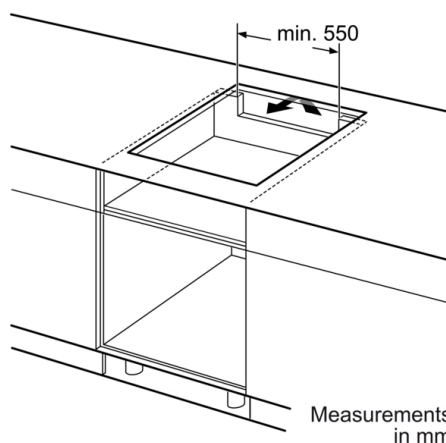

Measurements in mm

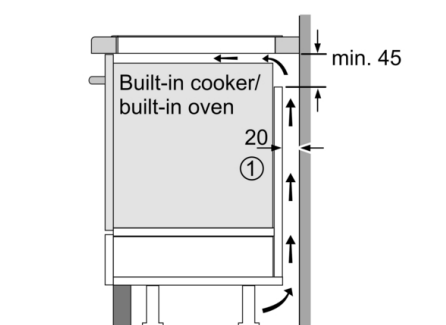

① Ventilation gap must be present

All measurements in mm