

Series 2, canopy cooker hood, 53 cm, Anthracite DLN53AA70



DWZ0IN0A0 Standard odor filter (replacement)
DWZ0IN0T0 Standard recirculation kit

Canopy cooker hoods are designed to be fully integrated for more flexibility when planning your kitchen.

- **Silence:** maximal extractor performance with little noise

Typology: Built-in/Built-under
Length electrical supply cord: 150.0 cm
Required niche size for installation (HxWxD): ... 208mm x 493.0mm x 257mm mm
Net weight: 5.8 kg
Type of control: mechanical
Number of speed settings: 3
Maximum output air extraction: 302 m³/h
Maximum output recirculating air: 300 m³/h
Number of lights: 2
Noise level: 62 dB(A) re 1pW
Diameter of air outlet: 120 mm
Grease filter material: Washable aluminium
Odour filter: No
Operating Mode: Convertible
Optional accessories: DWZ0IN0A0, DWZ0IN0T0
Type of lamps used: Not applicable
Total power of the lamps: 6 W
Grease filter type: Kasette
Clean filter reminders: No
Connection Rating: 121 W
Fuse protection: KSA A
Voltage: 220-240 V
Frequency: 50 Hz
Plug type: Gardy plug w/ earthing
Installation typology: Built-in
Material body: Lacquered
Plug type: Gardy plug w/ earthing
Dimensions of the product, with chimney (if exists) (in): x x
Dimensions of the packed product: 9.84 x 24.01 x 14.17
Net weight: 13.000 lbs
Gross weight: 15.000 lbs
Motor location: Integrated motor in hood body
No-return airflow flap: Yes
Length electrical supply cord: 150.0 cm
Dimensions of the product, with chimney (if exists): .x 534.0 x 300.0 mm
Dimensions of the packed product (HxWxD): 250 x 610 x 360 mm
Net weight: 5.8 kg
Gross weight: 7.0 kg



4 242005 095476

Series 2, canopy cooker hood, 53 cm, Anthracite DLN53AA70

Canopy cooker hoods are designed to be fully integrated for more flexibility when planning your kitchen.

- Energy Efficiency Class: D*
- Average Energy Consumption: 67.7 kWh/year*
- Blower Efficiency Class: E*
- Lighting Efficiency Class: D*
- Grease Filtering Efficiency Class: D*
- Noise min./max. Normal Level: 46/62 dB*

Model:

Design

Technical Information

Environment and safety:

Comfort:


Measures:

- 90 cm Canopy hood, Stainless Steel
- Suitable for ducted or re-circulated extraction
- Recirculating kit
- Sliding switch control for extractor speeds and light
- 3 fan speeds
- Single motor
- Metal grease filter, dishwasher safe
- 2 x 4 W LED 3W E14
- Light Intensity: 78 lux
- Colour Temperature: 2700 K
- Extraction rate according to EN 61591: max. 302 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 62 dB(A) re 1 pW (48 dB(A) re 20 µPa sound pressure)
- Max. extraction rate: 302 m³/h
- Appliance dimensions (HxWxD): 208 x 534 x 300 mm
- Built-in dimensions (HxWxD): 208 x 493 x 257 mm
- Power rating: 121 W
- 120 mm diameter pipe
- with one-way flap


Technical Information

* In accordance with the EU-Regulation No 65/2014


**Series 2, canopy cooker hood, 53 cm,
Anthracite
DLN53AA70**

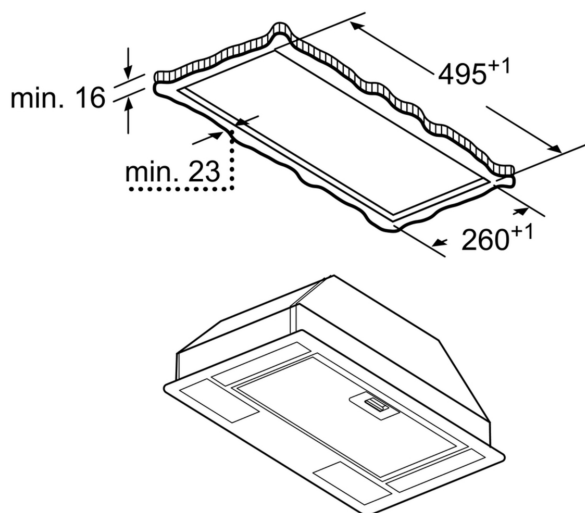


measurements in mm

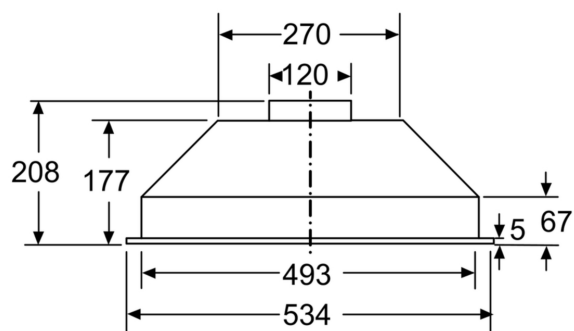

measurements in mm

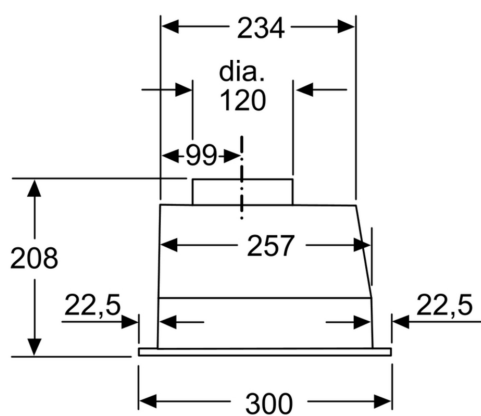

measurements in mm

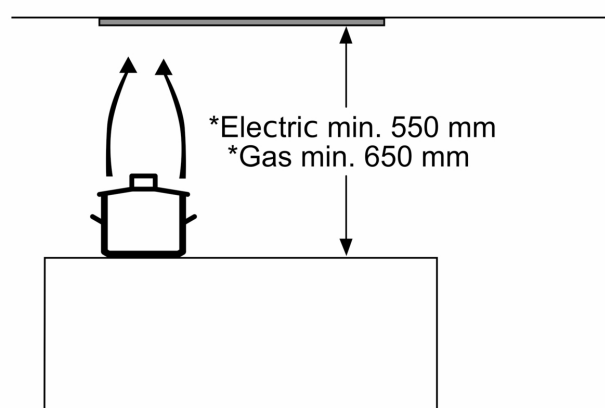

* from upper edge of
pan support

*Electric min. 550 mm
*Gas min. 650 mm

measurements in mm