

Series 2, wall-mounted cooker hood, 90 cm, Stainless steel DWB96BC50



DHZ1225 Chimney extension 1000 mm, DHZ1235 Chimney extension 1500 mm, DHZ9550 Brushed steel back panel, DHZ9551 Brushed steel back panel, DWZ0XX0J0 Long Life recirculation kit, DWZ1DX1B4 Clean Air Standard odor filter (repl.), DWZ1DX1I4 Clean Air Standard recirculation kit, DWZ1DX1I6 Clean Air Plus recirculation kit, DWZ1FX5C6 Clean Air Plus recirc. kit external, DWZ1FX5D1 Long Life recirculation kit external, DZZ0XX0P0 Long Life odor filter (replacement), DZZ1XX1B6 Clean Air Plus odor filter (replacement), HEZG9AS00S Adapter

Box-design hood: performance and matching kitchen design bundled in one hood.

Color chimney: Stainless steel
 Typology: Wall-mounted
 Length electrical supply cord: 130.0 cm
 Height of the chimney: 583-912/583-1022 mm
 Height of product, without chimney: 53 mm
 Net weight: 13.0 kg
 Type of control: mechanical
 Number of speed settings: 3
 Maximum output air extraction: 619 m³/h
 Maximum output recirculating air: 422 m³/h
 Number of lights: 2
 Noise level: 70 dB(A) re 1pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material: Washable aluminium
 Odour filter: No
 Operating Mode: Convertible
 Optional accessories: DHZ1225, DHZ1235, DHZ9550, DHZ9551, DWZ0XX0J0, DWZ1DX1B4, DWZ1DX1I4, DWZ1DX1I6, DWZ1FX5C6, DWZ1FX5D1, DZZ0XX0P0, DZZ1XX1B6, HEZG9AS00S
 Type of lamps used: LED
 Grease filter type: Kassette
 Clean filter reminders: No
 Connection Rating: 220 W
 Fuse protection: 10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type: Gardy plug w/ earthing
 Installation typology: Wall-mounted
 Material body: Stainless steel
 Plug type: Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in): x x
 Dimensions of the packed product: 19.29 x 25.59 x 40.55
 Net weight: 29.000 lbs
 Gross weight: 40.000 lbs
 Motor location: Integrated motor in hood chimney
 No-return airflow flap: Yes
 Length electrical supply cord: 130.0 cm
 Dimensions of the product, with chimney (if exists): 635-1075 MM x 900.0 x 500.0 mm
 Dimensions of the packed product (HxWxD): ... 490 x 650 x 1030 mm
 Net weight: 13.0 kg
 Gross weight: 18.2 kg



4 242005 036097

Series 2, wall-mounted cooker hood, 90 cm, Stainless steel DWB96BC50

Box-design hood: performance and matching kitchen design bundled in one hood.

Design

- 90 cm Wall hood, Stainless Steel
- Appliance colour: brushed steel
- push buttons for extractor speeds and light

Performance

- 3 fan speeds
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 70 dB(A) re 1 pW (57 dB(A) re 20 µPa sound pressure)

Comfort:


- Twin channel high performance fan motor
- Capacitor energy efficient
- 2 x 1.5W LED
- Light Intensity: 91 lux
- Colour Temperature: 3500 K
- Metal grease filter, dishwasher safe
- Energy Efficiency Class: B*
- Average Energy Consumption: 47.4 kWh/year*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Noise min./max. Normal Level: 49/70 dB*

Technical Information

- Wall mounted hood
- 90 cm Chimney hood
- Suitable for ducted or re-circulated extraction
- Recirc. kit or clean air kit
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- with one-way flap
- Dimensions exhaust air (HxWxD): 635-965 x 900 x 500 mm
- Dimensions recirculating (HxWxD): 635-1075 x 900 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD): 703 x 900 x 500mm - mounting with outer chimney
- Power rating: 220 W
- Electrical cable length 1.3 m


* In accordance with the EU-Regulation No 65/2014

Series 2, wall-mounted cooker hood, 90 cm, Stainless steel DWB96BC50

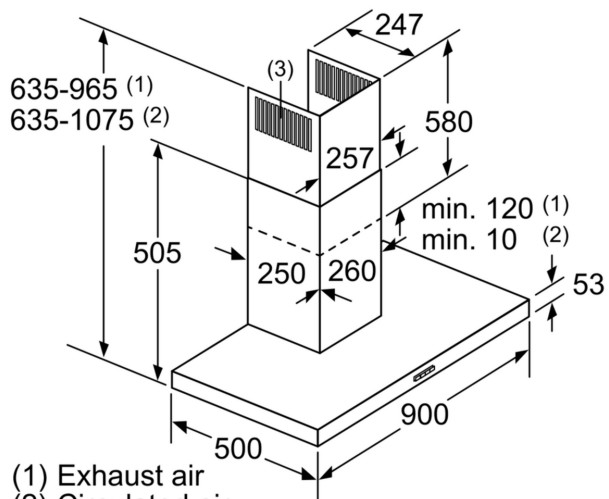

- (1) Exhaust air
(2) Circulated air
(3) Air outlet – slots for exhaust air to be mounted facing down


measurements in mm

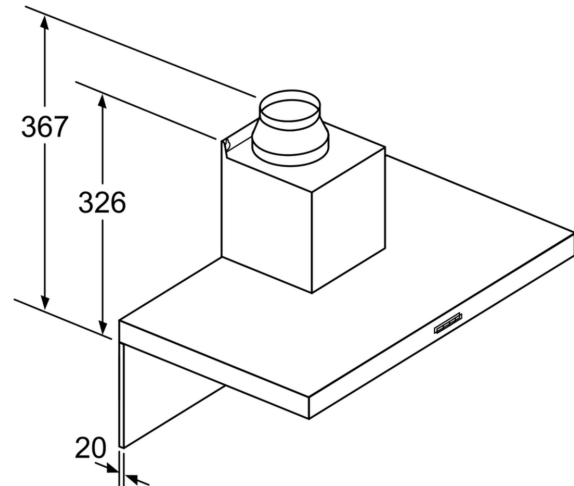

If a back panel is used,
the design of the appliance
must be considered.


measurements in mm

Measurements in mm

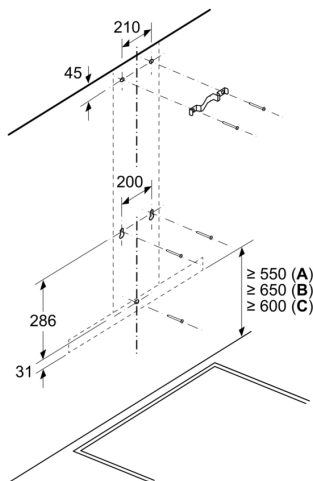

- A: Electric
B: Gas - from upper edge of pan support
C: Electric - for Australia and New Zealand

Measurements in mm

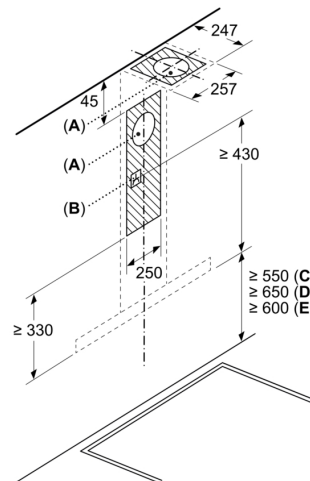

- A: Exhaust air outlet
B: Socket
C: Electric
D: Gas - from upper edge of pan support
E: Electric - for Australia and New Zealand