

Series 8, wall-mounted cooker hood, 90 cm, clear glass black printed, Black DWK91LT60



- **EcoSilence Drive:** the powerful, energy-saving drive for hoods.
- **Home Connect:** control your hood via the app.
- **Favourite Button:** customize your hood settings for a unique, personalized cooking experience.
- **Performance profiles:** personalize your hood's performance for a tailored cooking experience.
- **Illuminate your cooking area as you wish with adjustable brightness of the light.**

DWZ0BX6K1	Chimney extension 1000 mm
DWZ0BX6L1	Chimney extension 1500 mm
DWZ1BK1B6	Clean Air Plus odor filter (replacement)
DWZ1BK1I6	Clean Air Plus recirculation kit
DWZ1BK1P1	Long Life odor filter (replacement)
DWZ1BK1R1	Long Life recirculation kit (chimless)
DWZ1BK1S1	Long Life recirculation kit
DWZ1BK1V6	Clean Air Plus recirc. kit (chimless)
HEZG9AS00S	Adapter

Color chimney:	Black
Typology:	Wall-mounted
Length electrical supply cord:	130 cm
Height of the chimney:	420-663/457-750 mm
Height of product, without chimney:	450 mm
Net weight:	26.0 kg
Type of control:	Electronic
Number of speed settings:	3-stage + 2 intensive
Maximum output air extraction:	441 m³/h
Boost position output recirculating:	944 m³/h
Maximum output recirculating air:	437 m³/h
Boost position air extraction:	1007 m³/h
Number of lights:	2
Noise level:	51 dB(A) re 1pW
Diameter of air outlet:	150 mm
Grease filter material:	Washable stainless steel
Odour filter:	No
Operating Mode:	Convertible
Optional accessories:	DWZ0BX6K1, DWZ0BX6L1, DWZ1BK1B6, DWZ1BK1I6, DWZ1BK1P1, DWZ1BK1R1, DWZ1BK1S1, DWZ1BK1V6, HEZG9AS00S
Type of lamps used:	Not applicable
Grease filter type:	Kassette
Clean filter reminders:	Yes
Connection Rating:	250 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50; 60 Hz
Plug type:	Gardy plug w/ earthing
Installation typology:	Wall-mounted
Material body:	Glass, Lacquered
Plug type:	Gardy plug w/ earthing
Dimensions of the product, with chimney (if exists) (in):	x x
Dimensions of the packed product:	30.31 x 28.74 x 48.42
Net weight:	57.000 lbs
Gross weight:	82.000 lbs
Motor location:	Integrated motor in hood body
No-return airflow flap:	Yes
Length electrical supply cord:	130 cm
Dimensions of the product, with chimney (if exists):	770 x 900 x 447.0 mm
Dimensions of the packed product (HxWxD):	770x730x1230 mm
Net weight:	26.0 kg
Gross weight:	37.0 kg




4 242005 307401

Series 8, wall-mounted cooker hood, 90 cm, clear glass black printed, Black DWK91LT60


- Inclined glass brand design
- clear glass black printed
- Suitable for ducted or re-circulated extraction
- In recirculation operation chimless use possible
- BLDC for Ventilation
- Colour Temperature: 3500 K
- Light Intensity: 422 lux
- 3 fan speeds setting plus 2 intensive
- grease- and charcoal filter
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- easy to clean yes
- Energy Efficiency Class: A+*
- Average Energy Consumption: 39.1 kWh/year*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Power rating: 250 W
- Voltage: 220 - 240 V
- Dimensions exhaust air (HxWxD): 855-1098 x 890 x 447 mm
- Dimensions recirculating (HxWxD): 892-1185 x 890 x 447 mm
- Electrical cable lenght 1.3 m
- with one-way flap

**Series 8, wall-mounted cooker hood,
90 cm, clear glass black printed,
Black
DWK91LT60**


Measurements in mm
Appliance in exhaust air mode

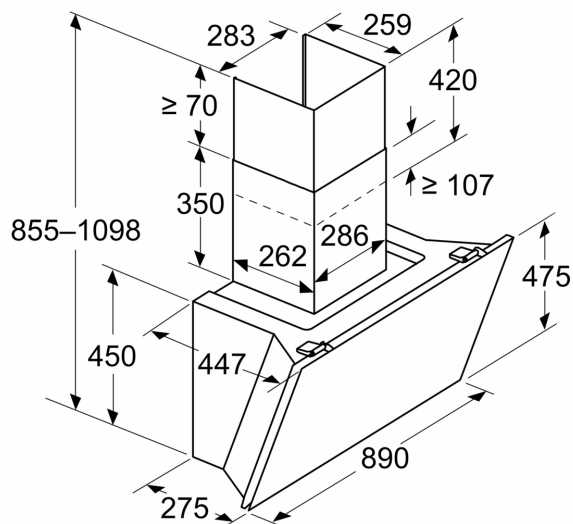

Measurements in mm
Appliance in circulated air mode

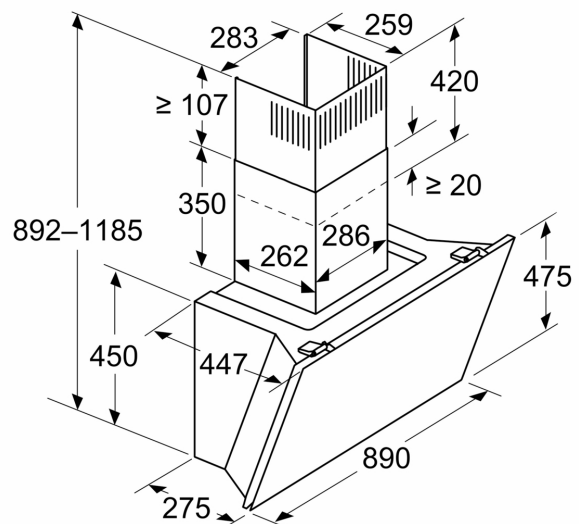


Measurements in mm
Appliance in circulated air mode without duct



Socket can be fitted to the side of or above the appliance


A: Socket only outside the marked area

Measurements in mm

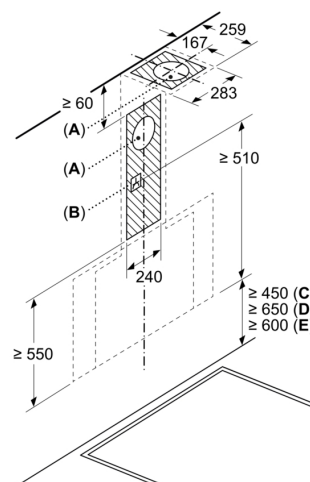


- A:** Exhaust-air outlet
- B:** Socket
- C:** Electric
- D:** Gas - from upper edge of pan support
- E:** Electric - for Australia and New Zealand

Measurements in mm
Wall installation with chimney

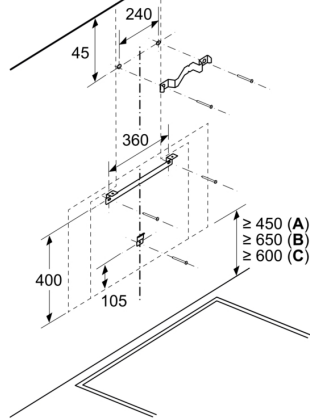


- A:** Electric
B: Gas - from upper edge of pan support
C: Electric - for Australia and New Zealand

Measurements in mm

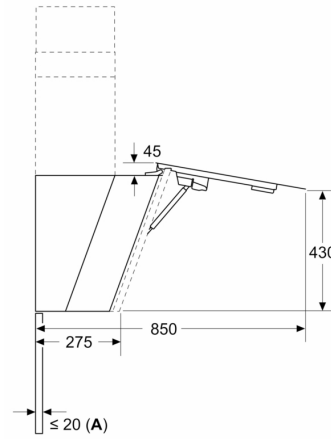

- A:** Max. back wall thickness

Measurements in mm

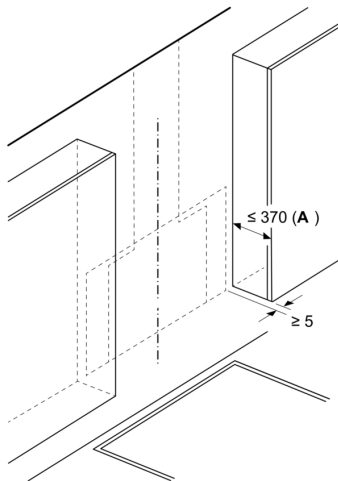

- A:** Max. depth of side upper cabinets (incl. door) due to installation of glass plate

Appliance must be installed before upper cabinets, if these are deeper than 370 mm