

## Series 6, Wall-mounted cooker hood, 90 cm, Black glass canopy DWK97JM60



|            |                                          |
|------------|------------------------------------------|
| DWZ0AK0R0  | Long Life recirculation kit (chimless)   |
| DWZ0AK0S0  | Long Life recirculation kit              |
| DWZ0AX5K0  | Chimney extension 1000 mm                |
| DWZ0AX5L0  | Chimney extension 1500 mm                |
| DWZ1AK1B6  | Clean Air Plus odor filter (replacement) |
| DWZ1AK1I6  | Clean Air Plus recirculation kit         |
| DWZ1AK1V6  | Clean Air Plus recirc. kit (chimless)    |
| DWZ1AX5C6  | Clean Air Plus recirc. kit external      |
| DWZ1AX6E1  | Chimney standard black                   |
| DZZ0XX0P0  | Long Life odor filter (replacement)      |
| DZZ1XX1B6  | Clean Air Plus odor filter (replacement) |
| HEZG9AS00S | Adapter                                  |

## Inclined hood: optimal for keeping an eye on your pots and pans.

- **TouchSelect control:** quick touch-control selection of desired settings and light.
- **Extra silent:** the high-performance hood, with minimal noise.
- **Intensive speed setting:** removes strong kitchen odours especially quickly and effectively.
- **EcoSilence Drive:** the powerful, energy-saving drive for hoods.

|                                                           |                                                                                                                                     |
|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Typology:                                                 | Wall-mounted                                                                                                                        |
| Length electrical supply cord:                            | 130.0 cm                                                                                                                            |
| Height of product, without chimney:                       | 323 mm                                                                                                                              |
| Net weight:                                               | 21.1 kg                                                                                                                             |
| Type of control:                                          | Electronic                                                                                                                          |
| Number of speed settings:                                 | 3-stages + intensive setting                                                                                                        |
| Max. air extraction:                                      | 436 m³/h                                                                                                                            |
| Boost position output recirculating:                      | 441 m³/h                                                                                                                            |
| Max. air recirculation:                                   | 355 m³/h                                                                                                                            |
| Boost position air extraction:                            | 722 m³/h                                                                                                                            |
| Number of lights:                                         | 2                                                                                                                                   |
| Noise level:                                              | 54 dB(A) re 1 pW                                                                                                                    |
| Diameter of air outlet:                                   | 120 / 150 mm                                                                                                                        |
| Grease filter material:                                   | Washable aluminium                                                                                                                  |
| Odour filter:                                             | No                                                                                                                                  |
| Operating Mode:                                           | Exhaust / Recirculation (Accessory available separately)                                                                            |
| Optional accessories:                                     | DWZ0AK0R0, DWZ0AK0S0, DWZ0AX5K0, DWZ0AX5L0, DWZ1AK1B6, DWZ1AK1I6, DWZ1AK1V6, DWZ1AX5C6, DWZ1AX6E1, DZZ0XX0P0, DZZ1XX1B6, HEZG9AS00S |
| Type of lamps used:                                       | LED                                                                                                                                 |
| Grease filter type:                                       | Kassette                                                                                                                            |
| Clean filter reminders:                                   | No                                                                                                                                  |
| Connection rating:                                        | 143 W                                                                                                                               |
| Fuse protection:                                          | 10 A                                                                                                                                |
| Voltage:                                                  | 220-240 V                                                                                                                           |
| Frequency:                                                | 50; 60 Hz                                                                                                                           |
| Plug type:                                                | Gardy plug w/ earthing                                                                                                              |
| Installation typology:                                    | Wall-mounted                                                                                                                        |
| Plug type:                                                | Gardy plug w/ earthing                                                                                                              |
| Dimensions of the product, with chimney (if exists) (in): | x x                                                                                                                                 |
| Dimensions of the packed product:                         | 27.16 x 29.13 x 40.94                                                                                                               |
| Net weight:                                               | 47.000 lbs                                                                                                                          |
| Gross weight:                                             | 66.000 lbs                                                                                                                          |
| Motor location:                                           | Integrated motor in hood body                                                                                                       |
| No-return airflow flap:                                   | Yes                                                                                                                                 |
| Length electrical supply cord:                            | 130.0 cm                                                                                                                            |
| Dimensions of the product, with chimney (if exists):      | 452 x 890.0 x 499.0 mm                                                                                                              |
| Dimensions of the packed product (HxWxD):                 | 690 x 740 x 1040 mm                                                                                                                 |
| Net weight:                                               | 21.1 kg                                                                                                                             |
| Gross weight:                                             | 30.0 kg                                                                                                                             |



4 242002 946825

## Series 6, Wall-mounted cooker hood, 90 cm, Black glass canopy DWK97JM60

### Inclined hood: optimal for keeping an eye on your pots and pans.

- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 32.1 kWh/year
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: B
- Noise min./max. Normal Level: 47/54 dB

#### Variant

#### Design

#### Technical information

#### Performance

#### Power:

#### Environment and safety:

#### Comfort

#### Measures:



#### Technical information

- Inclined Hood black
- 90 cm
- 89 cm Chimney hood, black
- Glass plate: Clear glass black printed.
- Suitable for ducted or re-circulated extraction
- In recirculation operation chimless use possible
- For recirculated extraction a standard recirculation kit or a Clean Air recirculation kit (accessory) is needed
- Wall mounted hood
- easy wall fixing system
- PowerBoost position
- TouchControl
- Electronic controls
- TouchControl with Electronic display
- 3 speeds plus intensive setting via TouchControl
- Electronic controls via TouchControl with Electronic display
- TouchControl (3 speeds plus intensive setting) with Electronic display
- 3 speeds plus intensive setting
- 2 capture areas: front side and bottom side
- Automatic revert setting, 6 minutes
- easy to clean innerframe
- Twin channel high performance fan motor
- Efficient BLDC-technology
- 2 x 1,5 W LED
- Light Intensity: 238 lux
- Colour Temperature: 3500 K
- RimVentilation
- Fliter cover glass

- Metal grease fliter, dishwasher safe
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 436 m³/h Intensive 722 m³/h
- Extraction rate exhaust air according to EN 61591 max. 722 m³/h
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 436 m³/h Intensive 722 m³/h
- Extraction rate exhaust air according to EN 61591:
- max. normal use 436 m³/h, intensive 722 m³/h
- Noise level according to EN 60704-2-13 at max. normal use exhaust air: 64 dB(A) re 1 pW dB(A) re 1 pW
- Noise level according to EN 60704-2-13 exhaust air: Max. normal use: 54 dB(A) re 1 pW Intensive: 65 dB(A) re 1 pW
- Diameter pipe ø 150 mm (ø 120 mm enclosed)
- with one-way flap
- Max. extraction rate: 722 m³/h
- Power rating: 143 W
- Dimensions recirculating with CleanAir Plus recirculation kit (HxWxD): 1118 x 890 x 499 mm - mounting with outer chimney 1188-1458 x 890 x 499 mm - mounting with telescopic chimney 1118 x 890 x 499 mm - mounting with outer chimney 1188-1458 x 890 x 499 mm - mounting with telescopic chimney
- Dimensions exhaust air (HxWxD): 928-1198 x 890 x 499 mm
- Dimensions recirculating, chimney (HxWxD): 988-1258 x 890 x 499 mm
- Dimensions recirculating, chimless (HxWxD): 452 mm x 890 x 499 mm
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
- Extraction rate in recirculation mode: Max. normal use: 410 m³/h
- Intensive: 631 m³/h
- Noise level in recirculation mode with Clean Air Plus odor filter : Max. normal use: 63 dB(A) re 1 pW
- Intensive: 74 dB(A) re 1 pW
- Automatic revert setting, 6 minutes


In accordance with the EU-Regulation No 65/2014

**Series 6, Wall-mounted cooker hood,  
90 cm, Black glass canopy  
DWK97JM60**

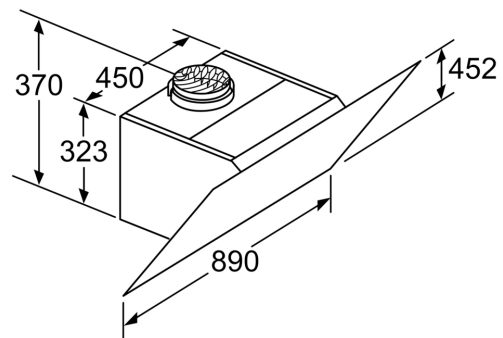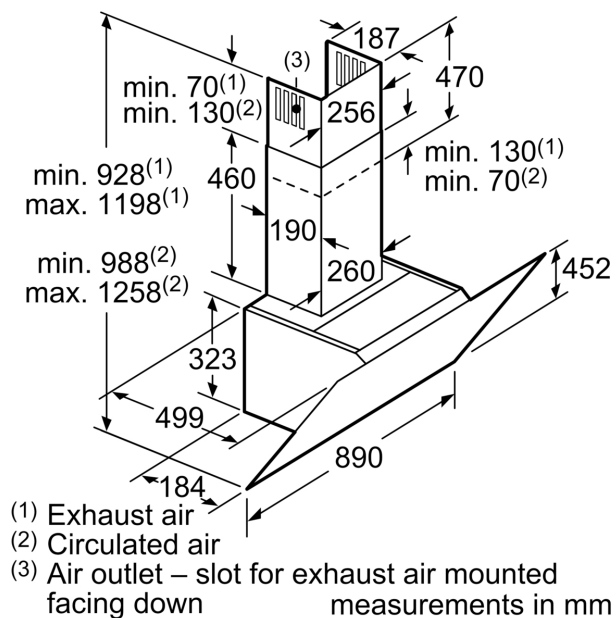


Appliance in circulated air mode  
without duct  
Circulated air set required


measurements in mm

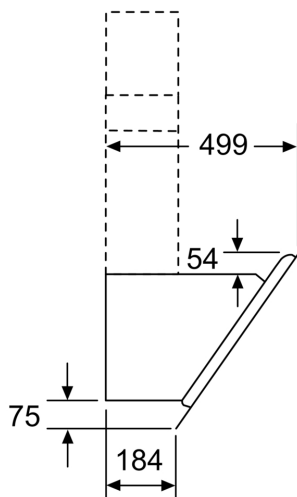

measurements in mm

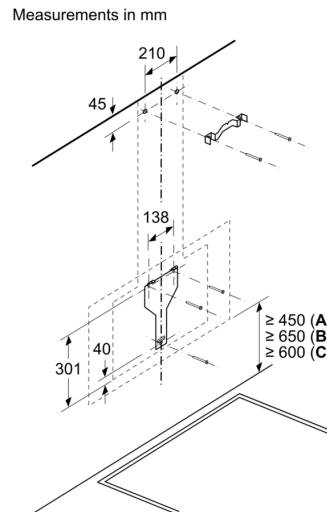


- A:** Electric
- B:** Gas - from upper edge of pan support
- C:** Electric - for Australia and New Zealand

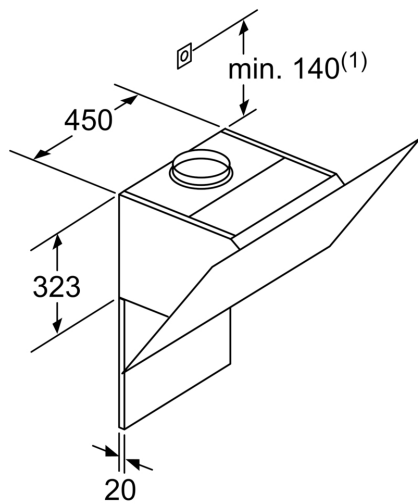

(1) Position  
of socket

Note the maximum  
thickness of the back panel.  
measurements in mm

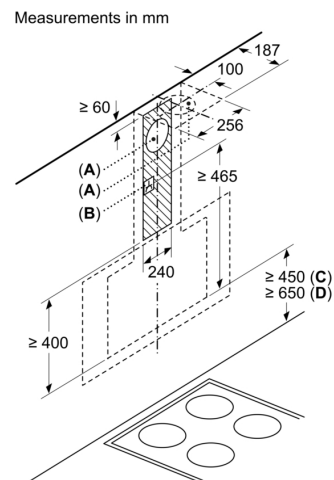

**A:** Exhaust air  
**B:** Socket

From upper edge of pan support

**C:** Electric  
**D:** Gas