

Series 6, Modular Teppanyaki, 40 cm PKY475FB1E



2 x spatula

HEZ394301 Connecting strip

The Teppan Yaki hob of the Domino programme: roast and cook the traditional Japanese way.

- **Comfort Profile:** elegant, appealing design with bevelled front and metal strips on the side.
- **40cm width:** suitable for combining with other Domino and ComfortProfile hobs.
- **Glass-ceramic cover:** elegant hob cover that is easy to clean.
- **Warming setting:** at 70°C it offers the optimal temperature for keeping foods warm.
- **Restart:** restores hob settings in case of an unintentional hob switch-off.

Frequency: 50; 60 Hz
 Product name/family: Vario/Domino Teppan Yaki
 Built-in / Free-standing: Built-in
 Energy input: Electric
 Type of control: Electronic
 Grill grating material: Not applicable
 Required niche size for installation (HxWxD): 90 x x mm
 Width of the appliance: 396 mm
 Dimensions: 90x396x527 mm
 Dimensions of the packed product (HxWxD): 230 x 480 x 610 mm
 Net weight: 9.9 kg
 Gross weight: 12.0 kg
 Residual heat indicator: yes
 Location of control panel: Front
 Basic surface material: Not applicable
 Color of surface: Stainless steel, Alu, brushed
 Length electrical supply cord: 100.0 cm
 Connection rating: 1900 W
 Fuse protection: 13 A
 Voltage: 220-240 V
 Included accessories: 2 x spatula



Series 6, Modular Teppanyaki, 40 cm PKY475FB1E

The Teppan Yaki hob of the Domino programme: roast and cook the traditional Japanese way.

Power and size

- Big stainless steel roast area.
- Frying area can be heated complete or halfway.
- Cooking zone: 1 x Ø 292-344 mm, 0.95 KW
- Thermostat can be set between 160-240 °C in steps of 10° C.
- Special level for keeping warm (70°C).
- Special level for cleaning (40°C).

Design

- Comfort profile
- Can be combined with all autarkic hobs in comfort design
- Removable black glass lid.
- DirectSelect touch control

Comfort


- Digital display
- Timer
- Count-up timer
- ReStart Function
- 2 spatulas included
- Main switch
- Display of the heat up phase.
- 2-fold residual heat indication
- Child-proof lock
- Safety switch-off
- Energy consumption display

Technical Information

- Dimensions of the product (HxWxD mm): 90 x 396 x 527
- Required niche size for installation (HxWxD mm) : 90 x 360 x (490 - 500)
- Min. worktop thickness: 30 mm mm
- Mains cable 1 m (without plug)
- Total connected load: 1900 W


Series 6, Modular Teppanyaki, 40 cm PKY475FB1E

Measurements in mm

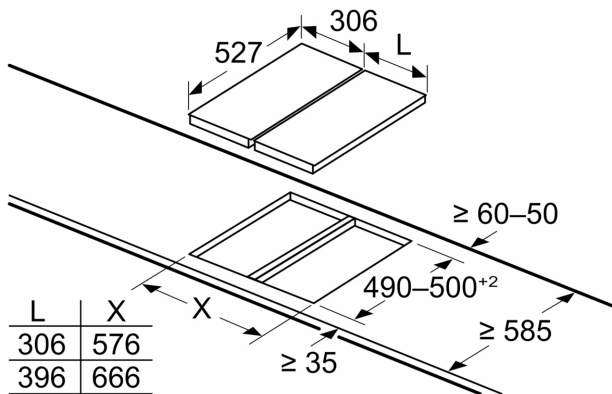

If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)


measurements in mm

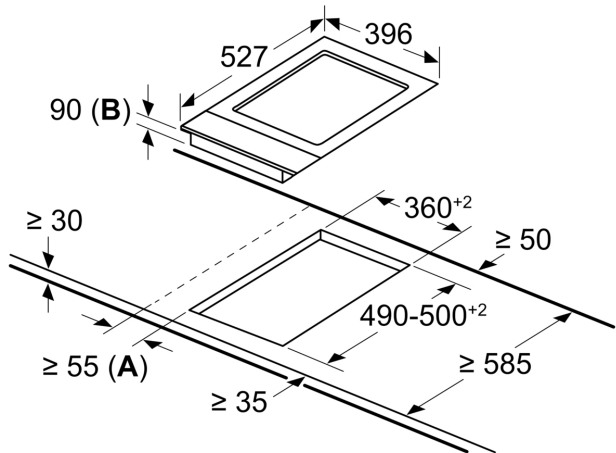

A: Minimum distance from the hob cut-out to the wall

B: Maximum recessed depth


Measurements in mm

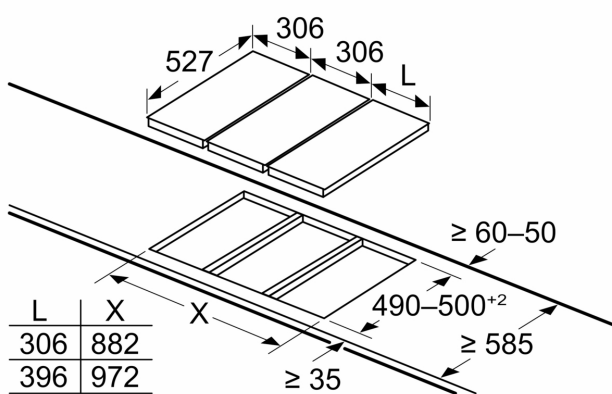

If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Measurements in mm

Picture for the table Domino combination possibilities with corresponding devices and cutout dimensions



If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Cutout dimension (X) depending on the combination (see combination table)


measurements in mm
Domino combination options with
corresponding appliance and cut-out dimensions

Width category:
Appliance width:

	A	B	C	D	L	X		
2x30	306	306	-	-	-	-	612	576
1x30, 1x40	306	396	-	-	-	-	702	666
1x30, 1x60	306	606	-	-	-	-	912	876
1x30, 1x70*	306	710	-	-	-	-	1016	980
1x30, 1x80	306	816	-	-	-	-	1122	1086
1x30, 1x90	306	916	-	-	-	-	1222	1186
2x40	396	396	-	-	-	-	792	756
1x40, 1x60	396	606	-	-	-	-	1002	966
1x40, 1x70*	396	710	-	-	-	-	1106	1070
1x40, 1x80	396	816	-	-	-	-	1212	1176
1x40, 1x90	396	916	-	-	-	-	1312	1276
3x30	306	306	306	-	-	-	918	882
2x30, 1x40	306	306	396	-	-	-	1008	972
2x30, 1x60	306	306	606	-	-	-	1218	1182
2x30, 1x70*	306	306	710	-	-	-	1322	1286
2x30, 1x80	306	306	816	-	-	-	1428	1392
2x30, 1x90	306	306	916	-	-	-	1528	1492
1x30, 2x40	306	396	396	-	-	-	1098	1062
1x30, 1x40, 1x60	306	396	606	-	-	-	1308	1272
1x30, 1x40, 1x70*	306	396	710	-	-	-	1412	1376
1x30, 1x40, 1x80	306	396	816	-	-	-	1518	1482
1x30, 1x40, 1x90	306	396	916	-	-	-	1618	1582
2x40, 1x60	396	396	606	-	-	-	1398	1362
4x30	306	306	306	306	-	-	1224	1188
3x30, 1x40	306	306	306	396	-	-	1314	1278
1x30, 1x75	306	750	-	-	-	-	1056	1020
1x40, 1x75	396	750	-	-	-	-	1146	1110
2x30, 1x75	306	306	750	-	-	-	1362	1326
1x30, 1x40, 1x75	306	396	750	-	-	-	1452	1416

* Not possible with 70 cm induction hob

Measurements in mm Assembly kit (HEZ394301) for Domino

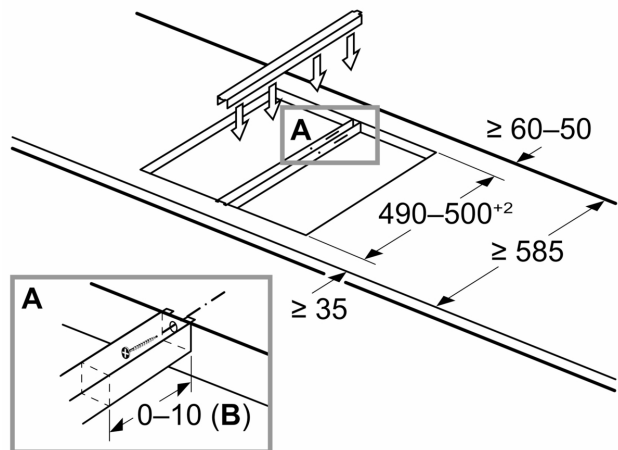

B: Dependent on the cut-out depth