


## Series 2, Induction hob, 60 cm, Black, PUC64RAA5E

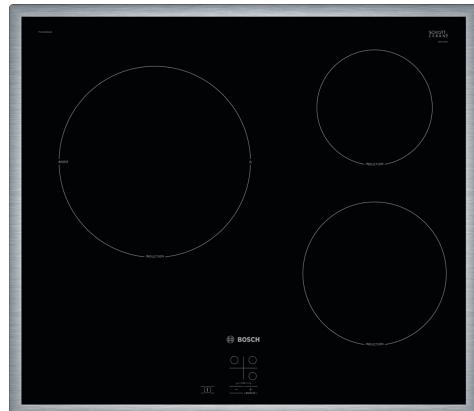

HEZ390090	Wok Set consisting of 3 Items
HEZ9ES100	Espresso maker 4 cups
HEZ9FE280	Iron pan Ø 18 / 28 cm
HEZ9SE030	Set of 2 pots and 1 pan
HEZ9SE040	4 pieces Set
HEZ9SE060	6 pieces Set

### The induction hob: cook fast, clean and safely while using very little energy.

- **Steel Frame:** the flat stainless steel frame around the whole hob
- **Power Boost:** up to 35% faster heating compared to highest power level.
- **Quick Start:** start straight away and select the desired cooking level.
- **Child Lock:** locks the control panel to prevent unauthorized use.
- **Induction Technology:** saves in average 20% energy compared to radiant technology.

Product name/family: ..... Cooking zone ceramic  
Built-in / Free-standing: ..... Built-in  
Energy input: ..... Electric  
Total number of positions that can be used at the same time: ..... 3  
Required niche size for installation (HxWxD): 55 x 560-560 x 490-500 mm  
Width of the appliance: ..... 583 mm  
Dimensions: ..... 55x583x513 mm  
Dimensions of the packed product (HxWxD): ..... 126 x 753 x 608 mm  
Net weight: ..... 8.7 kg  
Gross weight: ..... 10.9 kg  
Residual heat indicator: ..... yes  
Location of control panel: ..... Front  
Basic surface material: ..... Ceramic  
Color of surface: ..... Black, Stainless steel  
Color of frame: ..... Stainless steel  
Length electrical supply cord: ..... 110.0 cm  
Sealed Burners: .....  
Power Boost: ..... Cooking zone rear left  
Power of 2nd heating element (kW): ..... 2.2 kW  
Power of 5th heating element (kW): ..... 1.4 kW  
Connection rating: ..... 4600 W  
Voltage: ..... 220-240 V  
Frequency: ..... 50; 60 Hz  
Energy input: ..... Electric  
Plug type: ..... No plug (electrical connection by electrician)  
Appliance Dimensions (h x w x d) (in): ..... x x  
Dimensions of the packed product: ..... 4.96 x 23.93 x 29.64  
Net weight: ..... 19.000 lbs  
Gross weight: ..... 24.000 lbs  
Total number of positions that can be used at the same time: ..... 3  
Length electrical supply cord: ..... 110.0 cm  
Required niche size for installation (HxWxD): 55 x 560-560 x 490-500 mm  
Dimensions: ..... 55x583x513 mm  
Dimensions of the packed product (HxWxD): ..... 126 x 753 x 608 mm  
Net weight: ..... 8.7 kg  
Gross weight: ..... 10.9 kg



4 242005 293933

## **Series 2, Induction hob, 60 cm, Black, PUC64RAA5E**

### **The induction hob: cook fast, clean and safely while using very little energy.**

---

- 60 cm: space for 3 pots or pans.

#### **Flexibility of cooking zones**

- Cooking zone rear left: 240 mm, 2.2 KW (max. power 3.1 KW)
- Cooking zone rear right: 145 mm, 1.4 KW
- Cooking zone front right: 180 mm, 1.8 KW

#### **Usage convenience**

- 9 stage 1-9: precisely adapt the heat with 9 power levels.

#### **Time saving & efficiency**

- PowerBoost for all zones: boil water more quickly thanks to 50% more energy than at the highest standard level.
- QuickStart Function: when switching on, the hob automatically selects the cooking zone with cookware (placed in off-mode).

#### **Design**

- Frameless

#### **Safety**

- Childproof lock: prevent unintended activation of the hob.
- Main switch: switch off all cooking zones at the touch of a button.
- Safety switch-off: for safety reasons, heating stops after a preset time without interaction (customizable).


#### **Installation**

- Dimensions of the product (HxWxD mm): 55 x 583 x 513
- Required niche size for installation (HxWxD mm): 55 x 560 x (490 - 500)
- Min. worktop thickness: 16 mm mm
- Connected load: 4600 W W
- PowerManagement Function: limit the maximum power if needed (depends on fuse protection of electric installation).
- Power cord: 1.1 m, connected to terminalblock




**BOSCH**

## Series 2, Induction hob, 60 cm, Black, PUC64RAA5E




A: Minimum distance from the hob cut-out to the wall.  
B: Recessed depth  
C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.  
The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.


D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50

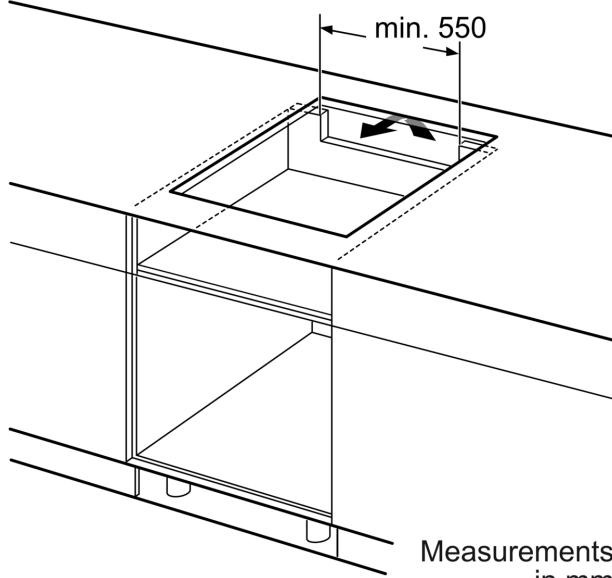

Measurements  
in mm

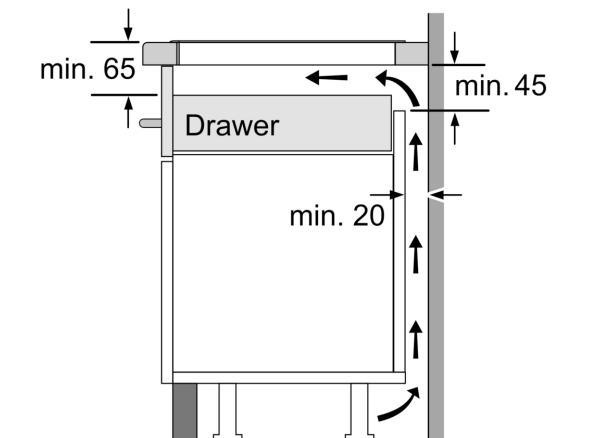

Measurements in mm

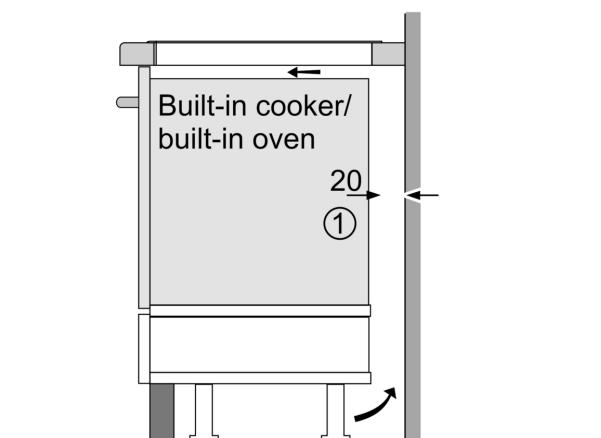

①  
Ventilation gap must  
be present.

Measurements in mm