


Series 8, Flex induction hob, 60 cm, Black, PXY601JW1E

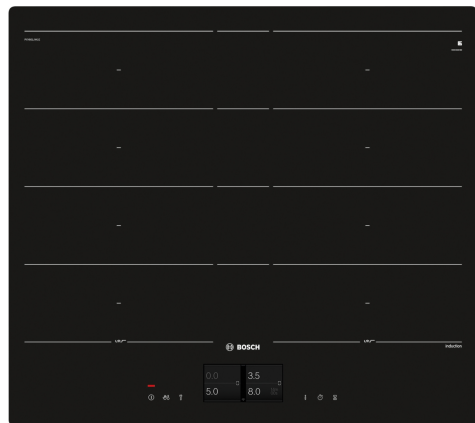

HEZ390522 Griddle Plate, HEZ9ES100 Espresso maker 4 cups, HEZ9FE280 Iron pan Ø 18 / 28 cm, HEZ9FF010 Flex Pan, large, HEZ9FF030 Flex Pan set, 3 pcs., HEZ9FF040 Flex Pan set, 4 pcs., HEZ390011 Stainless Steel roaster with glas lid, HEZ390012 Steaming Rack for Stainless Steel roaste, HEZ390090 Wok Set consisting of 3 Items, HEZ390210 System pan diameter 15 cm, HEZ390220 System pan diameter 19 cm, HEZ390230 System pan diameter 21cm, HEZ390250 System pan diameter 28 cm, HEZ39050 Wireless temperature sensor for cooktop, HEZ390512 Teppan Yaki (large), HEZ9SE040 4 pieces Set, HEZ9SE060 6 pieces Set, HEZ9TY010 Teppan Yaki, HZ390011 Stainless Steel roaster with glas lid

The induction hob with PerfectCook and PerfectFry: achieve optimal results thanks to automatic temperature control.

- **TFT Touch Display:** easy navigation with clear text and vivid colours.
- **Extended FlexInduction Zone:** maximum space on your hob for large cookware.
- **PerfectCook:** the sensor which can be additionally aquired, prevents overcooking and boiling over by precise controlling the cooking temperature.
- **PerfectFry:** no more worries about scorching.

Product name/family: Cooking zone ceramic
 Built-in / Free-standing: Built-in
 Energy input: Electric
 Total number of positions that can be used at the same time: 4
 Width of the appliance: 572 mm
 Dimensions: 56x572x512 mm
 Dimensions of the packed product (HxWxD): 126 x 753 x 597 mm
 Net weight: 13.7 kg
 Gross weight: 16.0 kg
 Residual heat indicator: yes
 Location of control panel: Front
 Color of surface: Black
 Length electrical supply cord: 110.0 cm
 Sealed Burners: No
 Power Boost: All cooking zones
 Power of 2nd heating element (kW): 3.3 kW
 Power of heating element (kW in boost): [3.7] kW
 Power of 6th heating element (kW in boost): 3.7 kW
 Connection rating: 7400 W
 Voltage: 220-240 V
 Frequency: 60; 50 Hz
 Energy input: Electric
 Plug type: No plug (electrical connection by electrician)
 Appliance Dimensions (h x w x d) (in): x x
 Dimensions of the packed product: 4.96 x 23.50 x 29.64
 Net weight: 30.000 lbs
 Gross weight: 35.000 lbs
 Total number of positions that can be used at the same time: 4
 Length electrical supply cord: 110.0 cm
 Dimensions: 56x572x512 mm
 Dimensions of the packed product (HxWxD): 126 x 753 x 597 mm
 Net weight: 13.7 kg
 Gross weight: 16.0 kg



4 242002 949123

Series 8, Flex induction hob, 60 cm, Black, PXY601JW1E

**The induction hob with PerfectCook and
PerfectFry: achieve optimal results thanks
to automatic temperature control.**

Power and size

- 4 Induction cooking zones
- Cooking zones: 1 x 380 mmx230 mm, 3.3 KW (max. power 3.7 KW)
Induction or 2 x 190 mm, 230 mm , 2.2 KW (max. power 3.7 KW)
Induction; 1 x 380 mmx230 mm, 3.3 KW (max. power 3.7 KW)
Induction or 2 x 190 mm, 230 mm , 2.2 KW (max. power 3.7 KW)
Induction
- 17 power levels

Design

- Flush design
- FullTouch TFT Display
- Extended FlexInduction zone




Comfort

- PerfectFry sensor with 5 temperature settings
- PerfectCook sensor ready (sensor sold separately)
- MoveMode (3 levels)
- PowerBoost function for all zones
- Switch off timer for every cooking zone Timer Count-up timer
- ReStart Function
- 2 stage residual heat indicator
- Main switch
- Automatic pan recognition sensor PowerManagement Function
Safety switch-off Childproof lock Wipe protection function
QuickSelect function
- Energy consumption display
- Home Connect (only in countries where Home Connect service is
available)
- Hob-based hood control (with matching hood)


Technical Information

- Dimensions of the product (HxWxD mm): 56 x 572 x 512
- Min. worktop thickness: 16 mm mm
- Connection cable 110 cm
- Connected load: 7400 W W
- Cable included
- For installation in stone, granitic or synthetic worktops. Other
worktop materials require a suitability check with the worktop
manufacturer.

**Series 8, Flex induction hob, 60 cm,
Black,
PXY601JW1E**

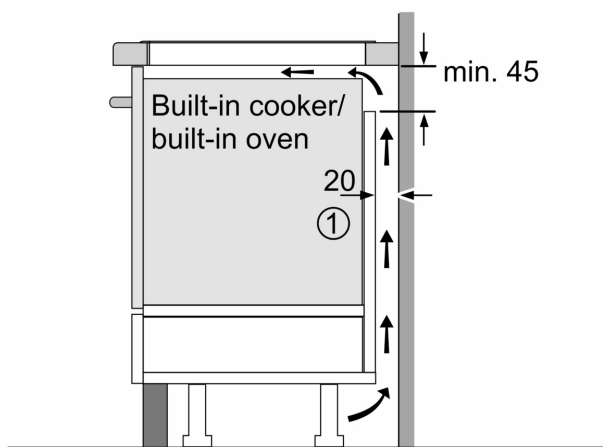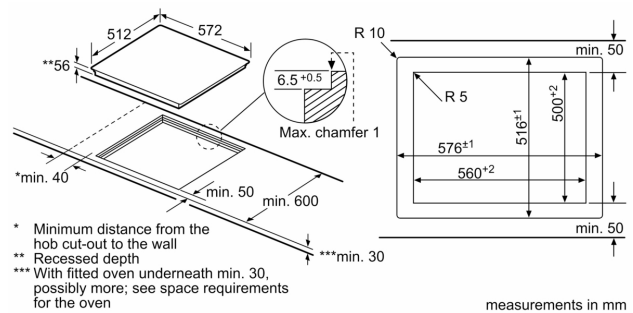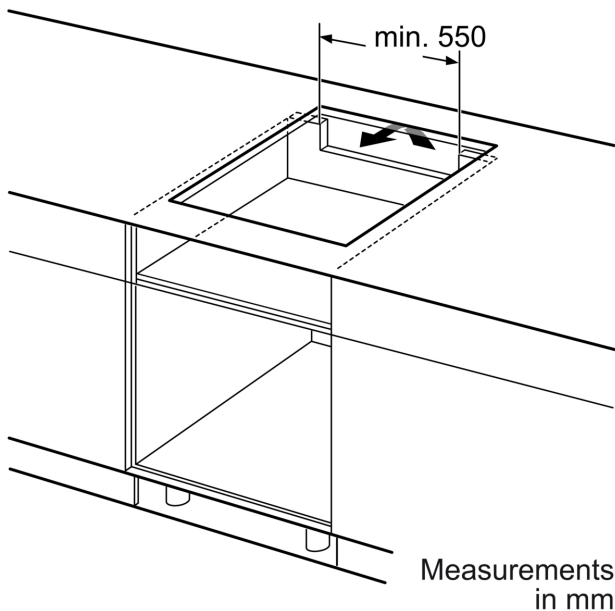

All measurements in mm

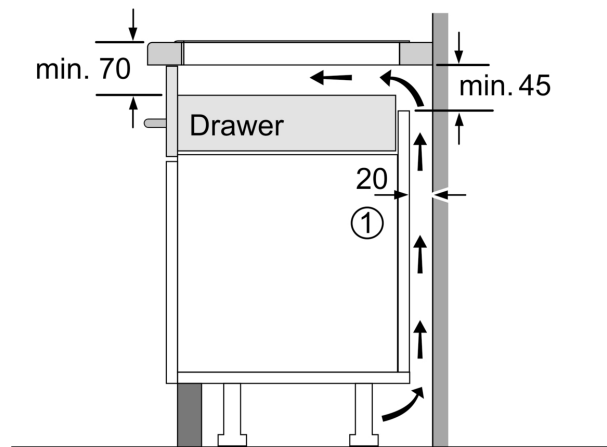

Measurement in mm