

Series 4, wall-mounted cooker hood, 90 cm, Stainless steel DWB96DM50



Box-design hood: performance and matching kitchen design bundled in one hood.

- **Especially silent:** maximal extractor performance with minimal noise
- **TouchSelect control:** Quickly select hood settings via touch.

Color chimney: Stainless steel
 Typology: Wall-mounted
 Length electrical supply cord: 130 cm
 Height of the chimney: 583-912/583-1022 mm
 Height of product, without chimney: 53 mm
 Net weight: 13.4 kg
 Type of control: Electronic
 Number of speed settings: 3-stages + intensive setting
 Max. air extraction: 372 m³/h
 Boost position output recirculating: 441 m³/h
 Max. air recirculation: 337 m³/h
 Boost position air extraction: 604 m³/h
 Number of lights: 2
 Noise level: 60 dB(A) re 1 pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material: Washable aluminium
 Odour filter: No
 Type of lamps used: LED
 Grease filter type: Kassette
 Clean filter reminders: No
 Connection rating: 220 W
 Fuse protection: 10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type: Gardy plug w/ earthing
 Installation typology: Wall-mounted
 Material body: Stainless steel
 Plug type: Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in): x x
 Dimensions of the packed product: 19.29 x 25.59 x 40.55
 Net weight: 30.000 lbs
 Gross weight: 41.000 lbs
 Motor location: Integrated motor in hood chimney
 No-return airflow flap: Yes
 Length electrical supply cord: 130 cm
 Dimensions of the product, with chimney (if exists): 1075.0x900x500 mm
 Dimensions of the packed product (HxWxD): 490x650x1030 mm
 Net weight: 13.4 kg
 Gross weight: 18.7 kg



Series 4, wall-mounted cooker hood, 90 cm, Stainless steel DWB96DM50

Box-design hood: performance and matching kitchen design bundled in one hood.

Design:

- 90 cm Chimney hood
- Wall mounted hood
- Box design
- Appliance colour: brushed steel
- 3 capture areas: front side and bottom side

Environment and safety:

- Energy Efficiency Class: B*
- Average Energy Consumption: 48.5 kWh/year*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*

Comfort:

- TouchControl for extractor speeds and light
- Electronic controls
- TouchControl with Electronic display
- 3 speeds plus intensive setting via TouchControl
- Electronic controls via TouchControl with Electronic display
- TouchControl (3 speeds plus intensive setting) with Electronic display

Operating and power:

- 3 speeds plus intensive setting
- Automatic revert setting, 6 minutes
- Max. extraction rate: 604 m³/h

Power:

- Power rating: 220 W
- Twin channel high performance fan motor
- Capacitor energy efficient
- 2 x 1,5W LED
- Light Intensity: 214 lux
- Colour Temperature: 3500 K

Measures:

- 90 cm wide
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 635-965 MM x 900 x 500 mm
- Dimensions recirculating (HxWxD): 635-1075 MM x 900 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD):
- 703 x 900 x 500mm - mounting with outer chimney
- 833-1163 x 900 x 500 mm - mounting with telescopic chimney
- Dimensions recirculating with CleanAir module (HxWxD):
- 703 x 900 x 500mm - mounting with outer chimney
- 833-1163 x 900 x 500 mm - mounting with telescopic chimney
- Dimensions recirculating with CleanAir module (HxWxD);
- 703 x 900 x 500mm - mounting with outer chimney


- 833-1163 x 900 x 500 mm - mounting with telescopic chimney

Technical information:

- Voltage: 220 - 240 V
- Electrical cable length 1.3 m
- Noise min./max. Normal Level: 48/60 dB*
- Suitable for ducted or re-circulated extraction
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 372m³/h
- Intensive 604 m³/h
- Metal grease filter, dishwasher safe
- Extraction rate exhaust air according to EN 61591:
- max. normal use 372 m³/h, intensive 604 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 60 dB(A) re 1 pW (47 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
- Max. normal use: 60 dB(A) re 1 pW (47dB(A) re 20 µPa sound pressure)
- Intensive: 70 dB(A) re 1 pW (57 dB(A) re 20 µPa sound pressure)


* In accordance with the EU-Regulation No 65/2014

Series 4, wall-mounted cooker hood, 90 cm, Stainless steel DWB96DM50

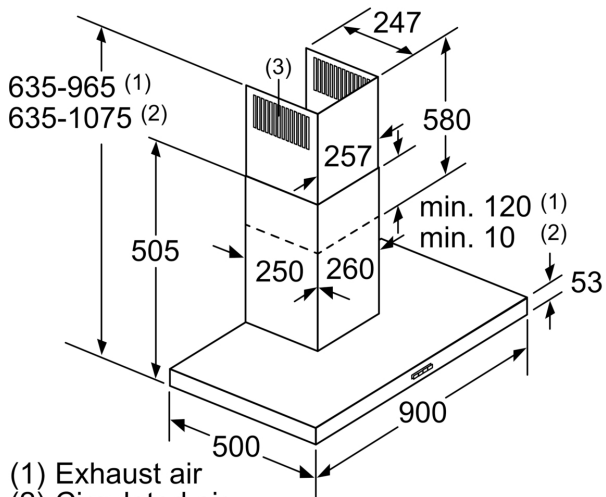

- (1) Exhaust air
(2) Circulated air
(3) Air outlet – slots for exhaust air to be mounted facing down


measurements in mm

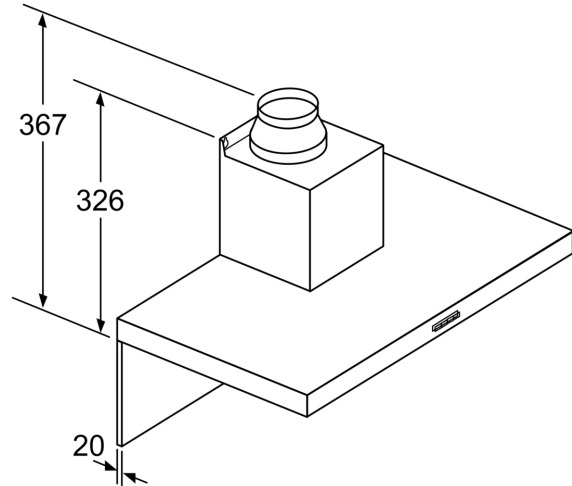

If a back panel is used,
the design of the appliance
must be considered.


measurements in mm

Measurements in mm

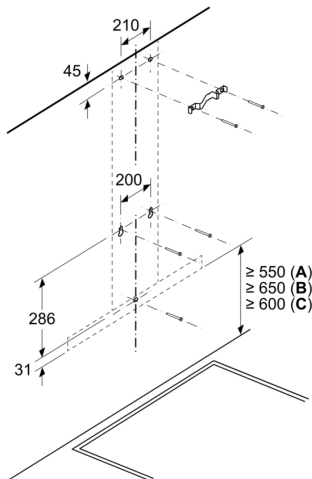

- A: Electric
B: Gas - from upper edge of pan support
C: Electric - for Australia and New Zealand

Measurements in mm

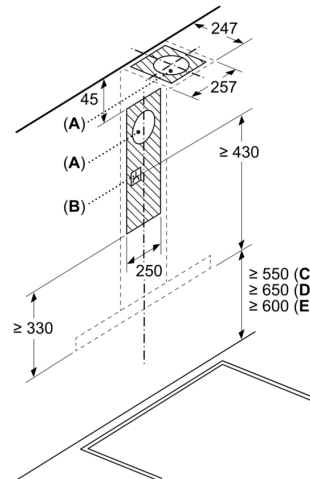

- A: Exhaust air outlet
B: Socket
C: Electric
D: Gas - from upper edge of pan support
E: Electric - for Australia and New Zealand