

Series 8, Wall-mounted Extractor Hood, 90 cm, clear glass black printed DWF97RV60



Flat design hood: always keep an eye on your pots and pans with this design highlight.

- **Home Connect:** control your hood via the app.
- **PerfectAir sensor:** enjoy quieter, odour-free cooking.
- **EcoSilence Drive:** the powerful, energy-saving drive for hoods.
- **Cooktop-based Hood Control:** convenient operation of the hood via your hob.
- **Especially silent:** maximal extractor performance with minimal noise

Typology:Wall-mounted
 Length electrical supply cord: 130.0 cm
 Height of the appliance: 430 mm
 Minimum distance above an electric hob: 450 mm
 Net weight: 24.7 kg
 Type of control:Electronic
 Number of speed settings:3-stage + 2 intensive
 Max. air extraction:394 m³/h
 Boost position output recirculating: 404 m³/h
 Max. air recirculation: 249 m³/h
 Boost position air extraction: 717 m³/h
 Maximum Air flow:394 m³/h
 Number of lights: 2
 Noise level:57 dB(A) re 1pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material:Washable aluminium
 EAN code:4242002946580
 Connection rating: 146 W
 Fuse protection:10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type: GARDY plug w/ earthing
 Installation typology:Wall-mounted

DWZ0AF0R0	Long Life recirculation kit (chimless)
DWZ0AF0S0	Long Life recirculation kit
DWZ0AX5K0	Chimney extension 1000 mm
DWZ0AX5L0	Chimney extension 1500 mm
DWZ1AF1B6	Clean Air Plus odor filter (replacement)
DWZ1AF1I6	Clean Air Plus recirculation kit
DWZ1AF1V6	Clean Air Plus recirc. kit (chimless)
DWZ1AX5C6	Clean Air Plus recirc. kit external
DWZ1AX6E1	Chimney standard black
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)



4 242002 946580

Series 8, Wall-mounted Extractor Hood, 90 cm, clear glass black printed DWF97RV60

Flat design hood: always keep an eye on your pots and pans with this design highlight.

Energy efficiency class

- Energy Efficiency Class: B*
- Average Energy Consumption: 40 kWh/year*
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Noise max. Normal Level: 57 dB*

Design:

- Chimney extractor hood
- 90 cm
- black
- 7-segment display with control ring
- Glas plate: clear glass black printed
- Suitable for ducted or recirculating operation
- In recirculation operation chimless use possible
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Designed for wall mounted installation

Remote Monitoring and Control (only in countries where Home Connect service is available)

- Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- cooktop
- (with matching cooktop)
- None, cooktop

Comfort and Safety:

- Gas spring 3
- touch control for extractor speeds and light
- Electronic controls
- touch control with Electronic display
- Electronic controls via touch control with 2x7-segment, Electronic display
- touch control, Rotary swivel (3-stage + 2 intensive) with Electronic display, 2x7-segment
- 3-stage + 2 intensive
- 1-99 min
- 2 capture areas: front side and bottom side
- Intensive op. revert dur.: 6 min
- Easy to clean

Technical information:

- Installation with gas hob not recommended
- Light dimmer function
- softlight dimmer function
- BLDC for Ventilation
- 2 single inlet vertical, BLDC for Ventilation
- 2 x 3W LED
- Light Intensity: 589 lux
- Colour Temperature: 3500 K
- Metal grease filter with side extraction
- grease- and charcoal filter
- Filter cover glass
- Removable metal grease filters, dishwasher safe


Power:

- Extraction rate according to DIN/EN 61591 Ø 15 cm: max. Normal 394 m³/h Intensive 717 m³/h
- Ducted extraction rate according to DIN/EN 61591 max. 394 m³/h
- Maximum extraction 394 m³/h
- Extraction rate exhaust air according to EN 61591:
- max. normal use 394 m³/h, intensive 717 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 57 dB(A) re 1 pW (44 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 57 dB(A) re 1 pW (44 dB(A) re 20 µPa sound pressure)
- Intensive: 70 dB(A) re 1 pW (57 dB(A) re 20 µPa sound pressure)
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Yes
- Max. extraction rate: 717 m³/h
- Power rating: 146 W
- Dimensions exhaust air (HxWxD): 1019-1289 x 890 x 263 mm
- Dimensions recirculating, chimney (HxWxD): 1079-1349 x 890 x 263 mm
- Dimensions recirculating with CleanAir module (HxWxD):
- 1209 x 890 x 263 mm - mounting with outer chimney
- 1279-1549 x 890 x 263 mm - mounting with telescopic chimney
- Dimensions recirculating, chimless (HxWxD): 550 mm x 890 x 263 mm

TECHNICAL INFORMATION

- Electrical cable length 1.3 m
- Dimensions (HxWxD): 1019 x 890 x 263 mm
- DWF97RV60
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
- Extraction rate in recirculation mode: Max. normal use: 311 m³/h
- Intensive: 578 m³/h
- Noise level in recirculation mode with Clean Air Plus odor filter : Max. normal use: 60 dB(A) re 1 pW
- Intensive: 74 dB(A) re 1 pW



Series 8, Wall-mounted Extractor
Hood, 90 cm, clear glass black
printed
DWF97RV60

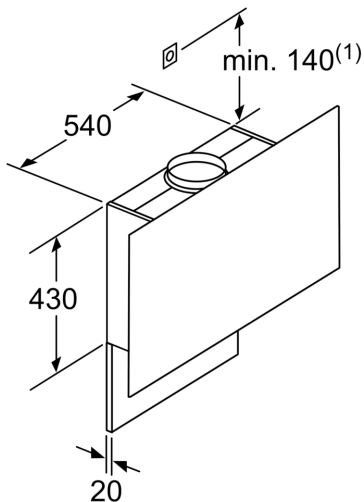

(1) Position of socket


Note the maximum thickness of the back panel.

measurements in mm

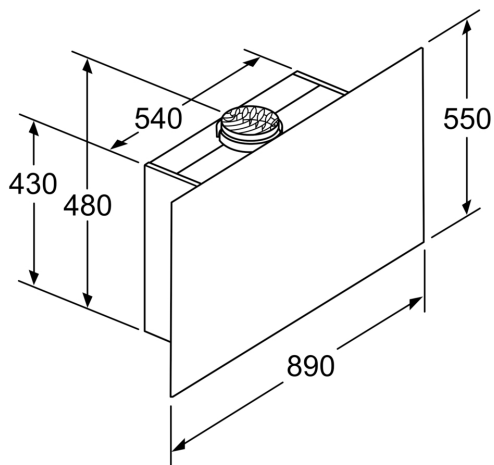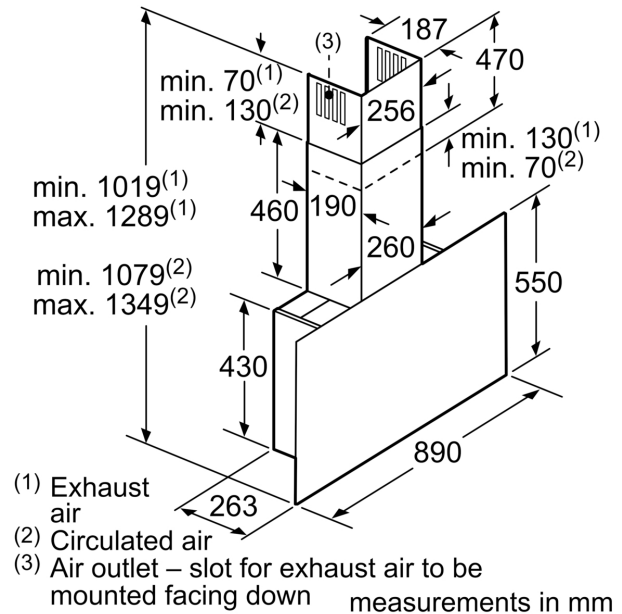

Appliance in circulated air mode
 without duct
 Circulated air set required

measurements in mm

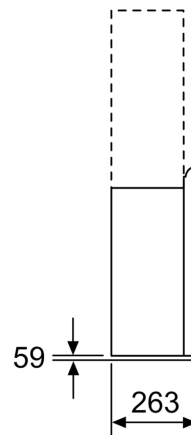

measurements in mm

