


**Series 4, Gas Hob, 60 cm, Stainless steel
PGH6B5B62Z**

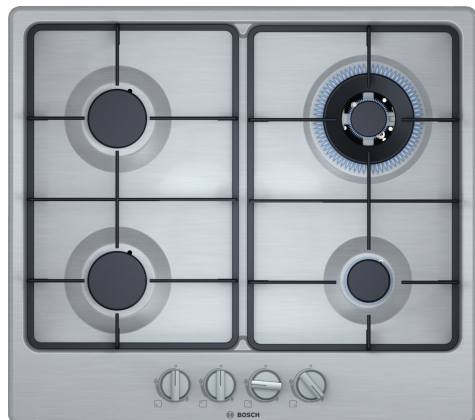

HEZ298105 Simmer plate
HEZ298110 Wok ring
HEZ298115 Small pot support

**The gas hob with front-mounted controls:
the desired cooking zones can be
conveniently operated from the front.**

- **Continuous cast-iron finish pan supports:** for maximum stability.
- **Sword knobs:** for an ergonomic control.
- **Wok burner:** powerful cooking at up to 3.5 kW (depending on gas type).
- **Safety solution for your gas hob.**
- **Surface colour:** elegant stainless-steel design.

Product name/family:gas hob w integrated controls
Built-in / Free-standing: Built-in
Energy input: Gas
Total number of positions that can be used at the same time: 4
Type of control setting devices: sword knobs
Min. required niche size for installation (HxWxD):45 x 560-562 x 480-492 mm
Width of the appliance:582 mm
Dimensions: 53 x 582 x 520 mm
Dimensions of the packed product (HxWxD): 141 x 651 x 578 mm
Net weight:8.1 kg
Gross weight: 9.0 kg
Residual heat indicator:No
Location of control panel: Front
Basic surface material: Stainless steel
Color of surface: Stainless steel
Length electrical supply cord: 150.0 cm
EAN code:4242005298792
Gas connection rating:8000 W
Fuse protection:3 A
Voltage: 220-240 V
Frequency: 50; 60 Hz



Series 4, Gas Hob, 60 cm, Stainless steel PGH6B5B62Z

**The gas hob with front-mounted controls:
the desired cooking zones can be
conveniently operated from the front.**

Design

- Stainless steel surface
- Cast iron finish w rubber feet

Comfort & Convenience

- Sword Knobs: easily access knobs in front with strong grip for effortless turning.
- Ignition via control knobs: just push and turn the knob to ignite the flame.

Burners and power

- 4 PC
- Left front: Standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: WOK burner up to 3.5 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: NG H/E 20mbar, E+ 20/25mbar
- Liquid gas G30,31 28-30/37mbar
- Preset of liquid gas (28-30/37mbar)
- Nozzle set for Natural gas nozzles (20 mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 582 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1.5 m
- Connected load: 8 KW