

8, , 60 x 60 cm, Stainless steel
HBG6764S6B



HEZ327000 :, HEZ530000 :, HEZ531010 :, HEZ532010 :, HEZ617000 :, HEZ625071 Grill tray, HEZ631070 :, HEZ632070 :, HEZ633001 Lid for professional pan, HEZ633070 Professional pan, HEZ634000 :, HEZ635000 :, HEZ636000 :, HEZ638270 2 level telescopic rails, full ext,pyro, HEZ638370 3 level telescopic rails, full ext,pyro, HEZ660050 :, HEZ664000 :, HEZ915003 :

PerfectBake
PerfectRoast:
Series 8

• **4D Hotair:**

• **TFT:**

• : Home Connect

:40.9 .
 Built-in / Free-standing:
 :Pyrolytic+Hydrolytic
 (x x): 585-595 x 560-568 x 550 mm
 : 595x594x548 mm
 (xx): 670 x 670 x 680 mm
 : Stainless steel
 : Glass
 : 38.5 .
 : 71 l
 : 4D hot air, Defrost, Full width grill, Hot Air-Eco, Half width grill, Conventional heat, Conventional heat ECO, Pizza setting, pre-heating,
 : 1
 : 120.0 .
 - 1: 1
 : 1
 1: 2800 W
 1: 2200 W
 : A+
 Energy consumption per cycle conventional (2010/30/EC):0.87 kWh/cycle
 Energy consumption per cycle forced air convection (2010/30/EC):0.69 kWh/cycle
 Energy efficiency index (2010/30/EC):81.2 %
 : 3600 W
 () : 16 A
 : 220-240 V
 : 50; 60 Hz
 : no plug
 : HBG6764B6B
 :
 cutout / () : x
 : 26.37 x 26.37 x 26.77
 : 85.000
 : 90.000
 : 120.0 .
 : 38.5 .



4 242002 932491


8, , 60 x 60 cm, Stainless steel
HBG6764S6B

PerfectBake
PerfectRoast:
Series 8


Heating Functions

- 1 3 :
- 4D hot air
- Hot Air-Eco Conventional heat Conventional heat ECO Hot air
grilling Full width grill Half width grill Pizza setting Bottom heat
low temperature cooking Defrost pre-heating warming
- 30 C - 300 C
- : 71 l
- Pyrolytic self-cleaning function
- IC6_CBO_62
- E
- bottom, SoftClose, Soft opening
- baking sensor
- multipoint temperature probe
- HR,
-
- : door lock electronical
- childproof lock Safety switch-off func oven Residual heat indicator
start button
- : 120 .
- 3600 W
- (HxWxD mm) : 595 mm x 594 mm x 548 mm
- (HxWxD mm) : 585 mm - 595 mm x 560 mm - 568 mm x
550 mm

8, , 60 x 60 cm, Stainless steel
HBG6764S6B

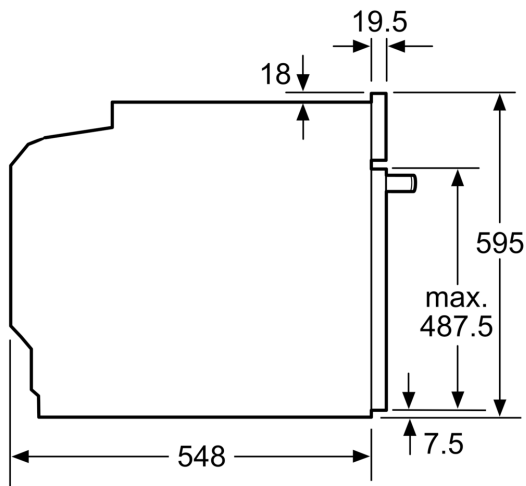


measurements in mm

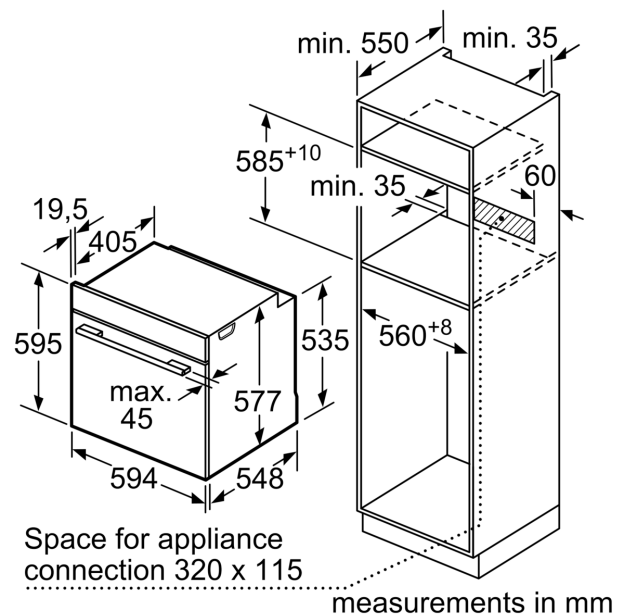

measurements in mm

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

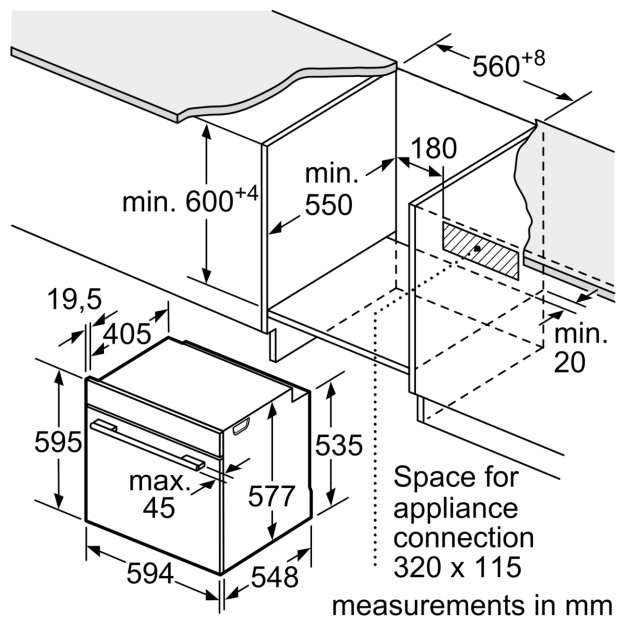

measurements in mm