


**8, Induction hob with integrated ventilation system, 80 cm, surface mount with frame
PXX875D67E**

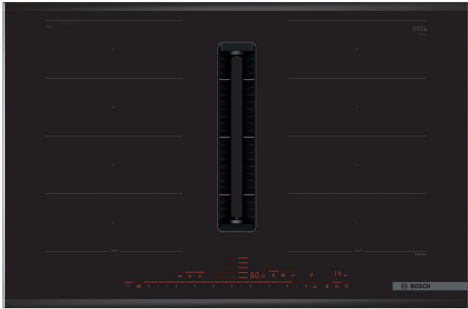

HEZ32WA00 :, HEZ390011 :, HEZ390012 :, HEZ39050 :, HEZ390512 :,
HEZ390522 :, HEZ9CF240 :, HEZ9CF280 :, HEZ9ES100 :, HEZ9FE280
:, HEZ9FF010 :, HEZ9FF030 :, HEZ9FF040 :, HEZ9SE030 :,
HEZ9SE040 :, HEZ9SE060 :, HEZ9TY010 :, HEZ9VDKE1 :, HEZ9VDKR0
:, HEZ9VDKR1 :, HEZ9VDKR2 :, HEZ9VDSB1 :, HEZ9VDSB2 :,
HEZ9VDSB3 :, HEZ9VDSB4 :, HEZ9VDSI0 :, HEZ9VDSI1 :,
HEZ9VDSM1 :, HEZ9VDSM2 :, HEZ9VDSS1 :, HEZ9VDSS2 :,
HEZ9VEDU0 :, HEZ9VRCR1 :, HEZ9VRPD1 :

- **DirectSelect Premium:**
- **FlexInduction:**
- **PerfectFry:** 5
- **PowerBoost** 50%


/ :
Built-in / Free-standing:
:
: 4
(x x) : 223 x 750-750 x 490-490 mm
: 816 mm
: 223x816x527 mm
(x x) : 430 x 940 x 660 mm
: 28.5 .
: 33.4 .
: Separate
:
: Black, Stainless steel
: Stainless steel
: 110.0 .
seal:
: Booster
2 (kW): 3.3 kW
: 17-stage + 2 intensive
: 500 m³/h
boost : 595.0 m³/h
: 499 m³/h
boost : 622 m³/h
: 69 dB(A) re 1pW
:
:
: 220-240/380-415 V
: 50-60 Hz




**8, Induction hob with integrated
ventilation system, 80 cm, surface
mount with frame
PXX875D67E**

8, Induction hob with integrated ventilation system, 80 cm, surface mount with frame PXX875D67E

measurements in mm

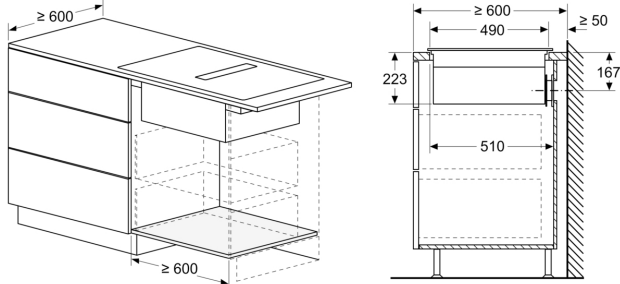


measurements in mm

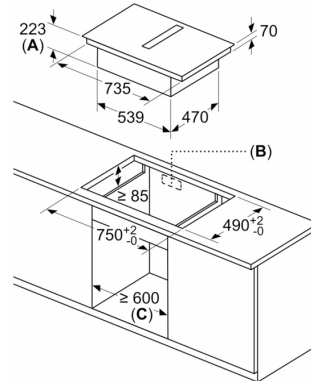

- A: Recessing depth
B: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.
C: All 80cm width class models can be installed in 60cm wide furniture by adjusting the side panels.

Measurements in mm

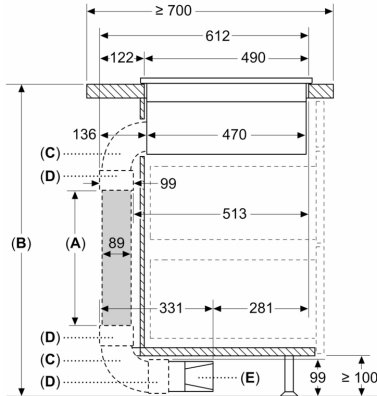


- A: Tube length
B: Kitchen height
C: 90° L-size bow
D: Connector sleeve
E: Diffusor

Ducting kit available for ≥ 700 mm depth worktops and up to 960 mm height

The installer has to select the tube length and if necessary cut it according to the kitchen height

A	B
500	≤ 960
1000	> 960







Measurements in mm

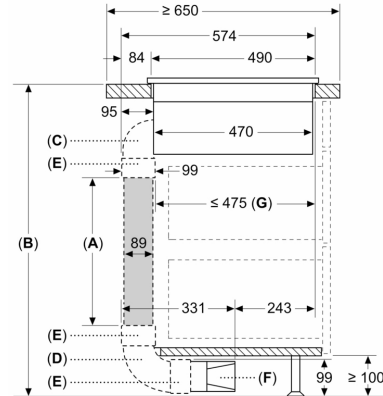


- A: Tube length
B: Kitchen height
C: 90° L-size bow
D: 90° L-size bow
E: Connector sleeve
F: Diffusor
G: Shortened Drawer

The installer has to select the tube length and if necessary cut it according to the kitchen height


A	B
500	≤ 940
1000	> 940

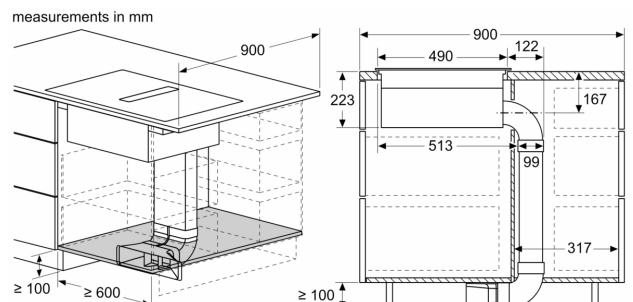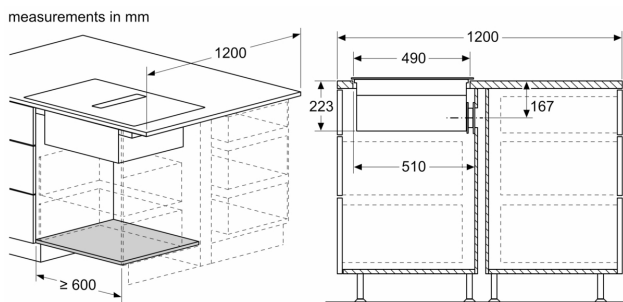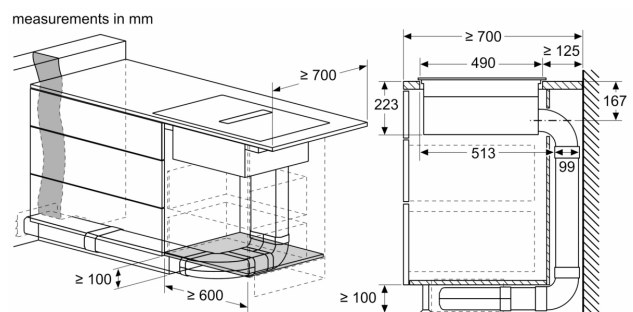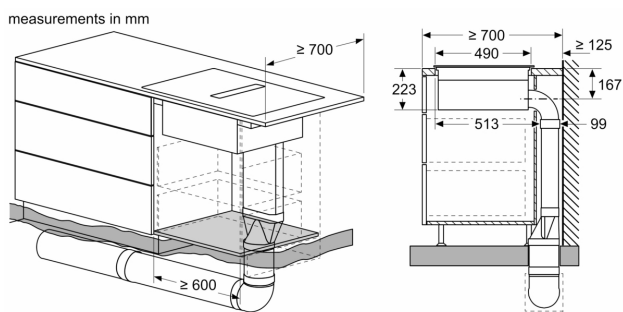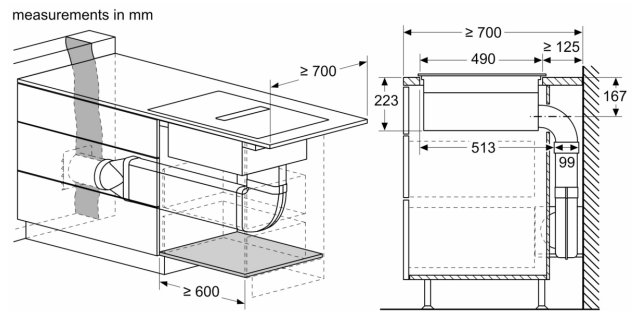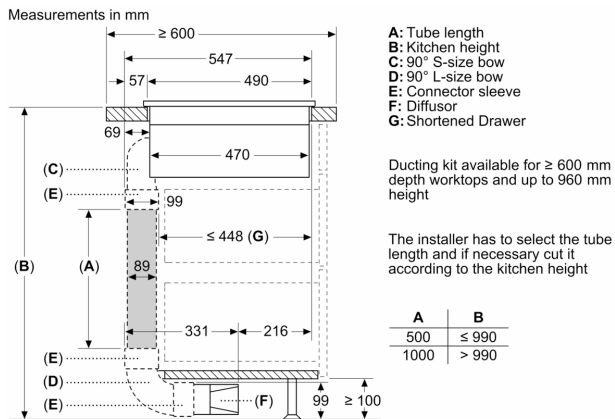

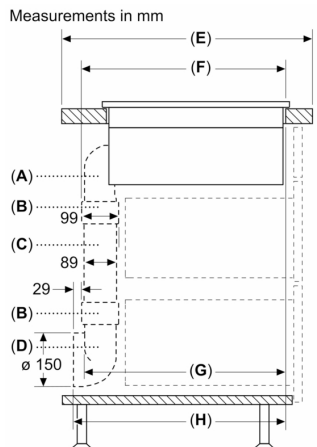

A	E	F	G	H
S-size	≥ 600	547	545	579
M-size	≥ 650	574	569	603
L-size	≥ 700	612	609	643


A: 90° Bow
B: Connector sleeve
C: Straight tube
D: 90° Adapter round-flat

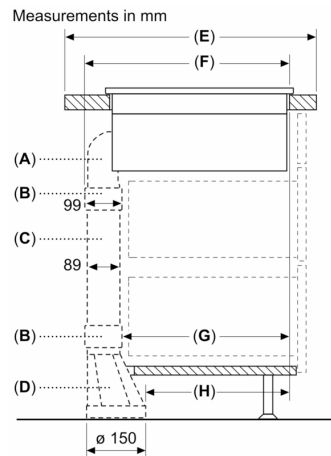


A	E	F	G	H
S-size	≥ 600	547	451	389
M-size	≥ 650	574	475	413
L-size	≥ 700	612	515	453

A: 90° Bow
B: Connector sleeve
C: Straight tube
D: Straight adapter round-flat

Measurements in mm

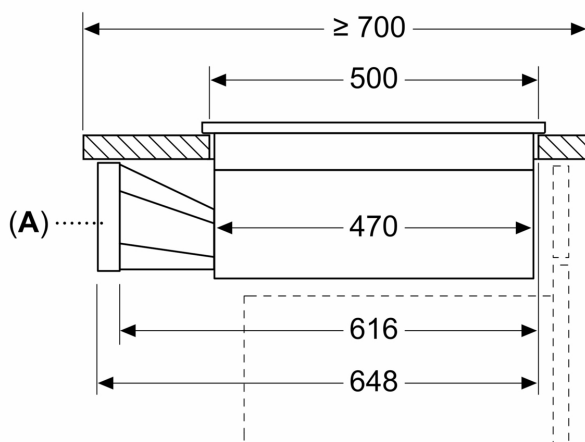


A: Adapter round-flat

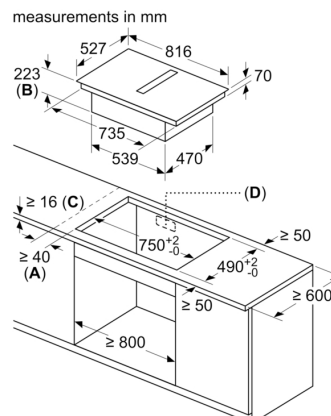


A: Minimum distance from the hob cut-out to the wall
B: Recessing depth
C: The worktop into which the hob is installed must withstand loads of approx. 60kg; suitable substructures must be used if required.
D: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.

measurements in mm
Front view

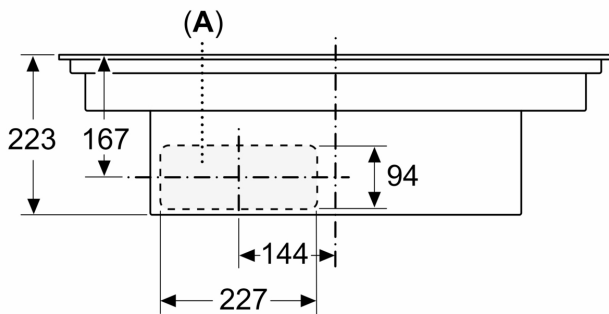


measurements in mm
Front view – unit cut-out
for unducted recirculation

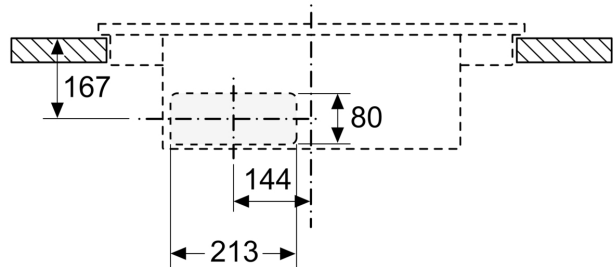

A: Connected directly at the rear

measurements in mm
Side view



When installing directly at outer walls that are non-insulated ($\mu \geq 0.5 \text{ W/m}^2 \cdot ^\circ\text{C}$), we recommend to use partially or fully ducted recirculation configurations.

measurements in mm
Front view

