

8, , 177.5 x 56 cm,
KIF42P60TW



VitaFresh pro 0°C :

• LED

• :

• SuperCooling :

:	190.000
:	
:	1
:	2
:	556 mm
:	1772 mm
:	545 mm
:	81.0 kg
(HxWxD):	1775.0 x 560 x 550 mm
:	
:	
:	3
:	
:	
:	
:	230.0 cm
:	39 dB(A) re 1 pW
:	
Ecolyse:	
:	1 compressor/2 cold circuits
:	
:	
:	
:	4
:	
:	
:	
:	1
:	
:	
:	
:	90 W
:	10 A
:	220 V
:	60 Hz
:	
:	()
:	39 dB(A) re 1 pW
:	
:	220V T
XX :	
:	77.95 x 24.80 x 25.98
:	179.000



**8, , 177.5 x 56 cm,
KIF42P60TW**

VitaFresh pro 0°C :

- : 302
- : 39 dB

- : ,
-
- L E D

- : 302L
- 7 3
- 4 x
- 1 x
- 4 x




- 2x VitaFresh pro 0°C :
- 1x VitaFresh pro 0°C

-
- :
-


- : 302L
- / : 302L
- (H x W x D): 177.2 cm x 55.6 cm x 54.5 cm
- (H x W x D): 177.5 cm x 56.0 cm x 55.0 cm
- : SN
- : 90W
- : 220 V

- 2x

**8, , 177.5 x 56 cm,
KIF42P60TW**

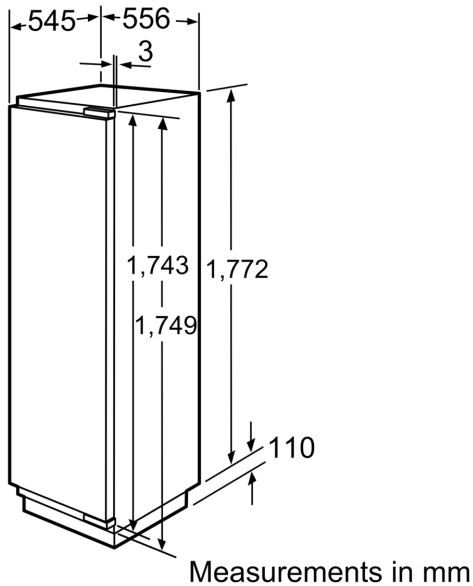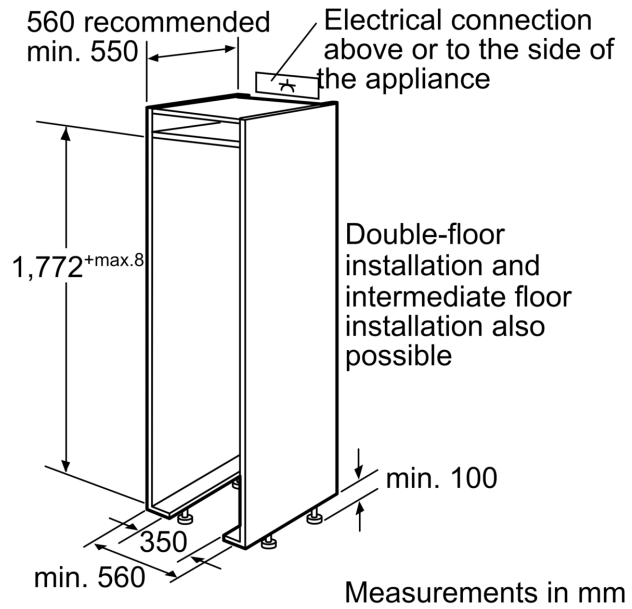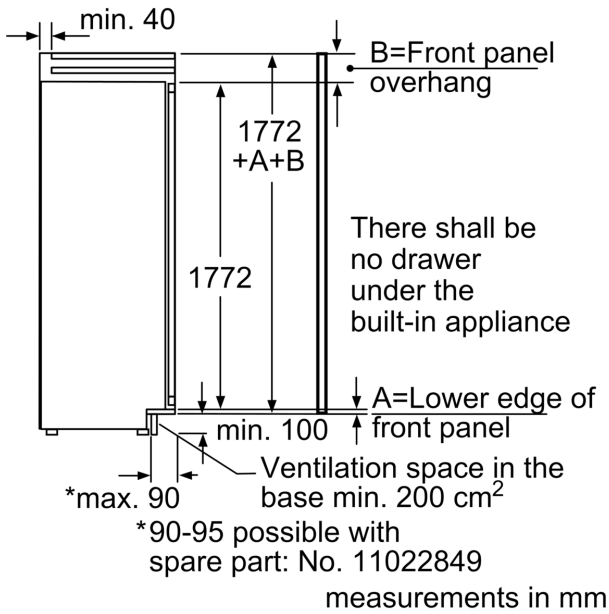

尺寸單位為mm
平面鉸鏈的間隙尺寸建議

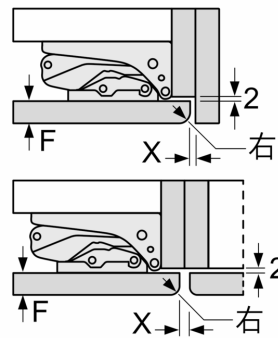

F	右	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

必須遵守表中建議的間隙，以確保設備門不會被碰撞打開並防止損壞廚房家具