

6, , 10 kg, 1400 rpm
WAU28668TC



- WMZ20530G Platform with pull-out
- WMZ20530S Platform with pull-out
- WMZ20530W Platform with pull-out
- WMZ2200 Floor securing component
- WMZ2381 Extension for cold water inlet /Aquastop

i - D O S

- i-DOS :
- EcoSilence™ :
- ActiveWater™ Plus
- AntiVibration™,,
- VarioPerfect™' 65% 50% --

.....
.....
.....
..... 160.0 cm
..... 848 mm
(H x W x D): 848 x 598 x 616 mm
.....
.....95.7 kg
..... 70 l
..... Chrome, blackgray
..... chrome
.....47 dB(A) re 1 pW
..... 500 W
..... 5 A
..... 110 V
..... 60 Hz
.....
..... 110V
..... 59.05 "
..... 35.03 x 26.57 x 28.74
..... 211.000
..... 220.000
.....150.00 cm
.....150.00 cm
..... 890 x 675 x 730 mm
.....100.0 kg
..... 500 W
..... 5 A
..... 110 V
..... 60 Hz
.....
..... 1400 rpm
.....
.....
kg: 10.0 kg




6, , 10 kg, 1400 rpm
WAU28668TC


i- D O S

- : 10 kg
- : 400/600/800/1000/1400
-
- , , / , / , / , , , , / , / , , , 30
- , , , , , , , ,
- VarioPerfect™: ,
- , 125°
- 24: 24
- BLDC 10
- AntiVibration
-
- Sound insulation by additional damping material
-
- ActiveWater™: ,
-
- : 70 L
- 3D AquaSpar: ,
- :
-
- Unbalanced Sensor: 15 ,
-
-
-
- (xx): 84.8 x 59.8 x 61.6 *
- Spin-drying efficiency class: B
- : 47 dB
- : 73 dB
- VarioDrum:
- LED: , , ,
-

6, , 10 kg, 1400 rpm
WAU28668TC

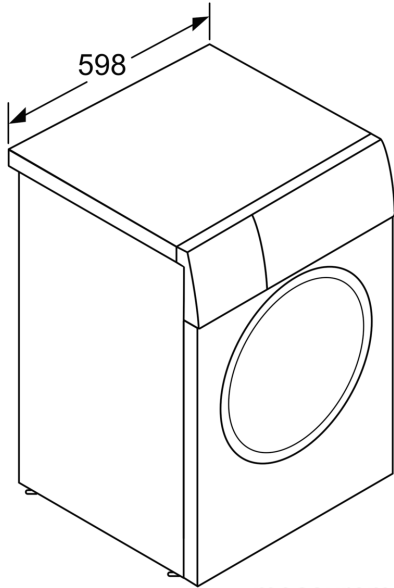

measurements in mm

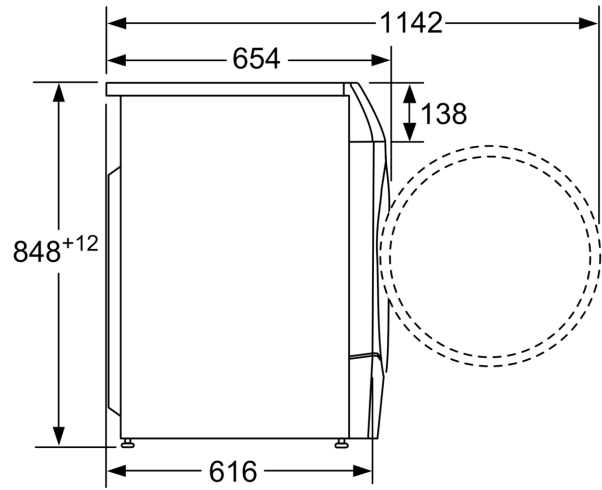

measurements in mm