# 36" Under-Cabinet Wall Hood

500 Series - Stainless Steel DUH36252UC





**DUH36252UC** Stainless Steel

Quickly and quietly clears the air of smoke and odors.

### **Features & Benefits**

Allows you to adjust the performance of your hood to match the type of cooking.

Efficiently filters grease and other solid particles out of the extracted air.

Flexible design gives the ability to recirculate the air back into the kitchen.

General Properties							
Operating mode	Convertible: ducted / recirculating						
Maximum CFM (blower)	400 CFM						
Number of speed settings	4-stage						
Motor location	Integrated motor in hood body						
Number of lights	2 (bulbs not included)						
Bulb type	Halogen						
Light lumens	380						
Light color	2700 K						
Total power of the lamps	100 W						
Damper included	Yes						
Grease filter material	Aluminum						
Grease filter type	Multilayer cassette						
Technical Details							
Watts	335 W						
Volts	120 V						
Frequency	60 Hz						
Plug type	No plug						





Dimensions & Weight							
Overall appliance dimensions (width of canopy included) (HxWxD)	5" x 36" x 20"						
Minimum distance above cooktop / range cooking surface	Min. 24" Electric / Min. 30" Gas						
Diameter of air duct top	7"						
Diameter of air duct back	3 1/4" x 10" Rectangular						
Net weight	41 lbs						
Accessories – Optional							
Replacement charcoal filter	DHZ3602UC						

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST). Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

# 36" Under-Cabinet Wall Hood


500 Series - Stainless Steel DUH36252UC




### **HVI Performance Values**

		Pressure (in. H2O)		Power (W)		CFM		Sones	
Exhaust	Duct Size	High Speed	Working Speed	High Speed	Working Speed	High Speed	Working Speed	High Speed	Working Speed
Vertical	7"	0.1	0.016	335	205	400	170	7.5	1.5
Horizontal	3.25" x 10"	0.1	0.018	325	204	380	160	6.5	1.5
Vertical	3.25" x 10"	0.1	0.02	321	201	360	150	8.5	1.5

### **Installation Details**

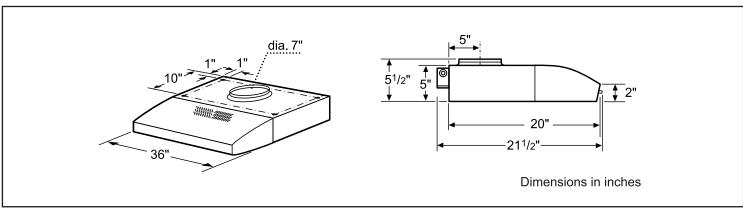

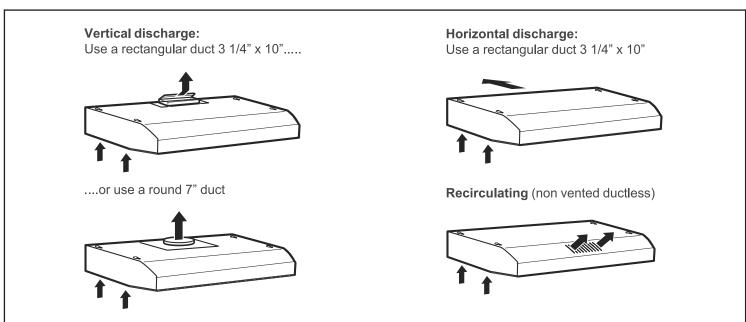

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.