

**Serie | 4, Slideout rangehood, 90 cm,
Silver metallic
DFS097A50A**



- **Extra silent:** the high-performance rangehood, with minimal noise.
- **Grease filtration level:** filters out over 85% of the grease from kitchen air
- **EcoSilence Drive™:** the powerful, energy-saving drive for hoods.
- **LED lighting:** for perfect, energy-efficient illumination of the cooktop.
- **Intensive speed setting:** removes strong kitchen odours especially quickly and effectively.

Technical Data

Typology : Pull-out
Approval certificates : Australia Standards, VDE
Length electrical supply cord : 175 cm
Required niche size for installation (HxWxD) : 385mm x 524.0mm x 290mm mm
Minimum distance above an electric cooktop : 430 mm
Minimum distance above a gas cooktop : 650 mm
Net weight : 14.0 kg
Type of control : Electronic
Number of power settings : 3-stages + intensive setting
Maximum output air extraction : 408 m³/h
Boost position output recirculating : 496 m³/h
Maximum output recirculating air : 358 m³/h
Boost position air extraction : 758 m³/h
Number of lights : 2
Noise level : 54 dB(A) re 1 pW
Diameter of air outlet : 150 / 120 mm
Grease filter material : Washable aluminium
EAN code : 4242005058051
Connection Rating : 146 W
Fuse protection : 10 A
Voltage : 220-240 V
Frequency : 50 Hz
Plug type : AU plug
Installation type : Built-in

Optional accessories

DSZ4565 : Standard recirculation kit
DSZ4920 : Installation kit for 90cm wide wall unit



4 242005 058051

Serie | 4, Slideout rangehood, 90 cm, Silver metallic DFS097A50A


- Maximum extraction 758 m³/h
- Stainless steel fascia panel/pelmet included
- EcoSilence BLDC brushless motor

2 year warranty


- Noise level according to EN 60704-3 exhaust air:
Max. normal use: 54 dB(A) re 1 pW
Intensive: 69 dB(A) re 1 pW
- Average Energy Consumption: 38.5 kWh/year
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 407 m³/h
Intensive 758 m³/h

Installation in 90cm cupboard requires additional installation accessory DSZ4920 which can be purchased separately.


Serie | 4, Slideout rangehood, 90 cm, Silver metallic DFS097A50A

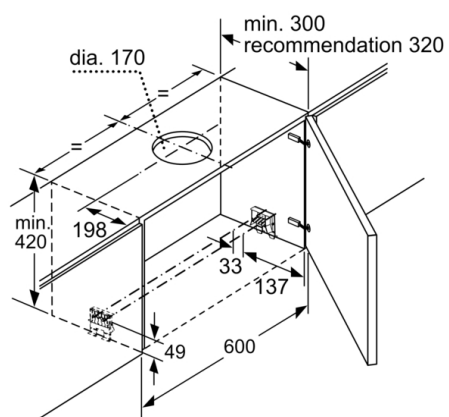


measurements in mm

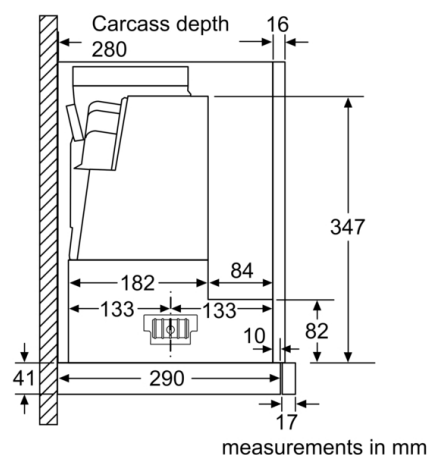


measurements in mm

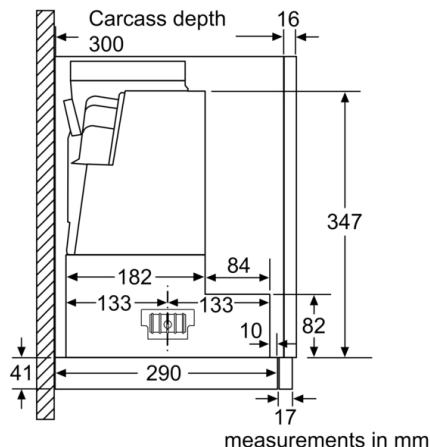


measurements in mm

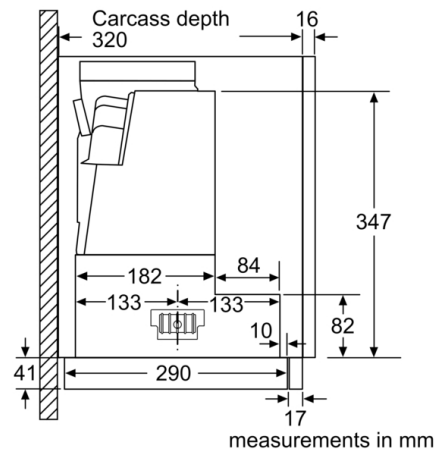

measurements in mm

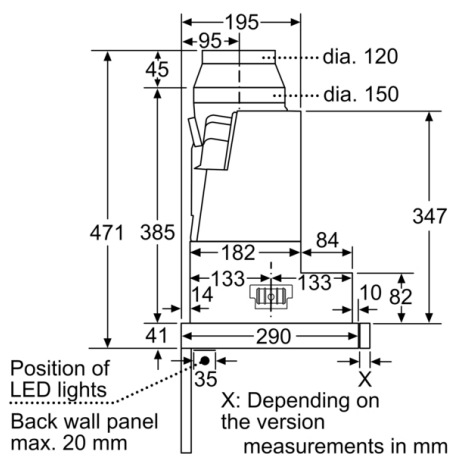


measurements in mm

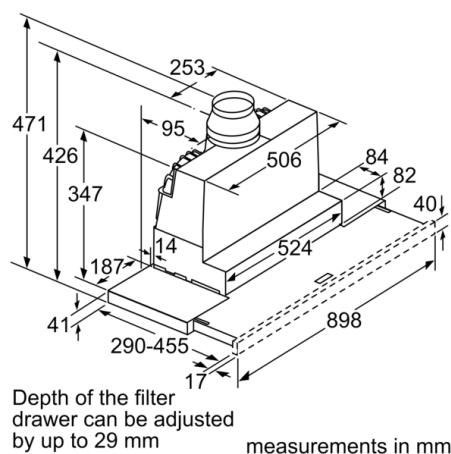

Depth of the filter drawer can be adjusted by up to 29 mm

measurements in mm

Serie | 4, Slideout rangehood, 90 cm, Silver metallic DFS097A50A

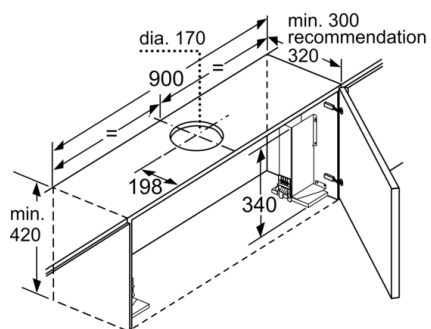

When installing the 90 cm telescopic hood in a 90 cm wide wall-hanging cupboard, a mounting kit is required. The two mounting brackets are screwed onto the left and right of the kitchen unit. Installation in accordance with template.
measurements in mm