

Series 6, built-under fridge, 82 x 60 cm, soft close flat hinge KUR15ADF0



Included accessories

1 x egg tray

The built-under refrigerator with MultiBox: ideal storage location for your fresh fruits and vegetables.

- **LED lighting:** keep your groceries in perfect view.

Technical Data

Gross weight: 82.000 lbs
 Energy Efficiency Class (Regulation (EU) 2017/1369): F
 Average annual energy consumption in kilowatt hour per year (kWh/a) (EU) 2017/1369: 114 kWh/annum
 Sum of volume of frozen compartments (EU 2017/1369): 0 l
 Sum of volume of chill compartments (EU 2017/1369): 137 l
 Airborne acoustical noise emissions (EU 2017/1369): 38 dB(A) re 1 pW
 Airborne acoustical noise emission class (EU 2017/1369): C
 Built-in / Free-standing: Built-in
 Number of compressors: 1
 Number of independent cooling systems: 1
 Width of the appliance: 598 mm
 Height: 820 mm
 Depth of the product: 548 mm
 Net weight: 34.1 kg
 Required niche size for installation (HxWxD): 820 x 600 x 550 mm
 Door panel options: Possible but accessory
 Door hinge: Right reversible
 Number of Adjustable Shelves in fridge compartment: 2
 Shelves for Bottles: No
 Frost free system: No
 Interior ventilator: No
 Reversible Door Hinge: Yes
 Length electrical supply cord: 230 cm
 Noise level: 38 dB(A) re 1 pW
 Multi-Flow Air Tower: No
 Economy setting: No
 Cold technology: 1 compressor/1 cold circuit
 Fast cooling switch: No
 Temperature Controlled Drawer: No
 Humidity Control Drawer: No
 Number of Door Bins - Refrigerator: 3
 Door bin adjustability - Refrigerator: No
 Tilt-out door bins in fridge: Yes
 Gallon wide door bins: Yes
 Number of Gallon storage: 3
 No. of shelves in fridge: 3
 Motorized Shelf: No
 Material of the shelves: Glas, plastic
 Door opened indicator freezer: No
 Connection Rating: 90 W
 Fuse protection: 10 A
 Voltage: 220-240 V
 Frequency: 50 Hz
 Approval certificates: CE, Morocco, Ukraine, VDE
 Main colour of product: N/A
 Door panel options: Possible but accessory
 Installation typology: Built-under
 Noise level: 38 dB(A) re 1 pW
 Energy Star Qualified: No
 Plug type: GARDY plug w/ earthing
 Required cutout/niche size for installation (in): x x
 Dimensions of the packed product: 35.03 x 26.37 x 24.40
 Net weight: 75.000 lbs



Series 6, built-under fridge, 82 x 60 cm, soft close flat hinge KUR15ADF0

**The built-under refrigerator with MultiBox:
ideal storage location for your fresh fruits
and vegetables.**

Performance and consumption

- can be built under/between, fully integr

Design and Styling

- Ventilation in plinth, no cut-out in the worksurface necessary
- Easy clean interior

Convenience & Safety

- Electromechanical temperature control
- Automatic defrost in fridge section

Fridge Compartment

- 3 safety glass shelves, of which 2 are height adjustable
- 3 door trays high
- Bottle holder in x-deep door tray
- LED interior light

Freshness System Freshness System

- 2 MultiBox drawers - Transparent drawers with a corrugated bottom, ideal for storing fruits and vegetables.

Technical Information

- Height adjustable feet in the front
- Door right hinged, reversible
- Connected load: 90 W
- Nominal voltage: 220 - 240 V

Dimensions

- Niche Dimension (H x W x D): 82.0 cm x 60.0 cm x 55.0 cm
- Appliance Dimensions (H x W x D): 82.0 cm x Appliance width: 59.8 cm x 54.8 cm


Accessories

- Accessories: 1 x egg tray

General Information

Environment and Safety


Series 6, built-under fridge, 82 x 60 cm, soft close flat hinge KUR15ADF0

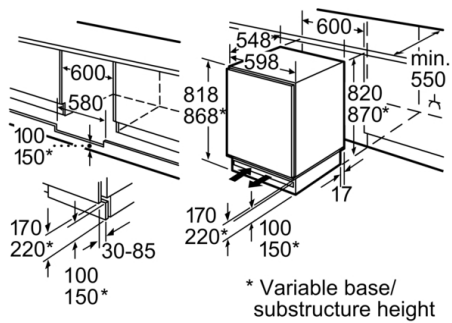

Space for electrical connection next to the appliance on the left or right-hand side.
Ventilation space in the base.


Measurements in mm

measurements in mm
Recommended gap dimensions for flat hinges



	F	R	X
16-19	0-3	2.5	
20	0-1	3	
	2-3	2.5	
21	0-1	3	
	2-3	2.5	
22	0	4	
	1	3.5	
	2-3	3	

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.



Maximal permissible weight of the unit fronts

Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges

Δ Weight
A: Appliance door height including hinges in mm
B: Undamped hinge, unit front in kg
C: Damped hinge, unit front in kg

A	B	C
1500-1750	22	22
720-1400	19	19
A1	15	19
A2	15	19