

**Series 8, steamer, 60 x 45 cm,
Stainless steel
CDG634AS0**



The steamer: prepare foods especially gently, retaining the aroma and vitamins.

- **Steam function:** for gentle, healthy food preparation.
- **TFT display control:** easy-to-use thanks to the control ring with full text and symbols.
- **SoftMove:** the oven door opens and closes especially gently and quietly.

Technical data

Color / Material Front : Stainless steel
Built-in / Free-standing : Built-in
Min. required niche size for installation (HxWxD) : 450-455 x 560-568 x 550 mm
Dimensions : 455 x 594 x 548 mm
Dimensions of the packed product (HxWxD) : 520 x 650 x 710 mm
Control Panel Material : Stainless steel
Door Material : Glass
Net weight : 24.6 kg
Length electrical supply cord : 150.0 cm
Connection Rating : 1750 W
Fuse protection : 10 A
Voltage : 220-240 V
Frequency : 50; 60 Hz
Plug type : GARDY plug w/ earthing
Included accessories : 1 x steam container, punched, size L, 1 x steam container, unpunched, size L, 1 x sponge

Included accessories

1 x steam container, punched, size L, 1 x steam container, unpunched, size L, 1 x sponge



Series 8, steamer, 60 x 45 cm, Stainless steel CDG634AS0

**The steamer: prepare foods especially
gently, retaining the aroma and vitamins.**

Programmes/ Additional Features:

- Compact steamer with these heating methods: Steam, Reheat, Prove, defrost

Key Features:

- automatic programmes 20
- Rotary swivel
- Halogen lighting, Switch for oven illumination at cavity
- Electronic clock
- Childproof lock
Automatic switch off Start button door contact switch
- Temperature proposal
Actual temperature display Heating-up control

Design:

- Number of shelf levels: 3 PC
- Cavity inner surface: stainless steel
- Door hinge: bottom, softClose door, softOpen door
- Integrated water reservoir that does not require direct water connection

Technical Information:


- Cavity volume: 38L
- Temperature range 30 °C - 100 °C
- Water tanks capacity 1.3 l
- Total connected load: 1.75kW

Dimensions (H x W x D):

- 455 mm x 594 mm x 548 mm
- Please reference the built-in dimensions provided in the installation drawing

Series 8, steamer, 60 x 45 cm, Stainless steel CDG634AS0


Installation with a hob.

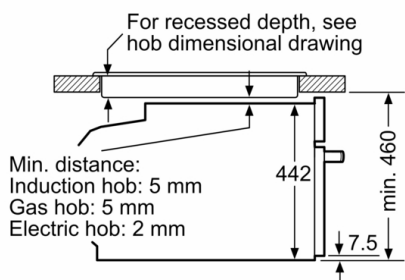


measurements in mm

If the compact appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.


Hob type	min. worktop thickness	
	fitted	flush
Induction hob	42 mm	43 mm
Full surface Induction hob	52 mm	53 mm
Gas hob	32 mm	43 mm
Electric hob	32 mm	35 mm

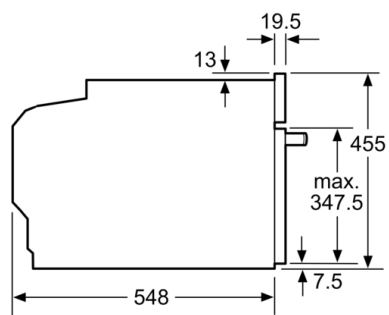

measurements in mm

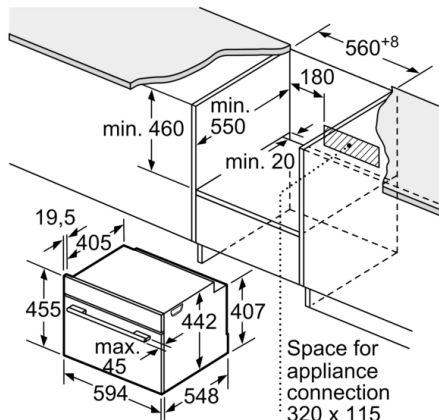

measurements in mm

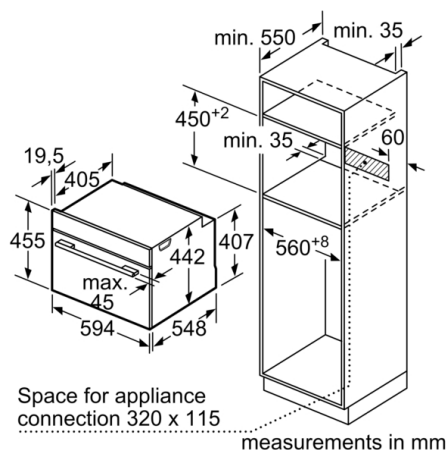

measurements in mm