


Series 6, Gas hob, 90 cm, Tempered glass, Black PPM9A6I40

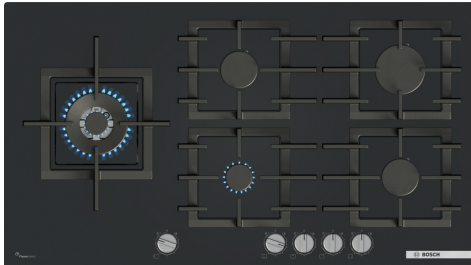

Optional accessories

HEZ32WA00 Wireless food thermometer
HEZ9SE040 4 pieces Set

The gas hob with precise flame control and easy cleaning thanks to detachable metallic dials and dishwasher suitable cast iron pan supports.

- **Flame Select:** Enjoy precise control of the flame.
- **Tempered Glass:** for strength and aesthetic.
- **Dishwasher-suitable pan supports:** Easy, scrub-free cleaning.
- **Removable dials:** effortless cleaning, happier cooking.
- **Easy cleaning:** detachable dials and dishwasher-suitable pan supports make cleaning a breeze.

Technical Data

Product name/family:gas hob w integrated controls
Built-in / Free-standing: Built-in
Energy input:Gas
Number of cooking zones:5
Required niche size for installation (HxWxD): 45 x 850-850 x 490-500 mm
Width of the appliance:915 mm
Dimensions: 45x915x520 mm
Dimensions of the packed product (HxWxD): 170x1120x660 mm
Net weight:22.9 kg
Gross weight: 26.3 kg
Residual heat indicator: without
Location of control panel: Front
Basic surface material: Tempered glass
Color of surface:Black
Color of frame:Black
Length electrical supply cord: 100 cm
EAN code: 4242005496242
Gas connection rating: 11500 W
Fuse protection:3 A
Voltage: 220-240 V
Frequency: 60; 50 Hz



4 242005 496242

Series 6, Gas hob, 90 cm, Tempered glass, Black PPM9A6I40

The gas hob with precise flame control and easy cleaning thanks to detachable metallic dials and dishwasher suitable cast iron pan supports.

- Min. worktop thickness: 20 mm
- If installed flush, minimum worktop thickness is 30mm.
- Power cord: 1 m
- Connected load: 11.5 KW

Design

- Tempered glass surface, Black
- frameless: install the hob either flush or slightly raised on the worktop
- Cast iron pan supports with rubber feet

Usage convenience

- FlameSelect: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials, front: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 gas burners
- Left: WOK burner up to 4 KW (depending on gas type)
- Center front: Economy burner up to 1 KW (depending on gas type)
- Center rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: High-speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Cleaning

- Removable control dials for easy cleaning between dials.
- Dishwasher suitable pan supports for easy cleaning.
- Cast iron pan supports with rubber feet: little weight and compact form, yet high stability due to continuous surface.

Safety


- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar
- Natural gas H 25 mbar (HU)
- Natural gas L 25 mbar (NL)
- Liquid gas G30,31 28-30/37mbar
- Liquid gas G30 37 mbar (PL)
- Liquid gas 50 mbar
- Pre-set for natural gas
- Nozzle set for LPG jets included. Connection to 28-30/37 mbar bottled gas. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 54 x 915 x 520
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 500)

Series 6, Gas hob, 90 cm, Tempered glass, Black PPM9A6I40

Measurements in mm

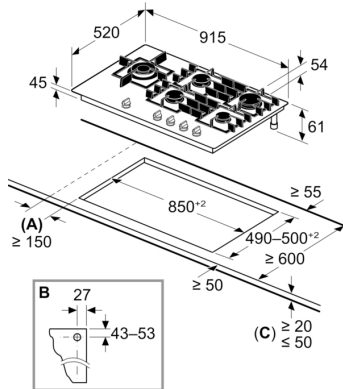

A: Min. distance from the hob cut-out to the wall

B: Position of gas connection in the cut-out

C: With fitted oven underneath possibly more; see space requirements for the oven

For worktop thickness between 12 mm to 20 mm need additional spacer, contact customer service for details