

Series 2, Wall-mounted canopy rangehood, 90 cm, Stainless steel DWP96BC50A



DHZ1224	Chimney extension 500 mm
DHZ1234	Chimney extension 750 mm
DHZ5275	Standard recirculation kit
DHZ5276	Standard odor filter (replacement)
DHZ9550	Brushed steel back panel
DHZ9551	Brushed steel back panel

Pyramid hood: perfect performance matching your kitchen.

- 3-Speed Power Level Options To Suit Your Cooking Style And Recipes
- Dishwasher safe aluminum mesh filters
- Converts to Recirculation Mode with Accessory Kit (Separate Purchase Required)

Color chimney:Stainless steel
 Typology:Wall-mounted
 Length electrical supply cord:130.0 cm
 Height of the chimney:553-730/573-730 mm
 Height of product, without chimney:246 mm
 Minimum distance above an electric hob:600 mm
 Minimum distance above a gas hob:650 mm
 Net weight:10.2 kg
 Type of control:mechanical
 Number of speed settings:3
 Max. air extraction:626 m³/h
 Max. air recirculation:409 m³/h
 Number of lights:2
 Noise level:69 dB(A) re 1pW
 Diameter of air outlet:120 / 150 mm
 Grease filter material:Washable aluminium
 EAN code:4242005100651
 Connection rating:220 W
 Fuse protection:10 A
 Voltage:220-240 V
 Frequency:50; 60 Hz
 Plug type:AU plug
 Installation type:Wall-mounted



4 242005 100651

Series 2, Wall-mounted canopy rangehood, 90 cm, Stainless steel DWP96BC50A

**Pyramid hood: perfect performance
matching your kitchen.**

Design

- Pyramidal
- Appliance colour: Stainless steel
- push buttons

Operating and power

- Extraction rate exhaust air according to EN 61591 max. 626 m³/h
- Extraction rate in recirculation mode:
 - Max. normal use: 409 m³/h
- Noise level in recirculation mode:
 - Max. normal use: 75 dB(A) re 1 pW
- Average Energy Consumption: 41.7 kWh/year*


Comfort & Convenience

- Dishwasher safe metal grease filters
- 2 x 3W LED Lights

Technical Information

- For Wall mounted installation
- Suitable for ducted or recirculating operation
- Appliance (ducted air): 799-975 x 900 x 500 mm
- Dimensions exhaust air (HxWxD): 799-975 x 900 x 500 mm
- Dimensions recirculating (HxWxD): 799-975 x 900 x 500 mm
- Electrical cable length 1.3 m
- 220 W total connected load


Series 2, Wall-mounted canopy rangehood, 90 cm, Stainless steel DWP96BC50A

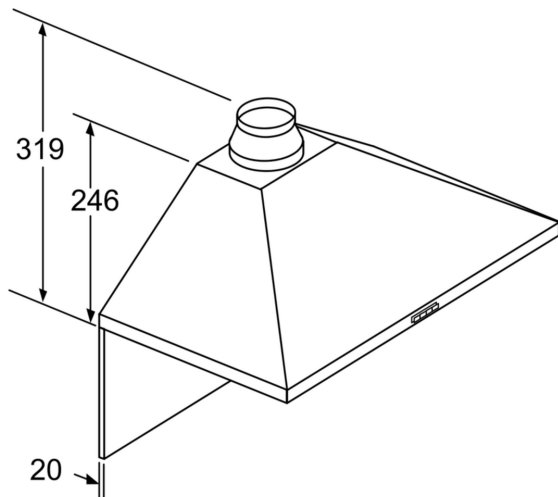

If a back panel is used,
the design of the appliance
must be considered.

measurements in mm

Measurements in mm

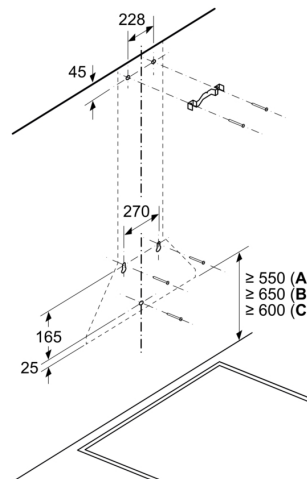


A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand

Measurements in mm

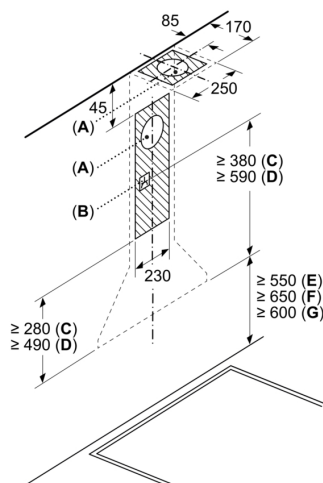

A: Exhaust-air outlet

B: Socket


C: Exhaust air

D: Circulated air

E: Electric

F: Gas - from upper edge of pan support

G: Electric - for Australia and New Zealand

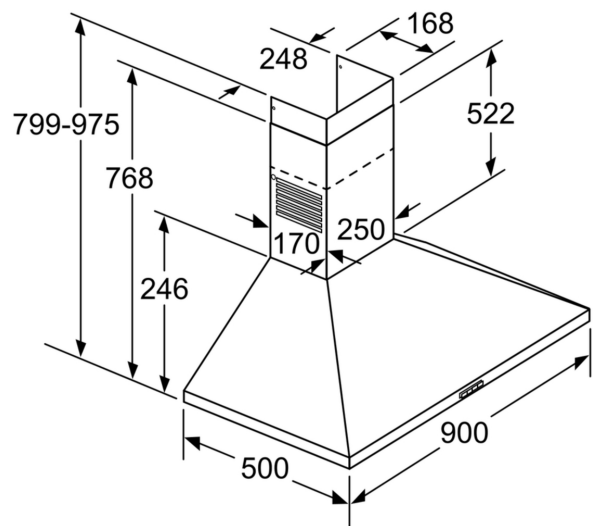

measurements in mm